



WIS 26 – Project ID 1390-06-00/70

WIS 33 to Milligan Road

Town of Oak Grove, Burnett, and Chester

Shaun Anderson, P.E.

WisDOT Project Manager

Public Involvement Presentation

January 2022



Dodge County


Presentation outline

- Location
- Purpose and need
- Proposed improvements
- Traffic impacts and detours
- Schedule
- Contact information
- Comments



Existing WIS 26

Project location

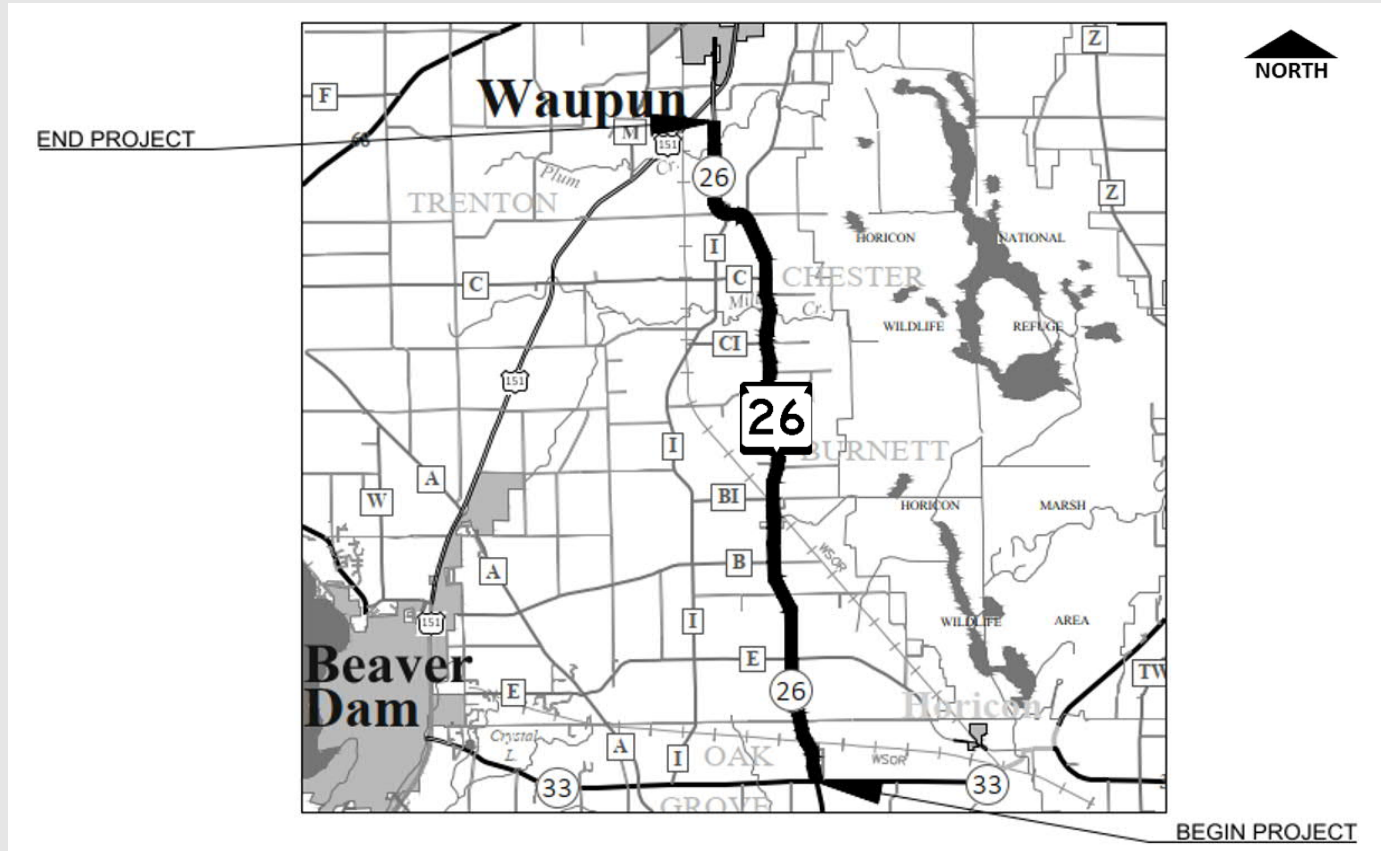

- Limits

- Begins just north of the WIS 33 intersection and ends just south of Milligan Road.

- Length

- 10.9 miles

Project purpose and need

- Purpose

- The purpose of the project is to improve the pavement surface.

- Need

- The existing pavement is deteriorated with extensive cracking, crumbling at the pavement edges, and has poor ride quality. Without improvements, the existing pavement will continue to deteriorate, resulting in increased maintenance costs.



Proposed improvements

- Proposed improvements along the corridor include:
 - Mill and overlay the existing asphalt pavement.
 - Increase the paved shoulder width from three feet to five feet with the use of Highway Improvement Safety Funds.



Proposed improvements (cont.)

- Additional improvements include:
 - Replace existing guardrail near Mill Creek and Plum Creek crossings.
 - Replace deteriorated roadway cross culverts.
 - Install centerline and shoulder rumble strips.
 - Railroad crossing improvements (done by Wisconsin and Southern Railroad).
 - Crossing ~ 200 feet north of Maple Street in Minnesota Junction
 - Crossing ~200 feet south of Clay Street in Burnett




Traffic impacts and detours

- Detour (local access only)
 - During culvert pipe replacements and railroad crossing improvements, WIS 26 will be open to local access only; through traffic will be detoured on state highways.
- Flagging operations
 - Upon completion of the culvert pipe replacements and railroad crossing improvements, the resurfacing of WIS 26 will occur during the use of single-lane closures under flagging operations.



Traffic impacts and detours (cont.)

- Detour Route: WIS 26–WIS 33–US 151–WIS 26

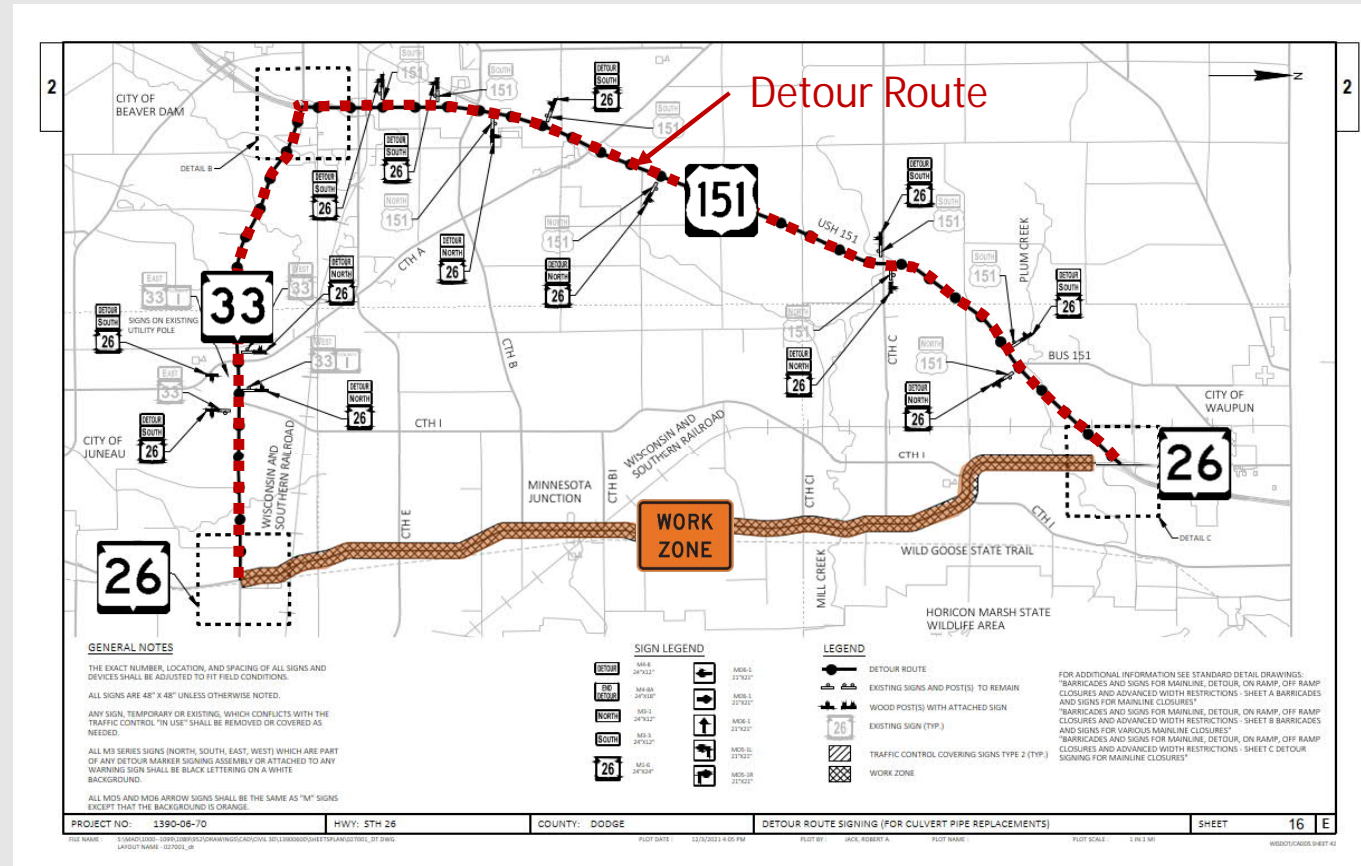

Note: During culvert pipe replacements and railroad crossing improvements.



Project Schedule

- Environmental process complete – March 2022
- Preliminary design complete – March 2022
- Final plans complete – August 2023
- Construction – Spring/Summer 2024



Project contact information

Shaun Anderson, P.E.

WisDOT Project Manager

SW Region – Madison Office

2101 Wright Street

Madison, WI 53704

ShaunM.Anderson@dot.wi.gov

(608) 246-5324

Ken Swanson, P.E.

Consultant Project Manager

Strand Associates, Inc.

910 West Wingra Drive

Madison, WI 53715

ken.swanson@strand.com

(608) 251-4843



Comments

Public comment forms are available on the WisDOT webpage.

Public Involvement Comment Form

Project ID 1390-06-00
Watertown - Waupun
WIS 33 to 0.2 MI S of Milligan Rd
WIS 26, Dodge County

Please mail your comments by February 18, 2022, to the address on the back of this sheet. Comments can also be e-mailed to shaunm.anderson@dot.wi.gov and ken.swanson@strand.com. Your comments assist us in developing a project that will serve the needs of the traveling public as well as the needs of the local community. Your input is welcome and appreciated throughout the design process.

Name: _____

Address: _____

Daytime Phone Number (optional): _____

Email Address (optional): _____

Please Print Comments (attach additional sheets if necessary)

The information in this document including names, addresses, phone numbers, e-mail addresses, and signatures is not confidential, and may be subject to disclosure upon request, pursuant to the requirements of the Wisconsin open records law, sections 19.31 - 19.39 of the Wisconsin Statutes.

Thank you for your comments!





WIS 26 – Project ID 1390-06-00/70
WIS 33 to Milligan Road
Town of Oak Grove, Burnett, and Chester

Thank you for your interest
and comments!

Public Involvement Presentation

January 2022



Dodge County