



"A" TO BE GIVEN TO THE NEAREST 1"
 "B" = $\frac{1}{4}("A" + 3 "C")$ [MIN.]
 "B" = $\frac{1}{4}("A" + 3 "C") + 3$ [MAX.]

RECORD DIMENSIONS
 "A", "B" & "C"
 ON FINAL PLANS.

LOCATION OF DRAPED STRANDS



PLAN VIEW


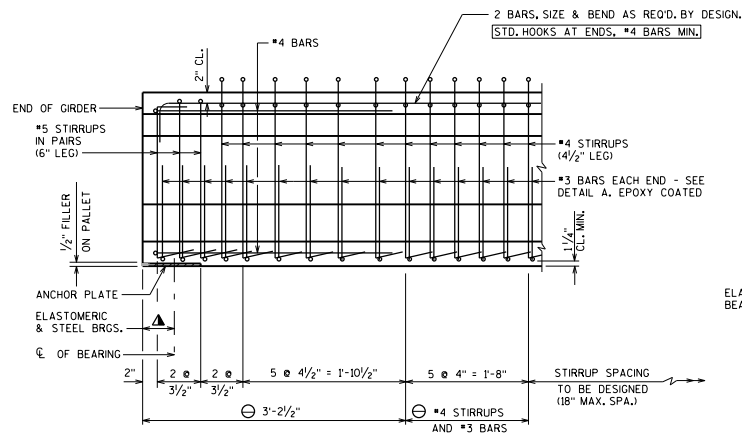


SUPPORT WITH STEEL OR ELASTOMERIC BRGS.


SIDE VIEW OF GIRDER

⊙ DETAIL TYPICAL AT EACH END

SUPPORT WITH 1/2" ELASTOMERIC BRG. PAD



DETAIL A

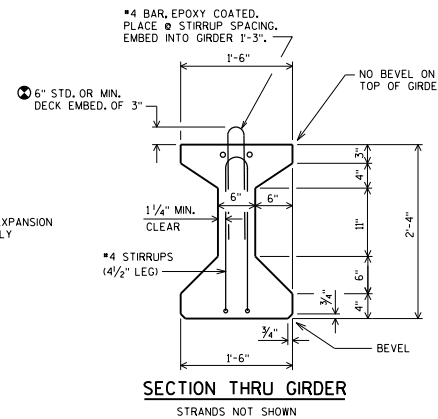

SECTION THRU GIRDER

SECTION THRU GIRDER

SHOWING WELDED WIRE FABRIC (WWF) STIRRUPS ASTM A1064 (FY = 70 KSI)

NOTES

TOP OF GIRDER TO BE ROUGH FLOATED AND BROOMED TRANSVERSELY, EXCEPT THE OUTSIDE 2" OF GIRDER, WHICH SHALL RECEIVE A SMOOTH FINISH. AN APPROVED CONCRETE SEALER SHALL BE APPLIED TO ALL SMOOTH SURFACES INCLUDING THE OUTSIDE 2" OF THE TOP FLANGE.

DO NOT APPLY CONCRETE SEALER OR EPOXY TO SURFACES RECEIVING APPLICATION OF CONCRETE STAINING.

THE GIRDERS SHALL BE PROVIDED WITH A SUITABLE LIFTING DEVICE FOR HANDLING AND ERECTING THE GIRDERS. SEE SECTION 503.3.4 OF STANDARD SPECIFICATIONS FOR GUIDANCE.

STRANDS SHALL BE FLUSH WITH END OF GIRDER. FOR GIRDER ENDS EMBEDDED COMPLETELY IN CONCRETE, END OF STRANDS SHALL BE COATED WITH NON-BITUMINOUS JOINT SEALER. FOR GIRDER ENDS THAT ARE FINALLY EXPOSED, COAT THE GIRDER ENDS, EXPOSED STRAND ENDS AND ALL NON-BONDING SURFACES WITHIN 2 FEET OF THE GIRDER ENDS WITH A NON-PIGMENTED EPOXY CONFORMING TO AASHTO M-295 TYPE III, GRADE 2, CLASS B OR C. THE EPOXY SHALL BE APPLIED AT LEAST 3 DAYS AFTER MOIST CURING HAS CEASED AND PRIOR TO THE APPLICATION OF THE SEALER.

ALL GIRDERS SHALL BE CAST FULL LENGTH AS SHOWN.

SPACING SHOWN FOR #4 STIRRUPS IS FOR GRADE 60 REINFORCEMENT.

AN EQUIVALENT OF WELDED WIRE FABRIC (WWF) ASTM A1064 MAY BE SUBSTITUTED FOR THE STIRRUP REINFORCEMENT SHOWN, UPON APPROVAL OF THE STRUCTURES DESIGN SECTION. IF USED, WWF SUBSTITUTION DETAILS SHALL BE SUBMITTED ELECTRONICALLY TO THE WSDOT FABRICATION LIBRARY AND ACCEPTED PRIOR TO SHOP DRAWING SUBMITTAL.

PRESTRESSING STRANDS SHALL BE (1 DIA.) 7-WIRE LOW-RELAXATION STRANDS WITH AN ULTIMATE STRENGTH OF 270,000 PSI.

DESIGNER NOTES

BID ITEM SHALL BE "PRESTRESSED GIRDER TYPE I 28-INCH".

SPECIFY CONCRETE STRENGTH AS REQUIRED BY DESIGN FROM A MINIMUM OF 6,000 PSI TO A MAX. OF 8,000 PSI. MAXIMUM RELEASE STRENGTH IS 6000 PSI. USE ONLY 0.5" DIA. STRAND FOR THE DRAPED PATTERN. THE MAX. NUMBER OF DRAPED 0.5" DIA. STRANDS IS 8. USE 0.6" DIA. FOR THE STRAIGHT PATTERN, UNLESS ONLY 0.5" DIA. WORK FOR KEEPING STRESSES AT ACCEPTABLE LEVELS.

REINFORCEMENT IN STANDARD END SECTION OF THE GIRDER IS BASED ON THE STANDARD STRAND PATTERNS LISTED ON STANDARD 19.02 AND THE SPAN LENGTHS SHOWN IN TABLE 19.3-1. USING DIFFERENT STRAND PATTERNS OR LONGER SPANS WILL REQUIRE A COMPLETE DESIGN OF THIS REINFORCEMENT, WHICH REQUIRES PRIOR APPROVAL FROM THE BUREAU OF STRUCTURES.

SHOW ONLY ONE STRAND SIZE ON THE PLANS.

▲ VARIES FOR ELASTOMERIC BRGS. (STD. 27.07) AND STEEL BRGS. (STD. 27.09)


● THE DESIGN ENGINEER DETERMINES THIS VALUE BASED ON 2" MIN. HAUNCH AT EDGE OF GIRDER, X-SLOPE, PROFILE GRADE LINE AND CALCULATED RESIDUAL GIRDER CAMBER, INCLUDING THE CAMBER MULTIPLIER OF 1.4. THIS VALUE CAN VARY AND SHOULD BE GIVEN FOR EACH 1/3 OF THE GIRDER LENGTH. PROVIDE VALUES THAT MAINTAIN 3" MIN. DECK EMBEDMENT AND 2 1/2" CLEAR FROM TOP OF DECK WHILE ACCOUNTING FOR 3/4" VARIANCE IN ACTUAL CAMBER VERSUS THE CALCULATED RESIDUAL CAMBER.

PROVIDE STIRRUP SPACING THAT IS SYMMETRICAL ABOUT THE C/L OF GIRDER.

● 4 BAR, EPOXY COATED. PLACE @ STIRRUP SPACING REQUIRED FOR NON WWF STIRRUPS. EMBED INTO GIRDER 1'-3".

AREA OF HORIZ. WIRE SHALL BE > 40% OF VERT. WIRE AREA (ASTM A1064)

HORIZ. WIRES SHALL BE LOCATED IN TOP AND BOTT. FLANGES AND NOT IN THE WEB.




SECTION THRU GIRDER

SHOWING WELDED WIRE FABRIC (WWF) STIRRUPS ASTM A1064 (FY = 70 KSI)


28" PRESTRESSED GIRDER DETAILS




APPROVED: Laura Shadewald DATE: 7-23




8 STRANDS




10 STRANDS




12 STRANDS



14 STRANDS




*16 STRANDS




*18 STRANDS

* MAY REQUIRE DEBONDING AT ENDS, WHICH IS TO BE AVOIDED.


STANDARD ARRANGEMENTS TO RAISE CENTER OF GRAVITY TO AVOID DRAPING OF 0.6" DIA. STRANDS
(0.5" DIA. STRANDS MAY ALSO BE USED)




8 STRANDS




10 STRANDS




12 STRANDS



14 STRANDS



16 STRANDS



18 STRANDS

ARRANGEMENT AT $\frac{1}{4}$ SPAN - FOR GIRDERS WITH DRAPED 0.5" DIA. STRANDS

28" GIRDER

A = 312 SQ. IN.
 $r^2 = 91.95 \text{ IN.}^2$
 $y_T = 14.58 \text{ IN.}$
 $y_B = -13.42 \text{ IN.}$
 $I = 28,687 \text{ IN.}^4$
 $S_T = 1,968 \text{ IN.}^3$
 $S_B = -2,138 \text{ IN.}^3$
 WT. = 325 #/FT.

PRE-TENSION

$f_s = 270,000 \text{ P.S.I.}$
 $f_s = 0.75 \times 270,000 = 202,500 \text{ P.S.I.}$
 for low relaxation strands
 $P_i \text{ PER } 0.5" \text{ DIA. STRAND} = 0.1531 \times 202,500 = \underline{31,00 \text{ KIPS}}$
 $P_i \text{ PER } 0.6" \text{ DIA. STRAND} = 0.217 \times 202,500 = \underline{43,94 \text{ KIPS}}$
 $\frac{y_B}{r^2} = \frac{-13.42}{91.95} = -0.1459 \text{ IN./IN.}^2$
 $f_B (\text{ini t.}) = \frac{A_s f_s}{A} \left(1 + \frac{e_s y_B}{r^2} \right)$

(COMPRESSION IS POSITIVE)

NO. STRANDS	e_s (inches)	$P(\text{ini t.}) = A_s f_s$ (KIPS)	$f_B (\text{ini t.})$ (K/sq.in.)
STANDARD STRAND PATTERNS FOR UNDRAPED STRANDS (0.6" DIA.)			
8	-10.42	352	2,844
10	-9.82	439	3,424
12	-8.75	527	3,846
14	-7.99	615	4,269
*16	-9.42	703	5,351
*18	-9.64	791	6,102
STANDARD STRAND PATTERNS FOR UNDRAPED STRANDS (0.5" DIA.)			
8	-10.42	248	2,004
10	-9.82	310	2,418
12	-8.75	372	2,715
14	-7.99	434	3,013
16	-9.42	496	3,775
18	-9.64	558	4,305

(COMPRESSION IS POSITIVE)

NO. STRANDS	e (inches)	$P(\text{ini t.}) = A_s f_s$ (KIPS)	$f_B (\text{ini t.})$ (K/sq.in.)
STANDARD STRAND PATTERNS FOR DRAPED STRANDS (0.5" DIA.)			
8	-10.42	248	2,004
10	-10.62	310	2,534
12	-10.42	372	3,006
14	-10.0	434	3,421
16	-9.42	496	3,775
18	-9.64	558	4,305

DESIGNER NOTES

ON THE STRAND PATTERN SHEET, PLACE A BOX AROUND EACH STRAND PATTERN THAT APPLIES TO THE DESIGNED STRUCTURE AND LABEL THE SPAN IT IS USED IN.


28" PRESTRESSED GIRDER DESIGN DATA

BUREAU OF


STRUCTURES

APPROVED: *Laura Shadewald*

DATE:
1-22




SECTION A-A

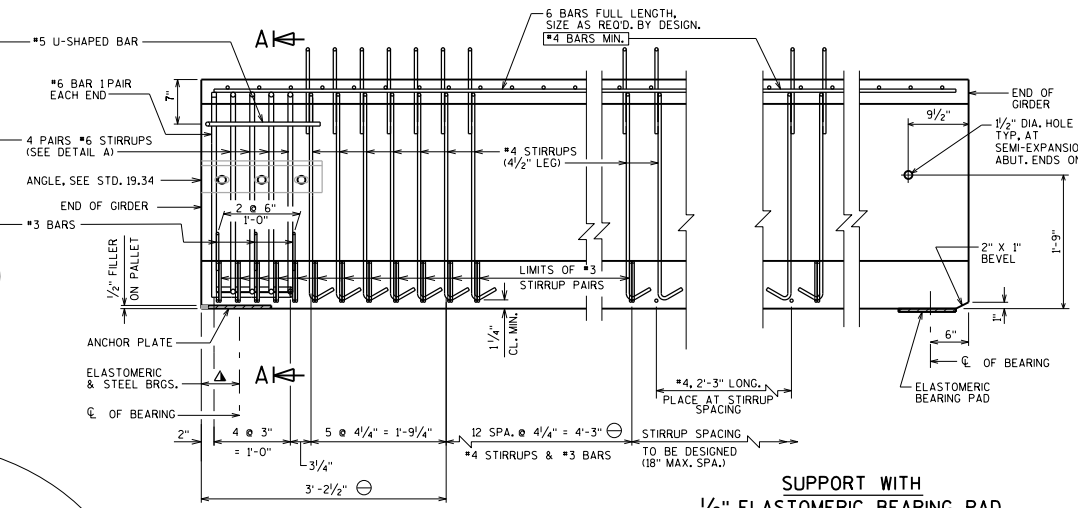


SUPPORT WITH STEEL OR ELASTOMERIC BRGS.


SUPPORT WITH 1/2" ELASTOMERIC BEARING PAD

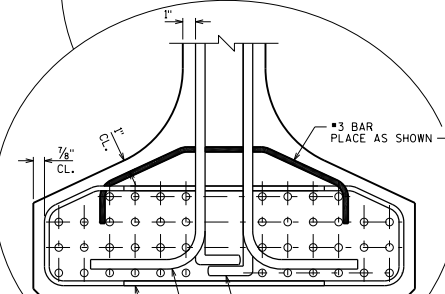


DETAIL A
BOTTOM FLANGE

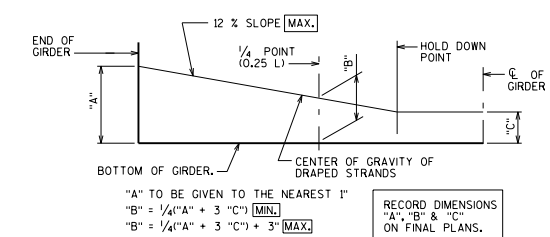

LOCATION OF DRAPED STRANDS

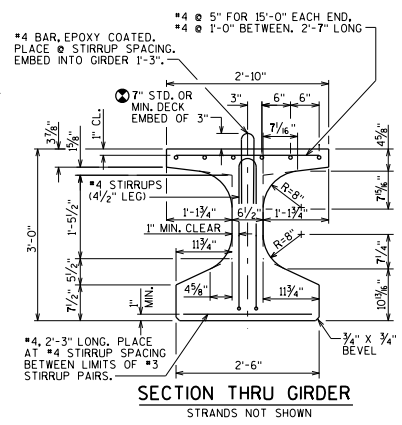

SECTION THRU GIRDER
STRANDS NOT SHOWN

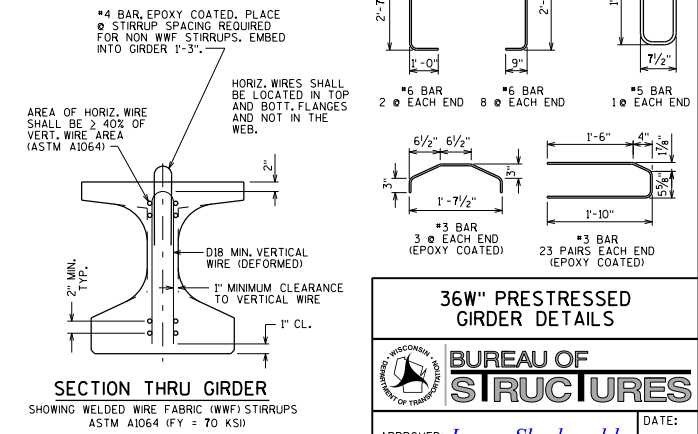

SECTION THRU GIRDER
SHOWING WELDED WIRE FABRIC (WWF) STIRRUPS
ASTM A1064 (FY = 70 KSI)

NOTES

TOP OF GIRDER TO BE ROUGH FLOATED AND BROOMED TRANSVERSELY. EXCEPT THE OUTSIDE 8" OF GIRDER, WHICH SHALL RECEIVE A SMOOTH FINISH. AN APPROVED CONCRETE SEALER SHALL BE APPLIED TO ALL SMOOTH SURFACES INCLUDING THE OUTSIDE 8" OF THE TOP FLANGE.

DO NOT APPLY CONCRETE SEALER OR EPOXY TO SURFACES RECEIVING APPLICATION OF CONCRETE STAINING.

THE GIRDERS SHALL BE PROVIDED WITH A SUITABLE LIFTING DEVICE FOR HANDLING AND ERECTING THE GIRDERS. SEE SECTION 503.3.4 OF STANDARD SPECIFICATIONS FOR GUIDANCE.

STRANDS SHALL BE FLUSH WITH END OF GIRDER. FOR GIRDER ENDS EMBEDDED COMPLETELY IN CONCRETE, END OF STRANDS SHALL BE COATED WITH NON-BITUMINOUS JOINT SEALER. FOR GIRDER ENDS THAT ARE FINALLY EXPOSED, COAT THE GIRDER ENDS, EXPOSED STRAND ENDS AND ALL NON-BONDING SURFACES WITHIN 2 FEET OF THE GIRDER ENDS WITH A NON-PIGMENTED EPOXY CONFORMING TO AASHTO M-235 TYPE III, GRADE 2, CLASS B OR C. THE EPOXY SHALL BE APPLIED AT LEAST 3 DAYS AFTER MOIST CURING HAS CEASED AND PRIOR TO THE APPLICATION OF THE SEALER.

ALL GIRDERS SHALL BE CAST FULL LENGTH AS SHOWN.

SPACING SHOWN FOR #4 STIRRUPS IS FOR GRADE 60 REINFORCEMENT.

AN EQUIVALENT OF WELDED WIRE FABRIC (WWF) ASTM A1064 MAY BE SUBSTITUTED FOR THE STIRRUP REINFORCEMENT SHOWN, UPON APPROVAL OF THE STRUCTURES DESIGN SECTION. IF USED, WWF SUBSTITUTION DETAILS SHALL BE SUBMITTED ELECTRONICALLY TO THE WISDOT FABRICATION LIBRARY AND ACCEPTED PRIOR TO SHOP DRAWING SUBMITTAL.

PRESTRESSING STRANDS SHALL BE 0.6" DIA.-7-WIRE LOW-RELAXATION STRANDS WITH AN ULTIMATE STRENGTH OF 270,000 PSI.

DESIGNER NOTES

BID ITEM SHALL BE "PRESTRESSED GIRDER TYPE I 36W-INCH".

SPECIFY CONCRETE STRENGTH AS REQUIRED BY DESIGN FROM A MINIMUM OF 6,000 PSI TO A MAX. OF 8,000 PSI. MAXIMUM RELEASE STRENGTH IS 6800 PSI. USE 0.6" DIA. STRAND FOR ALL PATTERNS. THE MAX. NUMBER OF DRAPED 0.6" DIA. STRANDS IS 8.

REINFORCEMENT IN STANDARD END SECTION OF THE GIRDER IS BASED ON THE STANDARD STRAND PATTERNS LISTED ON STANDARD 19.12 AND THE SPAN LENGTHS SHOWN IN TABLE 19.3-1. USING DIFFERENT STRAND PATTERNS OR LONGER SPANS WILL REQUIRE A COMPLETE DESIGN OF THIS REINFORCEMENT, WHICH REQUIRES PRIOR APPROVAL FROM THE BUREAU OF STRUCTURES.

VARIES FOR ELASTOMERIC BRGS. (STD. 27.07) AND STEEL BRGS. (STD. 27.09)

DETAIL TYPICAL AT EACH END


THE DESIGN ENGINEER DETERMINES THIS VALUE BASED ON 2" MIN. HAUNCH AT EDGE OF GIRDER, X-SLOPE, PROFILE GRADE LINE AND CALCULATED RESIDUAL GIRDER CAMBER, INCLUDING THE CAMBER MULTIPLIER OF 1.4. THIS VALUE CAN VARY AND SHOULD BE GIVEN FOR EACH 1/3 OF THE GIRDER LENGTH. PROVIDE VALUES THAT MAINTAIN 3" MIN. DECK EMBEDMENT AND 2 1/2" CLEAR FROM TOP OF DECK WHILE ACCOUNTING FOR ± 3/4" VARIANCE IN ACTUAL CAMBER VERSUS THE CALCULATED RESIDUAL CAMBER.

PROVIDE STIRRUP SPACING THAT IS SYMMETRICAL ABOUT THE C/L OF GIRDER.


36W" PRESTRESSED GIRDER DETAILS

BUREAU OF STRUCTURES

APPROVED: *Laura Shadewald* DATE: 7-23

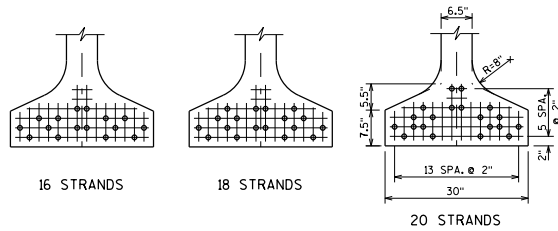

STANDARD ARRANGEMENTS TO RAISE CENTER OF GRAVITY
TO AVOID DRAPING OF 0.6" DIA. STRANDS

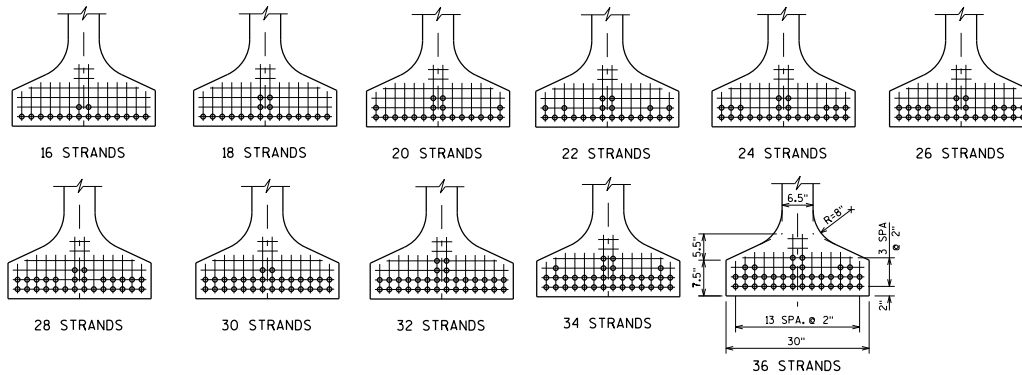

ARRANGEMENT AT $\frac{1}{4}$ SPAN - FOR GIRDERS WITH DRAPED 0.6" DIA. STRANDS

36W" GIRDER

A = 632 SQ. IN.
 $r^2 = 158.20 \text{ IN.}^2$
 $y_T = 19.37 \text{ IN.}$
 $y_B = -16.63 \text{ IN.}$
 $I = 99,980 \text{ IN.}^4$
 $S_T = 5,162 \text{ IN.}^3$
 $S_B = -6,012 \text{ IN.}^3$
 WT. = 658 #/FT.

PRE-TENSION

$f'_s = 270,000 \text{ P.S.I.}$
 $f_s = 0.75 \times 270,000 = 202,500 \text{ P.S.I.}$
 for low relaxation strands

Pi PER 0.6" DIA. STRAND = $0.217 \times 202,500 = 43.94 \text{ KIPS}$

$$\frac{y_B}{r^2} = \frac{-16.63}{158.20} = -0.10512 \text{ in/in}^2$$


$$f_B (\text{ini.}) = \frac{A_s f_s}{A} \left(1 + \frac{e_s y_B}{r^2} \right)$$

(COMPRESSION IS POSITIVE)			
NO. STRANDS	e_s (inches)	$P(\text{ini.}) = A_s f_s$ (KIPS)	$f_B (\text{ini.})$ (K/sq.in.)
STANDARD STRAND PATTERNS FOR UNDRAPED STRANDS			
16	-12.13	703	2.531
18	-11.74	791	2.796
20	-11.03	879	3.003
STANDARD STRAND PATTERNS FOR DRAPED STRANDS			
16	-14.38	703	2.794
18	-13.96	791	3.088
20	-13.83	879	3.413
22	-13.72	967	3.737
24	-13.63	1055	4.061
26	-13.55	1143	4.385
28	-13.49	1230	4.706
30	-13.43	1318	5.030
32	-13.13	1406	5.295
34	-12.98	1494	5.589
36	-12.85	1582	5.885


DESIGNER NOTES

ON THE STRAND PATTERN SHEET, PLACE A BOX AROUND EACH STRAND PATTERN THAT APPLIES TO THE DESIGNED STRUCTURE AND LABEL THE SPAN IT IS USED IN.

36W" PRESTRESSED GIRDER DESIGN DATA	
	BUREAU OF STRUCTURES
APPROVED: <i>Laura Shadewald</i>	DATE: 7-17

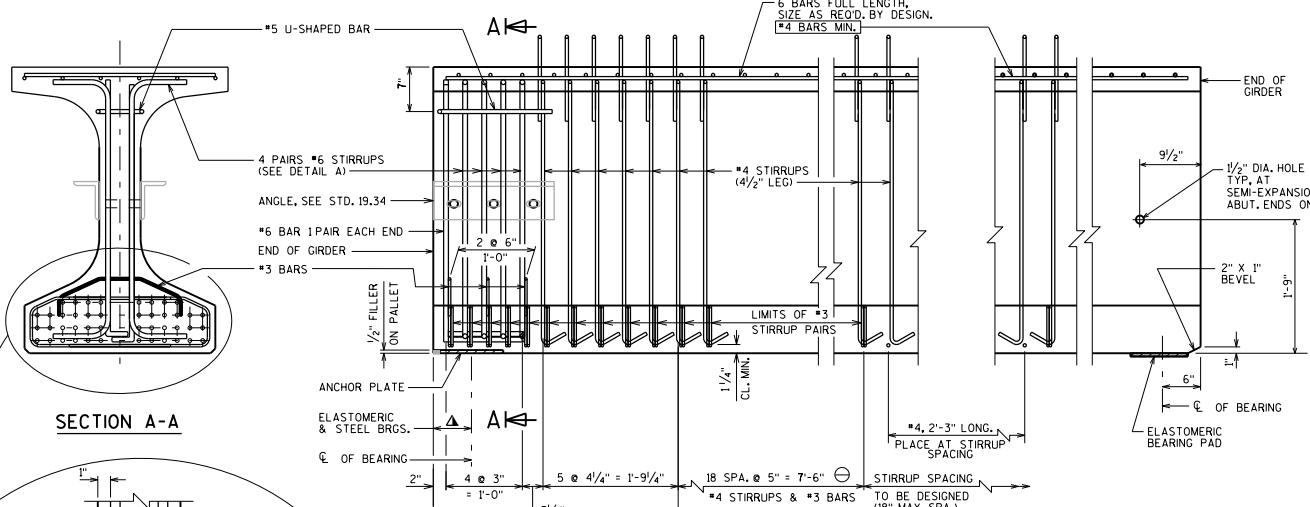


SECTION A-A

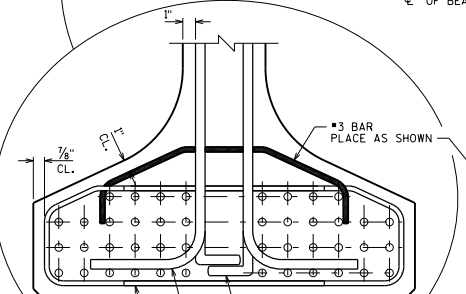


SUPPORT WITH STEEL OR ELASTOMERIC BRGS.




SUPPORT WITH 1/2" ELASTOMERIC BEARING PAD

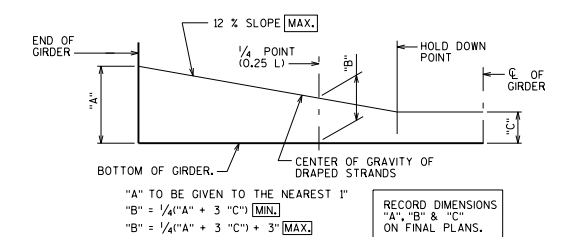

LOCATION OF DRAPED STRANDS

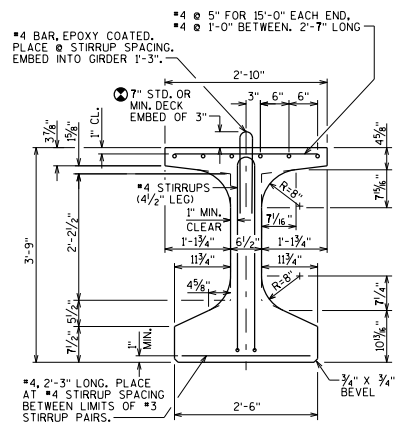

SECTION THRU GIRDER
STRANDS NOT SHOWN

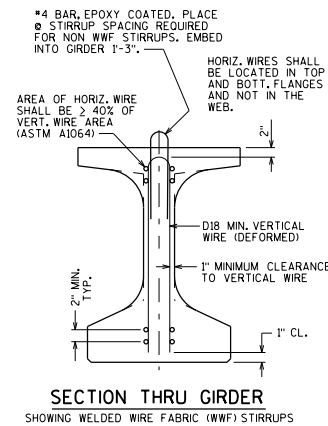

SECTION THRU GIRDER
SHOWING WELDED WIRE FABRIC (WWF) STIRRUPS
ASTM A1064 (FY = 70 KSI)


NOTES

- TOP OF GIRDER TO BE ROUGH FLOATED AND BROOMED TRANSVERSELY. EXCEPT THE OUTSIDE 8" OF GIRDER, WHICH SHALL RECEIVE A SMOOTH FINISH. AN APPROVED CONCRETE SEALER SHALL BE APPLIED TO ALL SMOOTH SURFACES INCLUDING THE OUTSIDE 8" OF THE TOP FLANGE.
- DO NOT APPLY CONCRETE SEALER OR EPOXY TO SURFACES RECEIVING APPLICATION OF CONCRETE STAINING.
- THE GIRDERS SHALL BE PROVIDED WITH A SUITABLE LIFTING DEVICE FOR HANDLING AND ERECTING THE GIRDERS. SEE SECTION 503.3.4 OF STANDARD SPECIFICATIONS FOR GUIDANCE.
- STRANDS SHALL BE FLUSH WITH END OF GIRDER. FOR GIRDER ENDS EMBEDDED COMPLETELY IN CONCRETE, END OF STRANDS SHALL BE COATED WITH NON-BITUMINOUS JOINT SEALER. FOR GIRDER ENDS THAT ARE FINALLY EXPOSED, COAT THE GIRDER ENDS, EXPOSED STRAND ENDS AND ALL NON-BONDING SURFACES WITHIN 2 FEET OF THE GIRDER ENDS WITH A NON-PIGMENTED EPOXY CONFORMING TO AASHTO M-235 TYPE II, GRADE 2, CLASS B OR C. THE EPOXY SHALL BE APPLIED AT LEAST 3 DAYS AFTER MOIST CURING HAS CEASED AND PRIOR TO THE APPLICATION OF THE SEALER.
- ALL GIRDERS SHALL BE CAST FULL LENGTH AS SHOWN.
- SPACING SHOWN FOR #4 STIRRUPS IS FOR GRADE 60 REINFORCEMENT.
- AN EQUIVALENT OF WELDED WIRE FABRIC (WWF) ASTM A1064 MAY BE SUBSTITUTED FOR THE STIRRUP REINFORCEMENT SHOWN, UPON APPROVAL OF THE STRUCTURES DESIGN SECTION. IF USED, WWF SUBSTITUTION DETAILS SHALL BE SUBMITTED ELECTRONICALLY TO THE WISDOT FABRICATION LIBRARY AND ACCEPTED PRIOR TO SHOP DRAWING SUBMITTAL.
- PRESTRESSING STRANDS SHALL BE 0.6" DIA.-7-WIRE LOW-RELAXATION STRANDS WITH AN ULTIMATE STRENGTH OF 270,000 PSI.

DESIGNER NOTES

- BID ITEM SHALL BE "PRESTRESSED GIRDER TYPE I 45W-INCH".
- SPECIFY CONCRETE STRENGTH AS REQUIRED BY DESIGN FROM A MINIMUM OF 6,000 PSI TO A MAX. OF 8,000 PSI. MAXIMUM RELEASE STRENGTH IS 6800 PSI. USE 0.6" DIA. STRAND FOR ALL PATTERNS. THE MAX. NUMBER OF DRAPED 0.6" DIA. STRANDS IS 8.
- REINFORCEMENT IN STANDARD END SECTION OF THE GIRDER IS BASED ON THE STANDARD STRAND PATTERNS LISTED ON STANDARD 19.14 AND THE SPAN LENGTHS SHOWN IN TABLE 19.3-1. USING DIFFERENT STRAND PATTERNS OR LONGER SPANS WILL REQUIRE A COMPLETE DESIGN OF THIS REINFORCEMENT, WHICH REQUIRES PRIOR APPROVAL FROM THE BUREAU OF STRUCTURES.
- VARIES FOR ELASTOMERIC BRGS. (STD. 27.07) AND STEEL BRGS. (STD. 27.09)
- DETAIL TYPICAL AT EACH END
- THE DESIGN ENGINEER DETERMINES THIS VALUE BASED ON 2" MIN. HAUNCH AT EDGE OF GIRDER, X-SLOPE, PROFILE GRADE LINE AND CALCULATED RESIDUAL GIRDER CAMBER, INCLUDING THE CAMBER MULTIPLIER OF 1.4. THIS VALUE CAN VARY AND SHOULD BE GIVEN FOR EACH 1/3 OF THE GIRDER LENGTH. PROVIDE VALUES THAT MAINTAIN 3" MIN. DECK EMBEDMENT AND 2 1/2" CLEAR FROM TOP OF DECK WHILE ACCOUNTING FOR VARIANCE IN ACTUAL CAMBER VERSUS THE CALCULATED RESIDUAL CAMBER.


PROVIDE STIRRUP SPACING THAT IS SYMMETRICAL ABOUT THE C/L OF GIRDER.

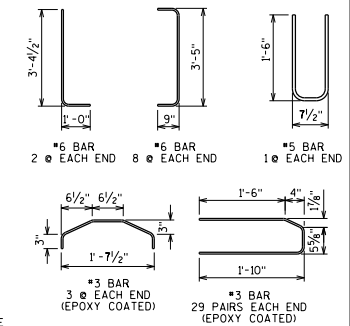

45W" PRESTRESSED GIRDER DETAILS

BUREAU OF STRUCTURES

APPROVED: *Laura Shadewald* DATE: 7-23

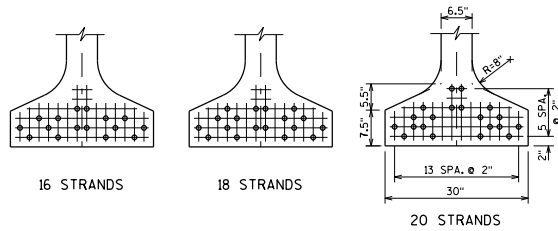

STANDARD ARRANGEMENTS TO RAISE CENTER OF GRAVITY TO AVOID DRAPING OF 0.6" DIA. STRANDS

45W" GIRDER

A = 692 SQ. IN.
 $r^2 = 258.70$ IN.²
 $y_T = 24.26$ IN.
 $y_B = -20.74$ IN.
 $I = 178,971$ IN.⁴
 $S_T = 7,377$ IN.³
 $S_B = -8,629$ IN.³
 WT. = 721 #/FT.


PRE-TENSION

$f'_s = 270,000$ P.S.I.
 $f_s = 0.75 \times 270,000 = 202,500$ P.S.I.
 for low relaxation strands

Pi PER 0.6" DIA. STRAND = $0.217 \times 202,500 = 43.94$ KIPS

$$\frac{y_B}{r^2} = \frac{-20.74}{258.70} = -0.08017 \text{ in/in}^2$$

$$f_B (\text{ini.}) = \frac{A_s f_s}{A} (1 + \frac{e_s y_B}{r^2})$$

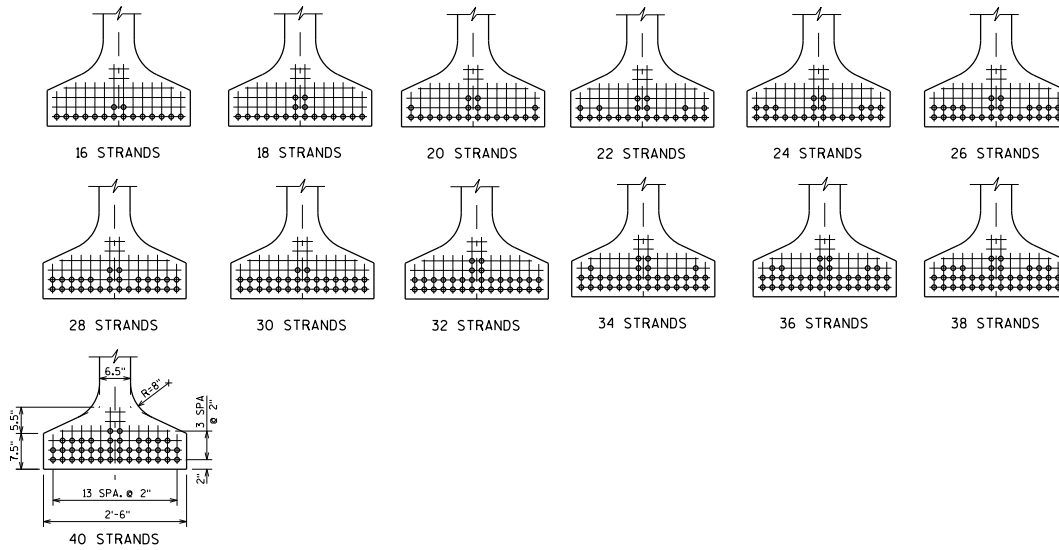

ARRANGEMENT AT $\frac{1}{4}$ SPAN - FOR GIRDERS WITH DRAPED 0.6" DIA. STRANDS

(COMPRESSION IS POSITIVE)			
NO. STRANDS	e_s (inches)	$P(\text{ini.}) = A_s f_s$ (KIPS)	$f_B (\text{ini.})$ (K/sq.in.)
STANDARD STRAND PATTERNS FOR UNDRAPED STRANDS			
16	-16.24	703	2.339
18	-15.85	791	2.596
20	-15.14	879	2.812
STANDARD STRAND PATTERNS FOR DRAPED STRANDS			
16	-18.49	703	2.521
18	-18.07	791	2.799
20	-17.94	879	3.097
22	-17.83	967	3.394
24	-17.74	1055	3.693
26	-17.66	1143	3.991
28	-17.60	1230	4.285
30	-17.54	1318	4.583
32	-17.24	1406	4.840
34	-17.09	1494	5.117
36	-16.96	1582	5.395
38	-16.85	1670	5.674
40	-16.74	1758	5.950

DESIGNER NOTES

ON THE STRAND PATTERN SHEET, PLACE A BOX AROUND EACH STRAND PATTERN THAT APPLIES TO THE DESIGNED STRUCTURE AND LABEL THE SPAN IT IS USED IN.

45W" PRESTRESSED GIRDER DESIGN DATA

BUREAU OF STRUCTURES

APPROVED: *Laura Shadewald*

DATE: 7-17

NOTES

TOP OF GIRDER TO BE ROUGH FLOATED AND BROOMED TRANSVERSELY. EXCEPT THE OUTSIDE 15" OF GIRDER WHICH SHALL RECEIVE A SMOOTH FINISH AN APPROVED CONCRETE SEALER SHALL BE APPLIED TO ALL SMOOTH SURFACES INCLUDING THE OUTSIDE 15" OF THE TOP FLANGE. DO NOT APPLY CONCRETE SEALER OR EPOXY TO SURFACES RECEIVING APPLICATION OF CONCRETE STAINING.

THE GIRDERS SHALL BE PROVIDED WITH A SUITABLE LIFTING DEVICE FOR HANDLING AND ERECTING THE GIRDERS. SEE SECTION 503.3.4 OF STANDARD SPECIFICATIONS FOR GUIDANCE.

STRANDS SHALL BE FLUSH WITH END OF GIRDER. FOR GIRDER ENDS EMBEDDED COMPLETELY IN CONCRETE, END OF STRANDS SHALL BE COATED WITH NON-BITUMINOUS JOINT SEALER. FOR GIRDER ENDS THAT ARE FINALLY EXPOSED, COAT THE GIRDER ENDS, EXPOSED STRAND ENDS AND ALL NON-BONDING SURFACES WITHIN 2 FEET OF THE GIRDER ENDS WITH A NON-PIGMENTED EPOXY CONFORMING TO AASHTO M-235 TYPE II, GRADE 2, CLASS B OR C. THE EPOXY SHALL BE APPLIED AT LEAST 3 DAYS AFTER MOIST CURING HAS CEASED AND PRIOR TO THE APPLICATION OF THE SEALER.

ALL GIRDERS SHALL BE CAST FULL LENGTH AS SHOWN. SPACING SHOWN FOR #4 STIRRUPS IS FOR GRADE 60 REINFORCEMENT.

AN EQUIVALENT OF WELDED WIRE FABRIC (WWF) ASTM A1064 MAY BE SUBSTITUTED FOR THE STIRRUP REINFORCEMENT SHOWN, UPON APPROVAL OF THE STRUCTURES DESIGN SECTION. IF USED, WWF SUBSTITUTION DETAILS SHALL BE SUBMITTED ELECTRONICALLY TO THE WISDOT FABRICATION LIBRARY AND ACCEPTED PRIOR TO SHOP DRAWING SUBMITTAL.

PRESTRESSING STRANDS SHALL BE 0.6" DIA.-7-WIRE LOW-RELAXATION STRANDS WITH AN ULTIMATE STRENGTH OF 270,000 PSI.

DESIGNER NOTES

BID ITEM SHALL BE "PRESTRESSED GIRDER TYPE 1 54W-INCH".

SPECIFY CONCRETE STRENGTH AS REQUIRED BY DESIGN FROM A MINIMUM OF 6,000 PSI TO A MAX. OF 8,000 PSI. MAXIMUM RELEASE STRENGTH IS 6800 PSI. USE 0.6" DIA. STRAND FOR ALL PATTERNS. THE MAX. NUMBER OF DRAPED 0.6" DIA. STRANDS IS 8.


REINFORCEMENT IN STANDARD END SECTION OF THE GIRDER IS BASED ON THE STANDARD STRAND PATTERNS LISTED ON STANDARD 19.16 AND THE SPAN LENGTHS SHOWN IN TABLE 19.3-1. USING DIFFERENT STRAND PATTERNS OR LONGER SPANS WILL REQUIRE A COMPLETE DESIGN OF THIS REINFORCEMENT, WHICH REQUIRES PRIOR APPROVAL FROM THE BUREAU OF STRUCTURES.

▲ VARIES FOR ELASTOMERIC BRGS. (STD. 27.07) AND STEEL BRGS. (STD. 27.09)

○ DETAIL TYPICAL AT EACH END

● THE DESIGN ENGINEER DETERMINES THIS VALUE BASED ON 2" MIN. HAUNCH AT EDGE OF GIRDER, X-SLOPE, PROFILE GRADE LINE AND CALCULATED RESIDUAL GIRDER CAMBER, INCLUDING THE CAMBER MULTIPLIER OF 1.4. THIS VALUE CAN VARY AND SHOULD BE GIVEN FOR EACH 1/3 OF THE GIRDER LENGTH. PROVIDE VALUES THAT MAINTAIN 3" MIN. DECK EMBEDMENT AND 2 1/2" CLEAR FROM TOP OF DECK WHILE ACCOUNTING FOR ± 3/4" VARIANCE IN ACTUAL CAMBER VERSUS THE CALCULATED RESIDUAL CAMBER.

PROVIDE STIRRUP SPACING THAT IS SYMMETRICAL ABOUT THE C/L OF GIRDER.



54W" PRESTRESSED GIRDER DETAILS



BUREAU OF STRUCTURES

APPROVED: *Laura Shadewald*


DATE: 7-23

SECTION THRU GIRDER

SHOWING WELDED WIRE FABRIC (WWF) STIRRUPS
ASTM A1064 (FY = TO KSI)

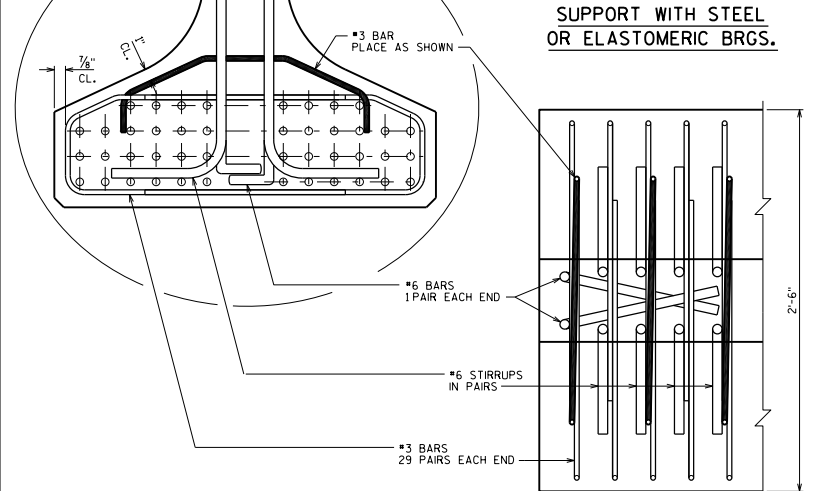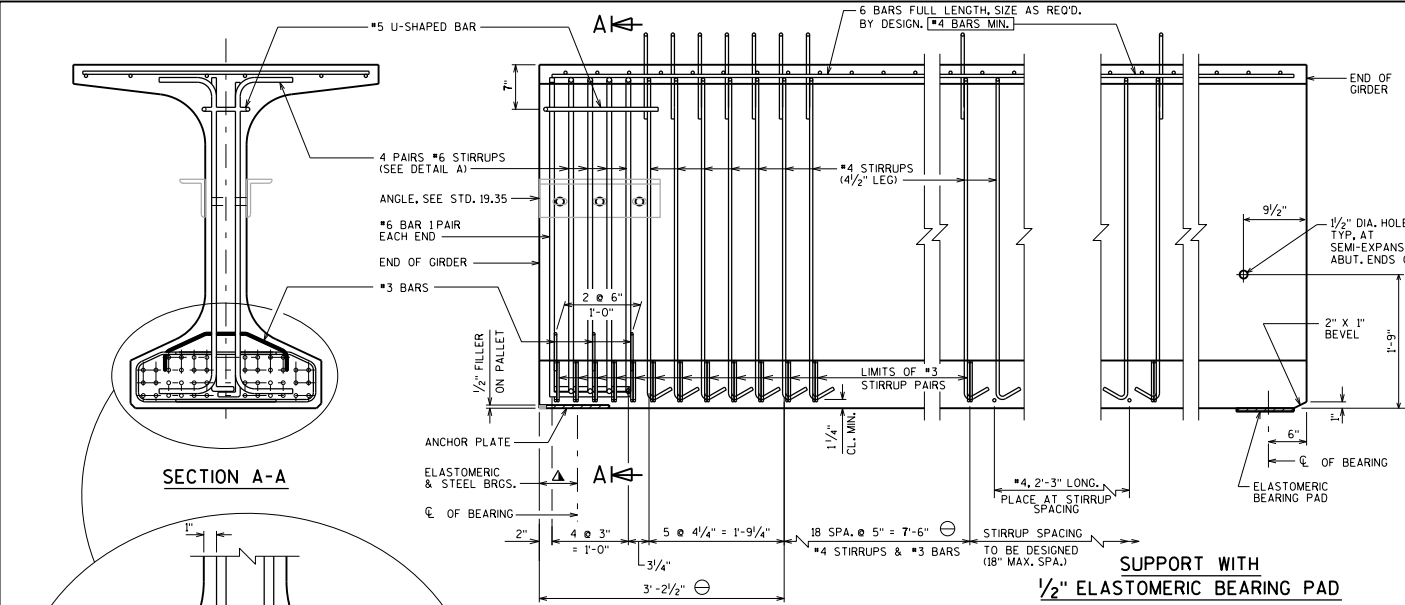

LOCATION OF DRAPED STRANDS

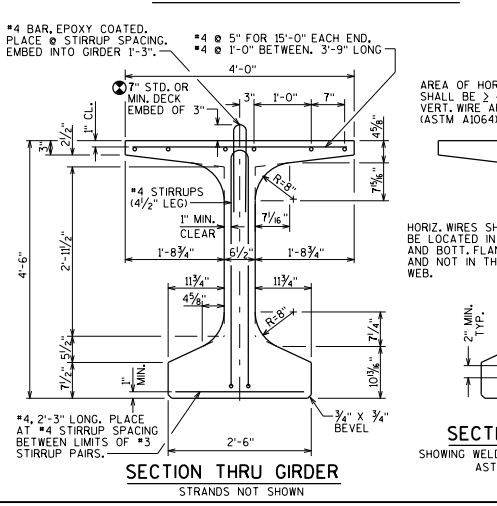

SECTION THRU GIRDER
STRANDS NOT SHOWN

54W" GIRDER

A = 798 SQ. IN.
 $r^2 = 402.41 \text{ IN.}^2$
 $y_T = 27.70 \text{ IN.}$
 $y_B = -26.30 \text{ IN.}$
 $I = 321,049 \text{ IN.}^4$
 $S_T = 11,592 \text{ IN.}^3$
 $S_B = -12,205 \text{ IN.}^3$
 WT. = 831 #/FT.


PRE-TENSION

$f'_s = 270,000 \text{ P.S.I.}$
 $f_s = 0.75 \times 270,000 = 202,500 \text{ P.S.I.}$
 for low relaxation strands


Pi PER 0.6" DIA. STRAND = $0.217 \times 202,500 = 43.94 \text{ KIPS}$

$\frac{y_B}{r^2} = \frac{-26.30}{402.41} = -0.06536 \text{ in/in}^2$

$f_B (\text{ini.}) = \frac{A_s f'_s}{A} (1 + \frac{e_s y_B}{r^2})$

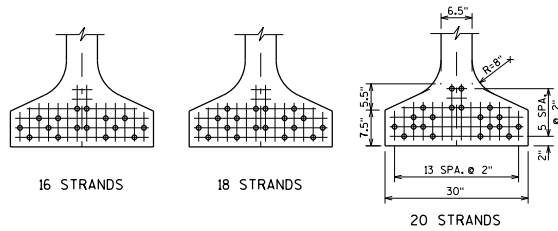

STANDARD ARRANGEMENTS TO RAISE CENTER OF GRAVITY TO AVOID DRAPING OF 0.6" DIA. STRANDS

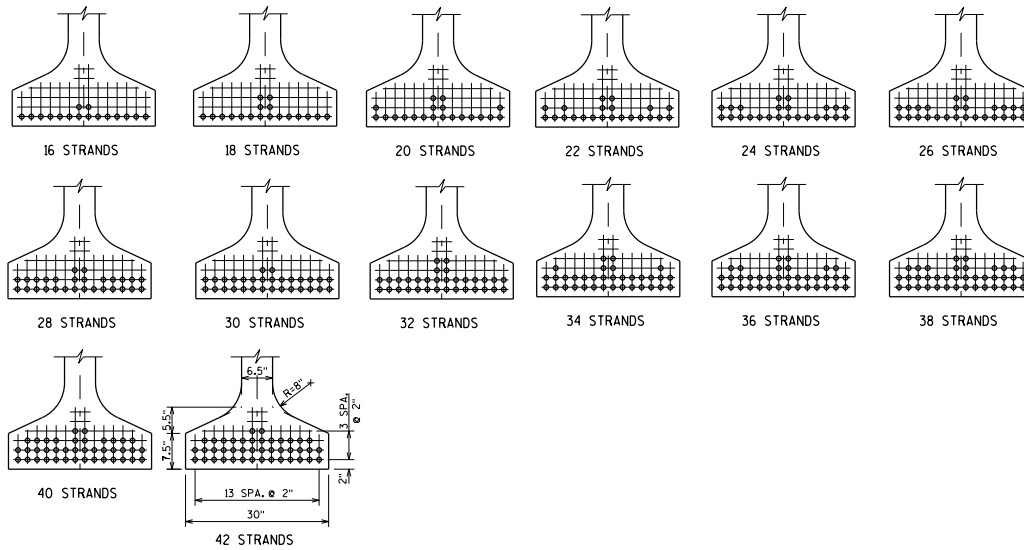

ARRANGEMENT AT $\frac{1}{4}$ SPAN - FOR GIRDERS WITH DRAPED 0.6" DIA. STRANDS

DESIGNER NOTES


ON THE STRAND PATTERN SHEET, PLACE A BOX AROUND EACH STRAND PATTERN THAT APPLIES TO THE DESIGNED STRUCTURE AND LABEL THE SPAN IT IS USED IN.

NO. STRANDS	e_s (inches)	P(ini.) = $A_s f'_s$ (KIPS)	(COMPRESSION IS POSITIVE)	
			f_B (ini.) (K/sq.in.)	
STANDARD STRAND PATTERNS FOR UNDRAPED STRANDS				
16	-21.80	703	2.136	
18	-21.41	791	2.378	
20	-20.70	879	2.592	
STANDARD STRAND PATTERNS FOR DRAPED STRANDS				
16	-24.05	703	2.266	
18	-23.63	791	2.522	
20	-23.50	879	2.793	
22	-23.39	967	3.065	
24	-23.30	1055	3.336	
26	-23.22	1143	3.607	
28	-23.16	1230	3.875	
30	-23.10	1318	4.146	
32	-22.80	1406	4.387	
34	-22.65	1494	4.643	
36	-22.52	1582	4.901	
38	-22.41	1670	5.159	
40	-22.30	1758	5.413	
42	-22.20	1846	5.670	


54W" PRESTRESSED GIRDER DESIGN DATA




APPROVED: *Laura Shadewald* DATE: 7-17

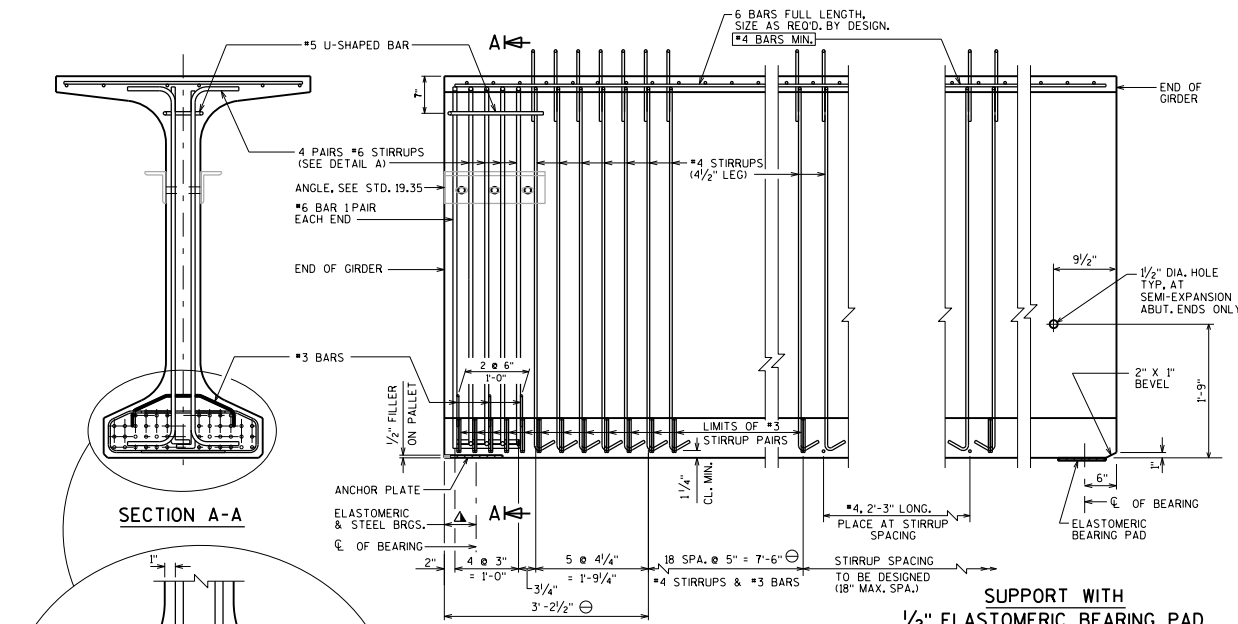



SECTION A-A

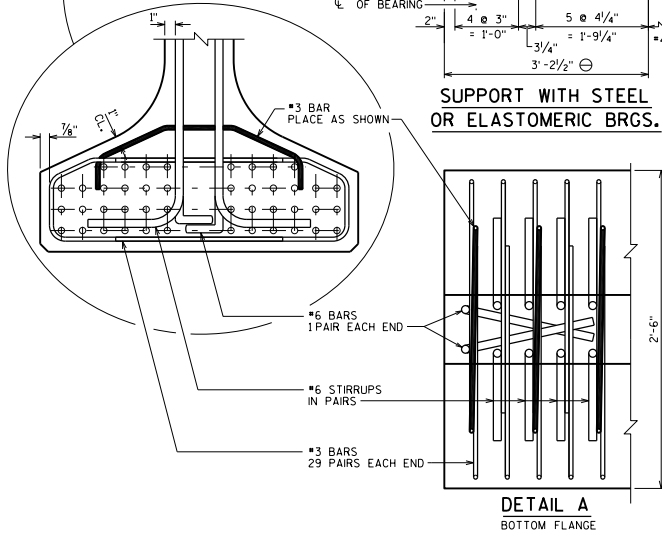


SUPPORT WITH STEEL OR ELASTOMERIC BRGS.

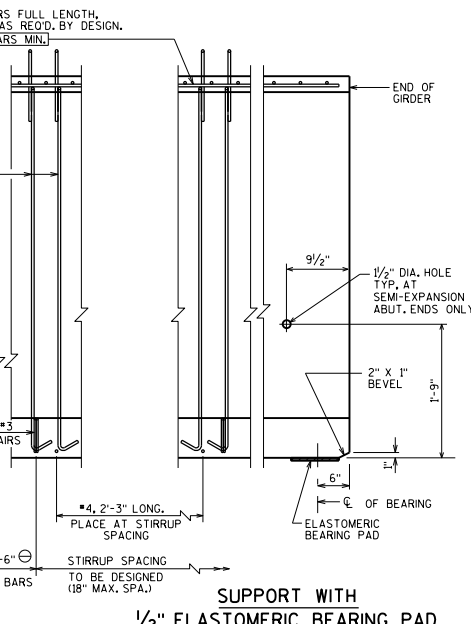


SUPPORT WITH 1/2" ELASTOMERIC BEARING PAD

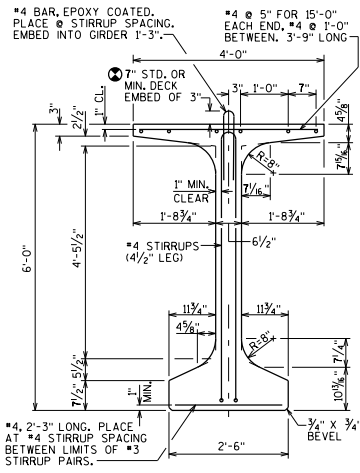

SECTION THRU GIRDER STRANDS NOT SHOWN

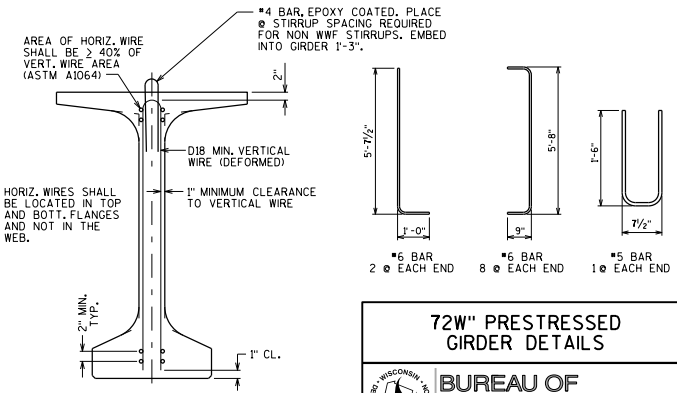

SECTION THRU GIRDER SHOWING WELDED WIRE FABRIC (WWF) STIRRUPS ASTM A1064 (FY = 70 KSI)

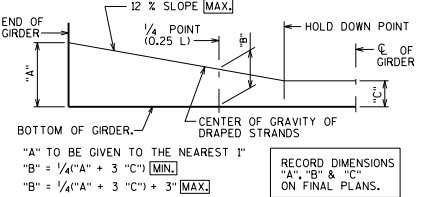

LOCATION OF DRAPED STRANDS

NOTES

TOP OF GIRDER TO BE ROUGH FLOATED AND BROOMED TRANSVERSELY, EXCEPT THE OUTSIDE 15" OF GIRDER, WHICH SHALL RECEIVE A SMOOTH FINISH. AN APPROVED CONCRETE SEALER SHALL BE APPLIED TO ALL SMOOTH SURFACES INCLUDING THE OUTSIDE 15" OF THE TOP FLANGE.

DO NOT APPLY CONCRETE SEALER OR EPOXY TO SURFACES RECEIVING APPLICATION OF CONCRETE STAINING.

THE GIRDERS SHALL BE PROVIDED WITH A SUITABLE LIFTING DEVICE FOR HANDLING AND ERECTING THE GIRDERS.

STRANDS SHALL BE FLUSH WITH END OF GIRDER, FOR GIRDER ENDS EMBEDDED COMPLETELY IN CONCRETE, END OF STRANDS SHALL BE COATED WITH NON-BITUMINOUS JOINT SEALER. FOR GIRDER ENDS THAT ARE FINALLY EXPOSED, COAT THE GIRDER ENDS, EXPOSED STRAND ENDS AND ALL NON-BONDING SURFACES WITHIN 2 FEET OF THE GIRDER ENDS WITH A NON-PIGMENTED EPOXY CONFORMING TO AASHTO M-235 TYPE III, GRADE 2, CLASS B OR C. THE EPOXY SHALL BE APPLIED AT LEAST 3 DAYS AFTER MOIST CURING HAS CEASED AND PRIOR TO THE APPLICATION OF THE SEALER.

ALL GIRDERS SHALL BE CAST FULL LENGTH AS SHOWN.

SPACING SHOWN FOR #4 STIRRUPS IS FOR GRADE 60 REINFORCEMENT.

AN EQUIVALENT OF WELDED WIRE FABRIC (WWF) ASTM A1064 MAY BE SUBSTITUTED FOR THE STIRRUP REINFORCEMENT SHOWN, UPON APPROVAL OF THE STRUCTURES DESIGN SECTION. IF USED, WWF SUBSTITUTION DETAILS SHALL BE SUBMITTED ELECTRONICALLY TO THE WISDOT FABRICATION LIBRARY AND ACCEPTED PRIOR TO SHOP DRAWING SUBMITTAL.

PRESTRESSING STRANDS SHALL BE 0.6" DIA.-7-WIRE LOW-RELAXATION STRANDS WITH AN ULTIMATE STRENGTH OF 270,000 PSI.

THIS NOTE APPLIES TO LONG SPANS AS DEFINED IN THE NOTES FOR THE 72" GIRDER, TABLE 19.3-2 OF THE BRIDGE MANUAL: FOR STORAGE, HANDLING, AND TRANSPORTING, THIS GIRDER IS REINFORCED TO ALLOW A MAXIMUM OVERHANG FROM THE LIFTING LOCATION OR POINT OF SUPPORT OF UP TO 1/10 THE GIRDER LENGTH. THE CONTRACTOR IS RESPONSIBLE FOR LATERAL STABILITY OF THE GIRDER UNTIL THE DECK IS CURED. (IF NOTE DOESN'T APPLY, REFERENCE SENT. 503.3.4 OF STD. SPEC. FOR GUIDANCE)

DESIGNER NOTES

BID ITEM SHALL BE "PRESTRESSED GIRDER TYPE I 72W-INCH".

SPECIFY CONCRETE STRENGTH AS REQUIRED BY DESIGN FROM A MINIMUM OF 6,000 PSI TO A MAX. OF 8,000 PSI. MAXIMUM RELEASE STRENGTH IS 6800 PSI. USE 0.6" DIA. STRAND FOR ALL PATTERNS. THE MAX. NUMBER OF DRAPED 0.6" DIA. STRANDS IS 8.

REINFORCEMENT IN STANDARD END SECTION OF THE GIRDER IS BASED ON THE STANDARD STRAND PATTERNS LISTED ON STANDARD 19.3B AND THE SPAN LENGTHS SHOWN IN TABLE 19.3-2. USING DIFFERENT STRAND PATTERNS OR LONGER SPANS WILL REQUIRE A COMPLETE DESIGN OF THIS REINFORCEMENT, WHICH REQUIRE PRIOR APPROVAL FROM THE BUREAU OF STRUCTURES.

VARIES FOR ELASTOMERIC BRGS. (STD. 27.07) AND STEEL BRGS (STD. 27.09)

DETAIL TYPICAL AT EACH END


THE DESIGN ENGINEER DETERMINES THIS VALUE BASED ON 2" MIN. HAUNCH AT EDGE OF GIRDER, X-SLOPE, PROFILE GRADE LINE AND CALCULATED RESIDUAL GIRDER CAMBER, INCLUDING THE CAMBER MULTIPLIER OF 1.4. THIS VALUE CAN VARY AND SHOULD BE GIVEN FOR EACH 1/3 OF THE GIRDER LENGTH. PROVIDE VALUES THAT MAINTAIN 3" MIN. DECK EMBEDMENT AND 2 1/2" CLEAR FROM TOP OF DECK WHILE ACCOUNTING FOR ± 3/4" VARIANCE IN ACTUAL CAMBER VERSUS THE CALCULATED RESIDUAL CAMBER.

PROVIDE STIRRUP SPACING THAT IS SYMMETRICAL ABOUT THE C/L OF GIRDER.


72" PRESTRESSED GIRDER DETAILS

BUREAU OF STRUCTURES

APPROVED: *Laura Shadewald* DATE: 7-23

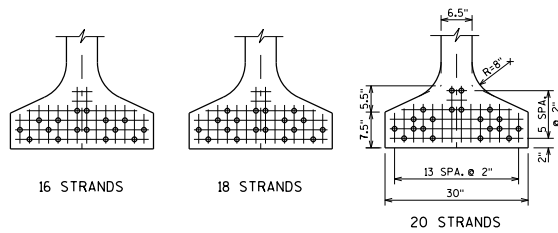

STANDARD ARRANGEMENTS TO RAISE CENTER OF GRAVITY TO AVOID DRAPING OF 0.6" DIA. STRANDS

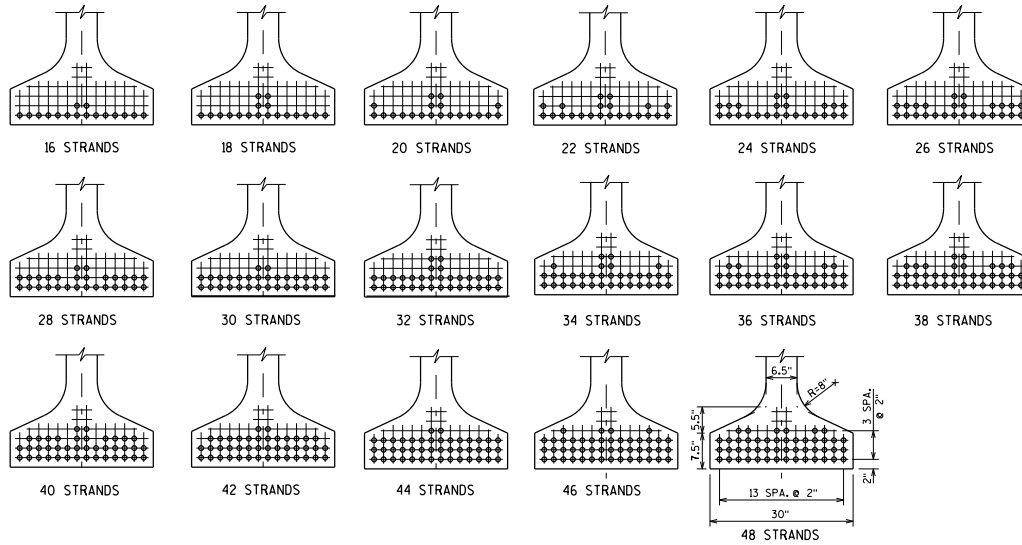

ARRANGEMENT AT $\frac{1}{4}$ SPAN - FOR GIRDERS WITH DRAPED 0.6" DIA. STRANDS

72W GIRDER

A = 915 SQ. IN.
 $r^2 = 717.5 \text{ IN.}^2$
 $y_T = 37.13 \text{ IN.}$
 $y_B = -34.87 \text{ IN.}$
 $I = 656,426 \text{ IN.}^4$
 $S_T = 17,680 \text{ IN.}^3$
 $S_B = -18,825 \text{ IN.}^3$
 WT. = 953 #/FT.

PRE-TENSION

$f'_s = 270,000 \text{ P.S.I.}$
 $f_s = 0.75 \times 270,000 = 202,500 \text{ P.S.I.}$
 for low relaxation strands

Pi PER 0.6" DIA. STRAND = $0.217 \times 202,500 = 43.94 \text{ KIPS}$

$$\frac{y_B}{r^2} = \frac{-34.87}{717.50} = -0.0486 \text{ in/in}^2$$

$$f_B (\text{init.}) = \frac{A_s f_s (1 + e_s y_B)}{A r^2}$$

(COMPRESSION IS POSITIVE)			
NO. STRANDS	e_s (inches)	$P(\text{init.}) = A_s f_s$ (KIPS)	$f_B (\text{init.})$ (K/sq.in.)
STANDARD STRAND PATTERNS FOR UNDRAPED STRANDS			
16	-30.37	703	1.902
18	-29.98	791	2.124
20	-29.27	879	2.328
STANDARD STRAND PATTERNS FOR DRAPED STRANDS			
16	-32.62	703	1.986
18	-32.20	791	2.217
20	-32.07	879	2.458
22	-31.96	967	2.698
24	-31.87	1055	2.939
26	-31.79	1143	3.179
28	-31.73	1230	3.417
30	-31.67	1318	3.657
32	-31.37	1406	3.880
34	-31.22	1494	4.110
36	-31.09	1582	4.341
38	-30.98	1670	4.574
40	-30.87	1758	4.803
42	-30.77	1846	5.034
44	-30.69	1933	5.265
46	-30.52	2021	5.484
48	-30.37	2109	5.707

DESIGNER NOTES


ON THE STRAND PATTERN SHEET, PLACE A BOX AROUND EACH STRAND PATTERN THAT APPLIES TO THE DESIGNED STRUCTURE AND LABEL THE SPAN IT IS USED IN.

72W" PRESTRESSED GIRDER DESIGN DATA


BUREAU OF
STRUCTURES

APPROVED: *Laura Shadewald*


DATE:
7-17

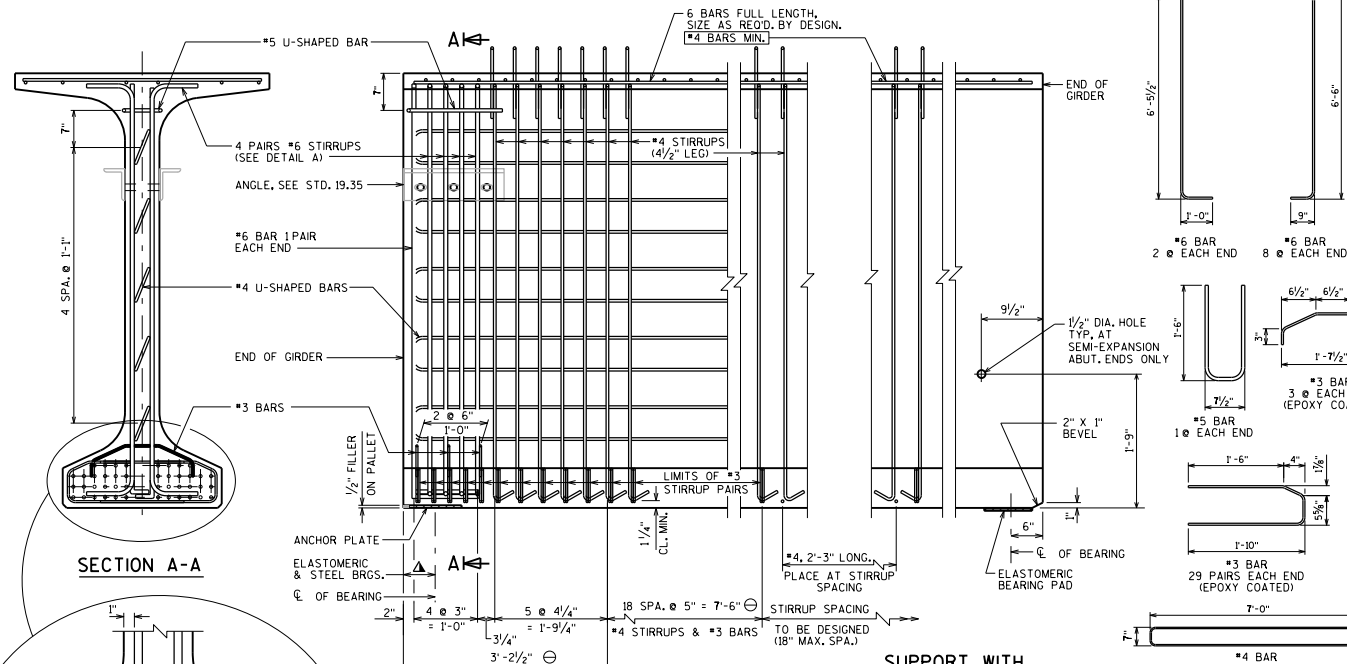


SECTION A-A

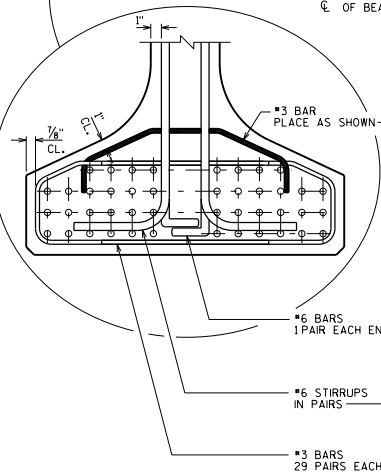


SUPPORT WITH STEEL OR ELASTOMERIC BRGS.




**DETAIL A
BOTTOM FLANGE**

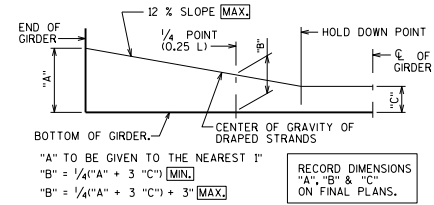

LOCATION OF DRAPED STRANDS

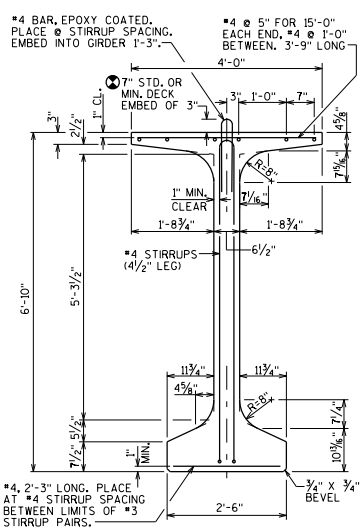

**SECTION THRU GIRDER
STRANDS NOT SHOWN**

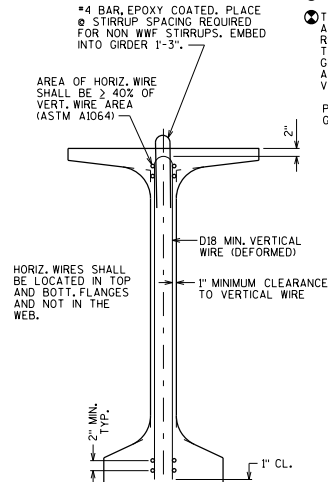

**SECTION THRU GIRDER
SHOWING WELDED WIRE FABRIC (WWF) STIRRUPS
ASTM A1064 (FY = 70 KSI)**

NOTES

TOP OF GIRDER TO BE ROUGH FLOATED AND BROOMED TRANSVERSELY, EXCEPT THE OUTSIDE 15" OF GIRDER, WHICH SHALL RECEIVE A SMOOTH FINISH. AN APPROVED CONCRETE SEALER SHALL BE APPLIED TO ALL SMOOTH SURFACES INCLUDING THE OUTSIDE 15" OF THE TOP FLANGE.

DO NOT APPLY CONCRETE SEALER OR EPOXY TO SURFACES RECEIVING APPLICATION OF CONCRETE STAINING.

THE GIRDERS SHALL BE PROVIDED WITH A SUITABLE LIFTING DEVICE FOR HANDLING AND ERECTING THE GIRDERS.

STRANDS SHALL BE FLUSH WITH END OF GIRDER. FOR GIRDER ENDS EMBEDDED COMPLETELY IN CONCRETE, END OF STRANDS SHALL BE COATED WITH NON-BITUMINOUS JOINT SEALER. FOR GIRDER ENDS THAT ARE FINALLY EXPOSED, COAT THE GIRDER ENDS, EXPOSED STRAND ENDS AND ALL NON-FINISHED SURFACES WITHIN 2 FEET OF THE GIRDER ENDS WITH A NON-BONDING EPOXY CONFORMING TO AASHTO M-235 TYPE III, GRADE 2, CLASS B OR C. THE EPOXY SHALL BE APPLIED AT LEAST 3 DAYS AFTER MOIST CURING HAS CEASED AND PRIOR TO THE APPLICATION OF THE SEALER.

ALL GIRDERS SHALL BE CAST FULL LENGTH AS SHOWN.

SPACING SHOWN FOR #4 STIRRUPS IS FOR GRADE 60 REINFORCEMENT.

AN EQUIVALENT OF WELDED WIRE FABRIC (WWF) ASTM A1064 MAY BE SUBSTITUTED FOR THE STIRRUP REINFORCEMENT SHOWN UPON APPROVAL OF THE STRUCTURES DESIGN SECTION. IF USED, WWF SUBSTITUTION DETAILS SHALL BE SUBMITTED ELECTRONICALLY TO THE WISDOT FABRICATION LIBRARY AND ACCEPTED PRIOR TO SHOP DRAWING SUBMITTAL.

PRESTRESSING STRANDS SHALL BE 0.6" DIA.-7-WIRE LOW-RELAXATION STRANDS WITH AN ULTIMATE STRENGTH OF 270,000 PSI.

THIS NOTE APPLIES TO LONG SPANS AS DEFINED IN THE NOTES FOR THE 82W" GIRDER, TABLE 19.3-2 OF THE BRIDGE MANUAL: FOR STORAGE, HANDLING, AND TRANSPORTING, THIS GIRDER IS REINFORCED TO ALLOW A MAXIMUM OVERHANG FROM THE LIFTING LOCATION OR POINT OF SUPPORT UP TO 1/10 THE GIRDER LENGTH. THE CONTRACTOR IS RESPONSIBLE FOR LATERAL STABILITY OF THE GIRDER UNTIL THE DECK IS CURED. IF NOTE DOESN'T APPLY, REFERENCE SECT. 503.3.4 OF STD. SPEC. FOR GUIDANCE.

DESIGNER NOTES

BID ITEM SHALL BE "PRESTRESSED GIRDER TYPE I 82W-INCH".

SPECIFY CONCRETE STRENGTH AS REQUIRED BY DESIGN FROM A MINIMUM OF 6,000 PSI TO A MAX. OF 8,000 PSI. MAXIMUM RELEASE STRENGTH IS 6800 PSI. USE 0.6" DIA. STRAND FOR ALL PATTERNS. THE MAX. NUMBER OF DRAPED 0.6" DIA. STRANDS IS 8.

REINFORCEMENT IN STANDARD END SECTION OF THE GIRDER IS BASED ON THE STANDARD STANDARD PATTERNS LISTED ON STANDARD 19.20 AND THE SPAN LENGTHS SHOWN IN TABLE 19.3-2. USING DIFFERENT STRAND PATTERNS OR LONGER SPANS WILL REQUIRE A COMPLETE DESIGN OF THIS REINFORCEMENT, WHICH REQUIRES PRIOR APPROVAL FROM THE BUREAU OF STRUCTURES.

- ▲ VARIES FOR ELASTOMERIC BRGS. (STD. 27.07) AND STEEL BRGS (STD. 27.09)
- ⊖ DETAIL TYPICAL AT EACH END
- ⊙ THE DESIGN ENGINEER DETERMINES THIS VALUE BASED ON 2" MIN. HAUNCH AT EDGE OF GIRDER, X-SLOPE, PROFILE GRADE LINE AND CALCULATED RESIDUAL GIRDER CAMBER, INCLUDING THE CAMBER MULTIPLIER OF 1.4. THIS VALUE CAN VARY AND SHOULD BE GIVEN FOR EACH 1/3 OF THE GIRDER LENGTH. PROVIDE VALUES THAT MAINTAIN 3" MIN. DECK EMBEDMENT AND 2 1/2" CLEAR FROM TOP OF DECK WHILE ACCOUNTING FOR ± 1/4" VARIANCE IN ACTUAL CAMBER VERSUS THE CALCULATED RESIDUAL CAMBER.


PROVIDE STIRRUP SPACING THAT IS SYMMETRICAL ABOUT THE C/L OF GIRDER.

THERE IS CURRENTLY A MORATORIUM ON THE USE OF 82W" PRESTRESSED GIRDERS.


82W" PRESTRESSED GIRDER DETAILS

BUREAU OF STRUCTURES

APPROVED: Laura Shadewald DATE: 7-23

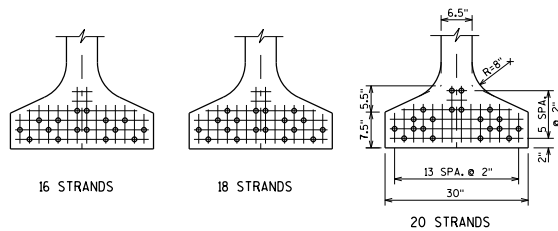

STANDARD ARRANGEMENTS TO RAISE CENTER OF GRAVITY TO AVOID DRAPING OF 0.6" DIA. STRANDS

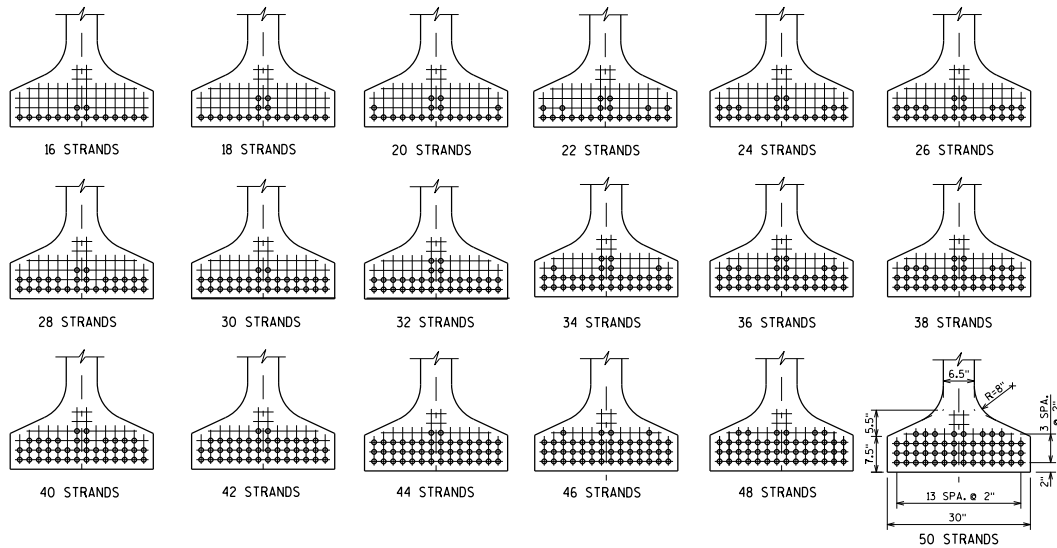

ARRANGEMENT AT $\frac{1}{4}$ SPAN - FOR GIRDERS WITH DRAPED 0.6" DIA. STRANDS

82W" GIRDER

A = 980 SQ. IN.
 $r^2 = 924.1 \text{ IN.}^2$
 $y_T = 42.32 \text{ IN.}$
 $y_B = -39.68 \text{ IN.}$
 $I = 905,453 \text{ IN.}^4$
 $S_T = 21,396 \text{ IN.}^3$
 $S_B = -22,819 \text{ IN.}^3$
 WT. = 1021 #/FT.

PRE-TENSION

$f'_s = 270,000 \text{ P.S.I.}$
 $f_s = 0.75 \times 270,000 = 202,500 \text{ P.S.I.}$
 for low relaxation strands

Pi PER 0.6" DIA. STRAND = $0.217 \times 202,500 = 43.94 \text{ KIPS}$

$$\frac{y_B}{r^2} = \frac{-39.68}{924.10} = -0.04294 \text{ in/in}^2$$

$$f_B (\text{init.}) = \frac{A_s f_s}{A} (1 + \frac{e_s y_B}{r^2})$$

(COMPRESSION IS POSITIVE)			
NO. STRANDS	e_s (inches)	$P(\text{init.}) = A_s f_s$ (KIPS)	$f_B (\text{init.})$ (K/sq.in.)
STANDARD STRAND PATTERNS FOR UNDRAPED STRANDS			
16	-35.18	703	1.801
18	-34.79	791	2.013
20	-34.08	879	2.209
STANDARD STRAND PATTERNS FOR DRAPED STRANDS			
16	-37.43	703	1.870
18	-37.01	791	2.090
20	-36.88	879	2.318
22	-36.77	967	2.545
24	-36.68	1055	2.772
26	-36.60	1143	3.000
28	-36.54	1230	3.224
30	-36.48	1318	3.451
32	-36.18	1406	3.664
34	-36.03	1494	3.883
36	-35.90	1582	4.104
38	-35.79	1670	4.323
40	-35.68	1758	4.542
42	-35.58	1846	4.762
44	-35.50	1933	4.978
46	-35.33	2021	5.191
48	-35.18	2109	5.404
50	-35.04	2197	5.616

DESIGNER NOTES

ON THE STRAND PATTERN SHEET, PLACE A BOX AROUND EACH STRAND PATTERN THAT APPLIES TO THE DESIGNED STRUCTURE AND LABEL THE SPAN IT IS USED IN.


THERE IS CURRENTLY A MORATORIUM ON THE USE OF 82W" PRESTRESSED GIRDERS.

82W" PRESTRESSED GIRDER DESIGN DATA


BUREAU OF
STRUCTURES

DATE: _____

APPROVED: *Laura Shadewald*

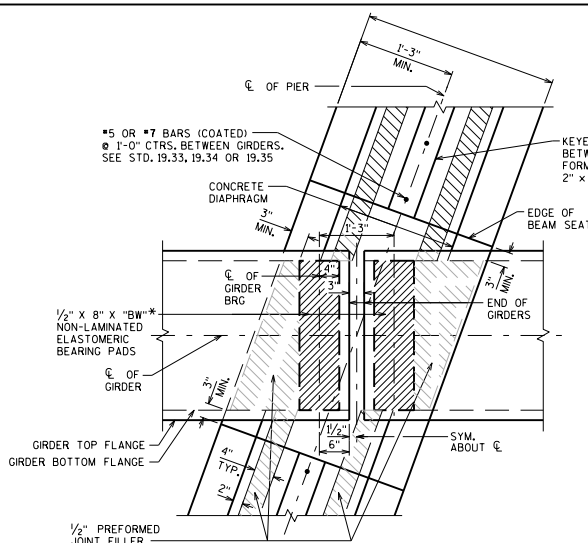


AT PIER

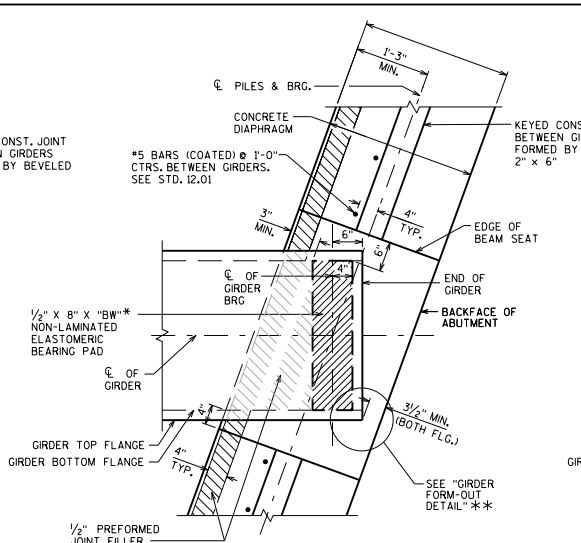

AT ABUTMENT


ABUTMENT: TYPE "A1 FIXED" AND "A5" W/O PAVING NOTCH

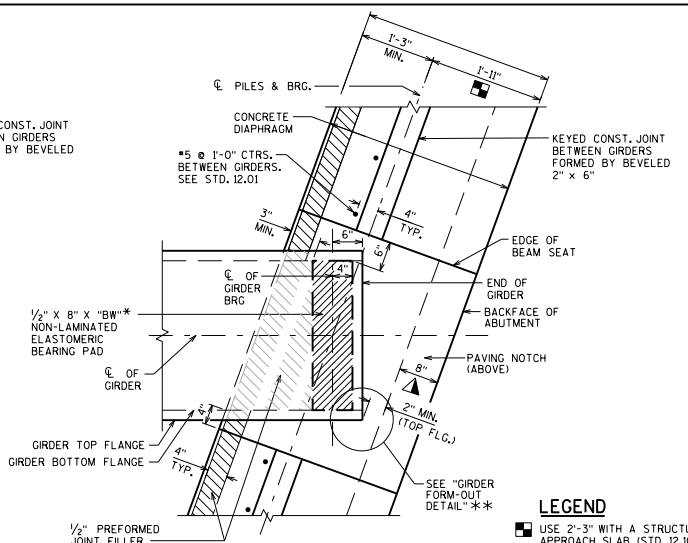

AT ABUTMENT


ABUTMENT: TYPE "A1 FIXED" AND "A5" WITH PAVING NOTCH.

- LEGEND**
- USE 2'-3" WITH A STRUCTURAL APPROACH SLAB (STD. 12.10)
 - ▲ PAVING NOTCH IS 1'-0" WIDE IF STRUCTURAL APPROACH SLAB (STD. 12.10) IS USED.
 - 1'-6" FOR 36W, 45W, 54", 54W, 70", 72W & 82W GIRDERS WITH SKEWS >25°.

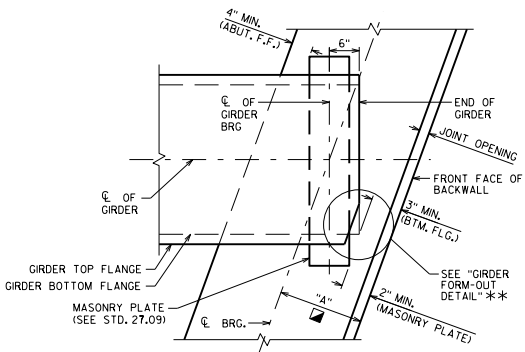


AT ABUTMENT WITH STEEL BRGS

ABUTMENT: TYPE "A3" SEE TABLE FOR MIN. "A" VALUES REQ'D. TO MEET MIN. CLEARANCE CRITERIA ABOVE.




GIRDER FORM-OUT DETAIL **

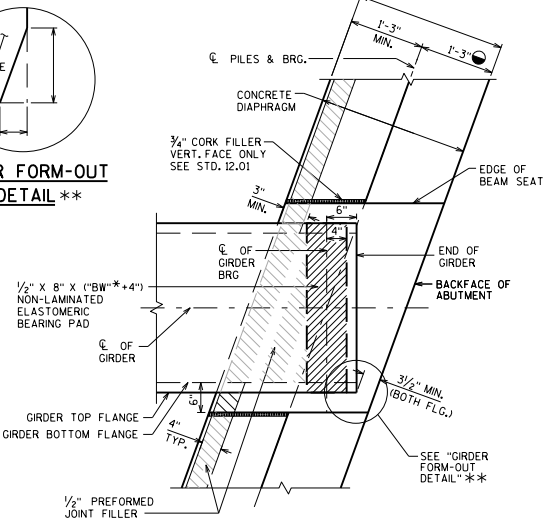

AT ABUTMENT

ABUTMENT: TYPE "A1 SEMI-EXP." W/O PAVING NOTCH

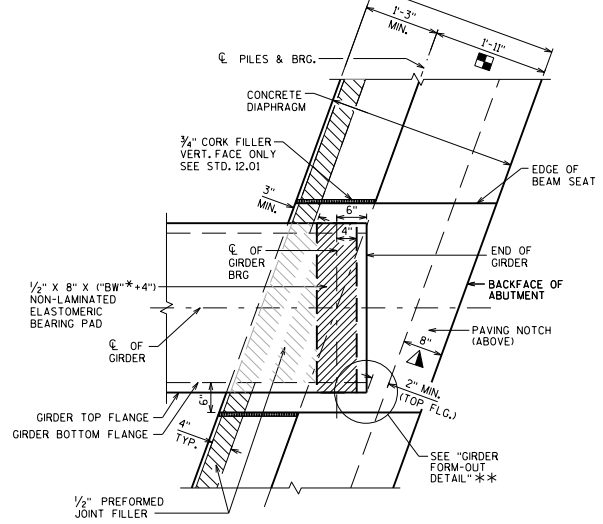

AT ABUTMENT

ABUTMENT: TYPE "A1 SEMI-EXP." WITH PAVING NOTCH.

MIN. "A" DIMENSION IN INCHES FOR A3 ABUTMENTS WITH STEEL BEARINGS AS SHOWN ON STD. 27.09.
 * "A" DIMENSION BASED ON BOTTOM FLANGE CLEARANCE IS CALCULATED USING 6" OFFSET FROM C. OF BRG. TO END OF GIRDER AND 3" MIN. OFFSET BETWEEN FLANGE AND BACKWALL TO ACCOMMODATE EXPANSION. IF CONDITIONS REQUIRE OFFSETS OTHER THAN THESE, THE "A" DIMENSION MUST BE CALCULATED. "A" DIMENSION BASED ON MASONRY PLATE CLEARANCE IS CALCULATED ASSUMING A 10" LONG PLATE. IF LONGER PLATE IS REQUIRED, RECALCULATE "A".

SKEW ANGLE (DEG.)	GIRDER DEPTHS									
	28"	36"	36W"	45"	45W"	54"	54W"	70"	72W"	82W"
0-5	12"	12"	12"	12"	12"	12"	12"	12"	12"	12"
> 5-15	12"	12"	13"	12"	13"	12.5"	13"	13"	13"	13"
> 15-25	12.5"	12.5"	15"	13"	15"	14"	15"	15"	15"	15"
> 25-35	(14")	(14")	(17.5")	(15")	(17.5")	(16.5")	(17.5")	16.5"	(17.5")	(17.5")
> 35-45	(15.5")	(15.5")	(20")	(17")	(20")	(18.5")	(20")	(18.5")	(20")	(20")
> 45-55	(17")	(17")	(21.5")	(18.5")	(21.5")	(20")	(21.5")	(20")	(21.5")	(21.5")

VALUES IN PARENTHESIS ARE CONTROLLED BY 2" CLR. CRITERIA AT EDGE OF MASONRY PLATE. VALUES MAY BE ADJUSTED IF MASONRY PLATE IS CLIPPED PER STANDARD 27.02.

PRESTRESSED GIRDER FLANGE WIDTH TABLE

GIRDER DEPTH	28"	36"	36W"	45"	45W"	54"	54W"	70"	72W"	82W"
TOP FLANGE WIDTH	18"	12"	34"	16"	34"	20"	48"	30"	48"	48"
BOTTOM FLANGE WIDTH "BW"*	18"	18"	30"	22"	30"	26"	30"	26"	30"	30"

DESIGNER NOTES



SEE PRESTRESSED GIRDER DETAILS FOR ADDITIONAL INFORMATION. BEARING PAD DETAILS FOR 45W GIRDER SHOWN ON THIS SHEET. DETAILS FOR OTHER GIRDERS TYPES SIMILAR.

**WHEN NEEDED, FORM-OUT TOP FLANGE ON 36W, 45W, 54W, 70", 72W" & 82W" PRESTRESSED GIRDERS TO MEET MIN. CLR. REQ'D (SEE STD. 19.34, 19.35 OR 28.03). BOTTOM FLANGE FORM-OUT NOT ALLOWED.

BEARING PAD DETAILS FOR PRESTRESSED CONCRETE GIRDERS

BUREAU OF STRUCTURES

APPROVED: *Laura Shadewald* DATE: 1-20

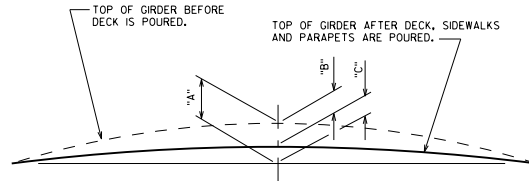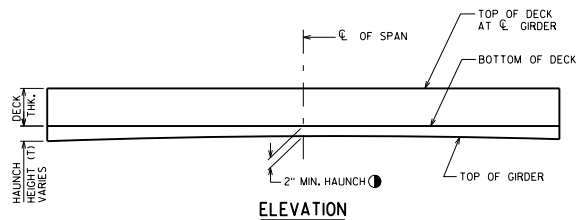

- * "A" = PRESTRESS CAMBER
- * "B" = DEAD LOAD DEFLECTION * ROUND OFF TO NEAREST 1/8"
- * "C" = RESIDUAL CAMBER

DESIGNER NOTES

PRESENT PRACTICE IS TO USE A MINIMUM "HAUNCH HEIGHT" (AT EDGE OF GIRDER FLANGE) OF 2" FOR DESIGN CALCULATIONS. THE MINIMUM HAUNCH (AT EDGE OF GIRDER FLANGE) ALLOWED IN CONSTRUCTION IS 1/4".


USE THE CALCULATED THEORETICAL AVERAGE "HAUNCH HEIGHT" AT CENTERLINE OF FLANGE FOR COMPUTING THE HAUNCH CONCRETE QUANTITY.

USE TOP OF DECK ELEVATIONS AND CALCULATED "HAUNCH HEIGHT" AT CENTERLINE OF GIRDER FOR COMPUTING BEAM SEAT ELEVATIONS AT SUBSTRUCTURES.

"INTERMEDIATE CONCRETE DIAPHRAGMS" SHALL BE USED ONLY WHEN THE USE OF STEEL DIAPHRAGMS IS NOT FEASIBLE BECAUSE OF UTILITIES OR FOR OTHER SPECIAL SITUATIONS. ONLY ONE TYPE OF INTERMEDIATE DIAPHRAGM SHALL BE SHOWN ON THE PLANS. THE USE OF BOTH INTERMEDIATE CONCRETE & STEEL DIAPHRAGMS ON THE SAME BRIDGE IS NOT ALLOWED.

FOR SKEWS $\leq 10^\circ$, PLACE INTERMEDIATE DIAPHRAGMS IN A STRAIGHT LINE. REFER TO STANDARD 19.36. PROVIDE OFFSET FOR SKEWS $> 10^\circ$.

PIER PILASTERS ARE TYPICALLY NOT USED, BUT MAY BE USED AS PART OF THE BRIDGE AESTHETIC PACKAGE ON 28", 36", 45", 54" AND 70" PRESTRESSED GIRDERS. PILASTERS ARE NOT USED ON 36W", 45W", 54W", 72W" OR 82W".


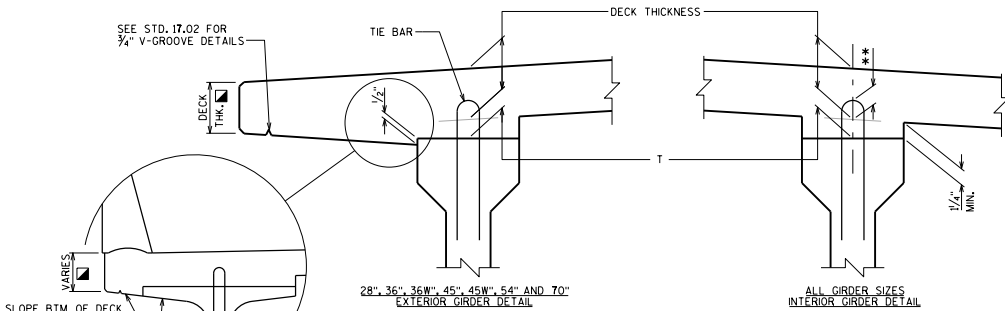


IF 1/4" MINIMUM HAUNCH HEIGHT AT EDGE OF GIRDER CANNOT BE MAINTAINED, THE GRADE LINE MAY BE REVISED BY THE ENGINEER AT THE OPTION OF THE CONTRACTOR. THE PLAN DECK THICKNESS SHALL BE HELD, NOTIFY THE STRUCTURES SECTION IF THE GRADE LINE IS RAISED FROM THE PLAN PROFILE BY MORE THAN 1/2" OR, ** IF 3" MINIMUM DECK EMBEDMENT OF TIE BAR CANNOT BE OBTAINED.


TO DETERMINE "T", ELEV. OF TOP OF GIRS. AT ϕ OF SUBSTRUCTURE UNITS & AT 1/10 POINTS OF EACH SPAN SHALL BE TAKEN. THEN FOLLOW THIS PROCESS:

TOP OF DECK ELEV. AT FINAL GRADE
 - TOP OF GIRDER ELEVATION
 + DEAD LOAD DEFLECTION
 - DECK THICKNESS
 = HAUNCH HEIGHT "T"

NOTE: AN AVERAGE HAUNCH ("T") WAS USED IN THE QUANTITY "CONCRETE MASONRY BRIDGES".

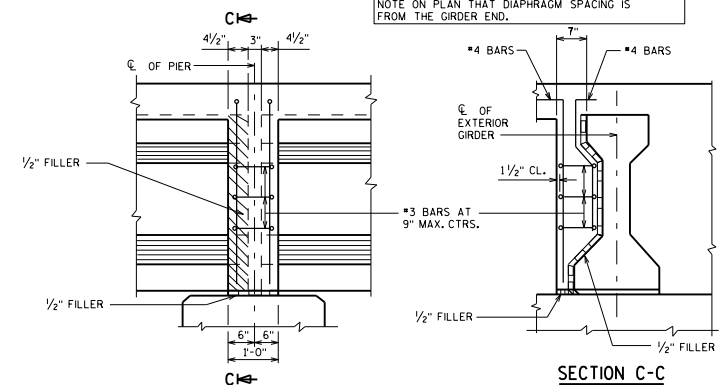

PILASTER DETAIL AT PIERS


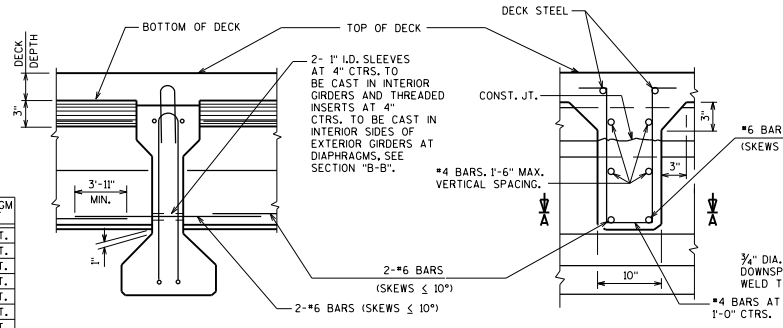


GIRDER DEPTH	DIAPHRAGM WEIGHT
28"	207*/FT.
36"	270*/FT.
36W"	259*/FT.
45"	338*/FT.
45W"	353*/FT.
54"	405*/FT.
54W"	446*/FT.
70"	634*/FT.
72W"	634*/FT.
82W"	738*/FT.

ELEVATION OF DIAPHRAGM

SECTION THRU DIAPHRAGM

INTERMEDIATE CONCRETE DIAPHRAGM DETAILS

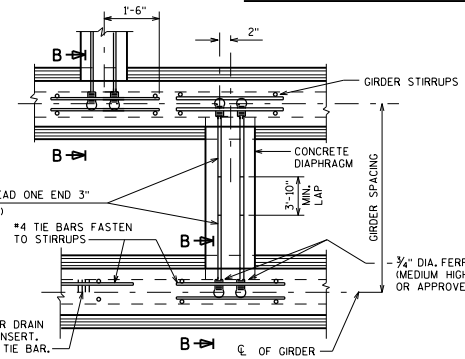

SECTION A-A
SKEW ANGLES $> 10^\circ$


PRESTRESSED GIRDER DETAILS

BUREAU OF STRUCTURES


WISCONSIN DEPARTMENT OF TRANSPORTATION

DATE: 1-19


APPROVED: *Laura Shadewald*

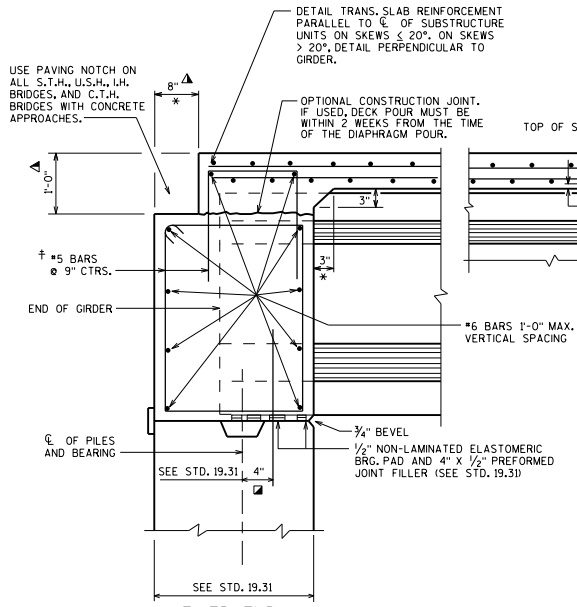


**FIXED END
FOR SKEWED AND SQUARE STRUCTURES**

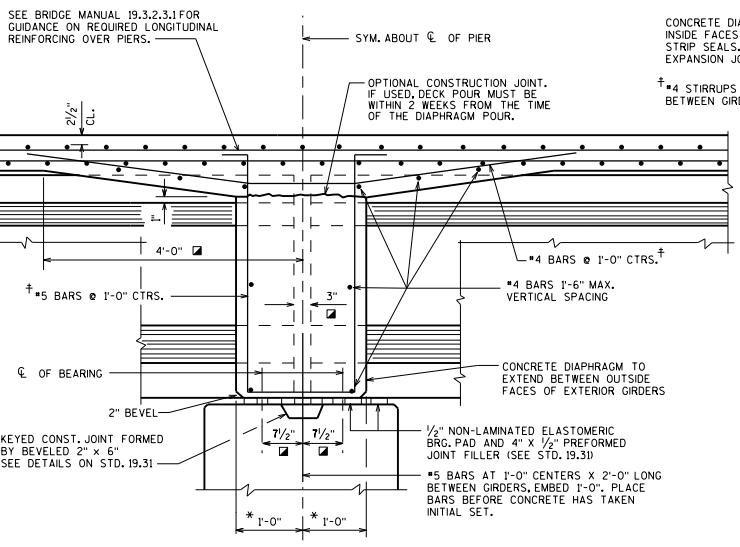

DIAPHRAGM AT 1/2" ELASTOMERIC BEARING

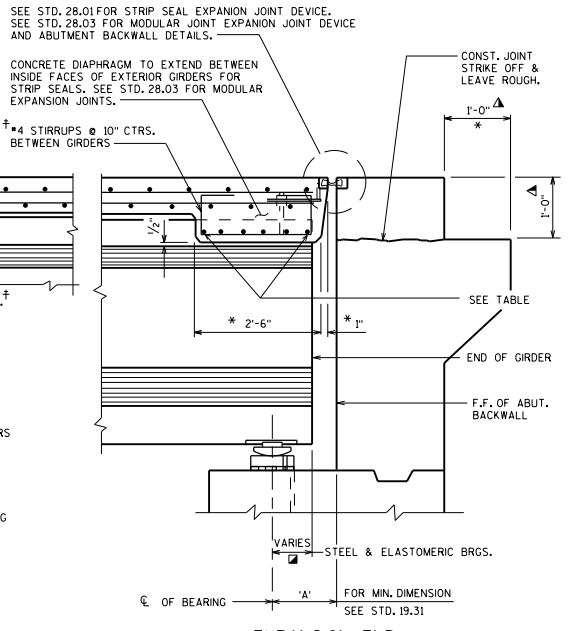

EXPANSION END

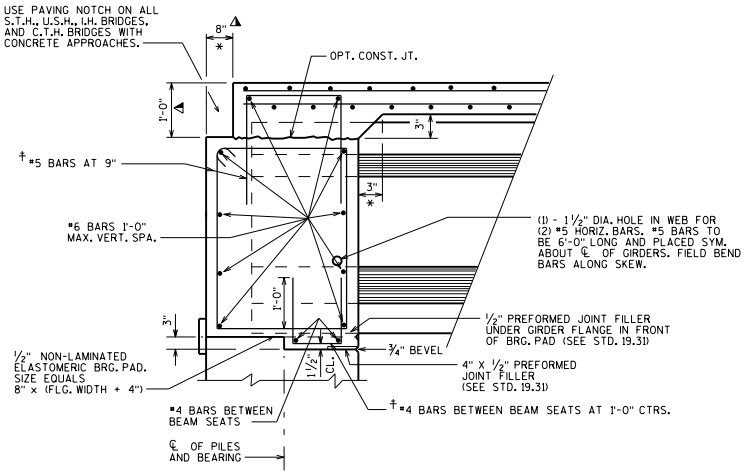

**PRESTRESSED GIRDER WITH
SEMI-EXPANSION SEAT**

EXPANSION END DIAPHRAGM STEEL


DIAPHRAGM LENGTH (ALONG SKEW) BETWEEN GIRDERS (CL TO CL OF GRDS.)	NO. OF BARS & BAR SIZE	
	28"	36"
≤ 8'-4"	6 - #6	6 - #6
> 8'-4" ≤ 11'-4"	6 - #8	6 - #7
> 11'-4" ≤ 14'-9"		6 - #8

DESIGNER NOTES

LAP LENGTHS FOR ALL BARS SHALL BE BASED ON A "CLASS C" TENSION LAP SPLICE, EXCEPT HORIZONTAL DIAPHRAGM BARS, IF SPLICED, CAN UTILIZE A "CLASS A" TENSION LAP SPLICE.

LEGEND

- ☑ DIMENSION IS TAKEN PARALLEL TO CL GIRDER.
- * DIMENSION IS TAKEN NORMAL TO CL SUBSTRUCTURE UNITS.
- ▲ PAVING NOTCH IS 1'-0" WIDE BY 1'-4" DEEP IF STRUCTURAL APPROACH SLAB (STD. 12.10) IS USED. SHOW NO. 9 STAINLESS STEEL BAR (STD. 12.12) FOR STRUCTURAL APPROACH SLAB ON THE SECTION THRU ABUT. OR ABUT. DIAPH.
- † BARS PLACED PARALLEL TO GIRDERS. SPACING PERPENDICULAR TO CL GIRDERS.

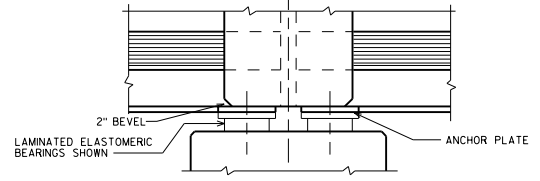

**DIAPHRAGM AT STEEL OR ELASTOMERIC BEARINGS
SECTION THRU DIAPHRAGM AT PIER**

FOR STEEL BEARINGS, FORM DIAPHRAGM APPROXIMATELY 1/2" ABOVE BEARING KEEPER BARS


SEE STANDARD 19.34 FOR 36W" & 45W" PRESTRESSED GIRDERS SLAB AND SUPERSTRUCTURE DETAILS

SEE STANDARD 19.35 FOR 54W", 72W" & 82W" PRESTRESSED GIRDERS SLAB & SUPERSTRUCTURE DETAILS.


28" & 36" PRESTRESSED GIRDERS SLAB & SUPERSTRUCTURE DETAILS

BUREAU OF STRUCTURES


APPROVED: *Laura Shadewald* DATE: 1-19

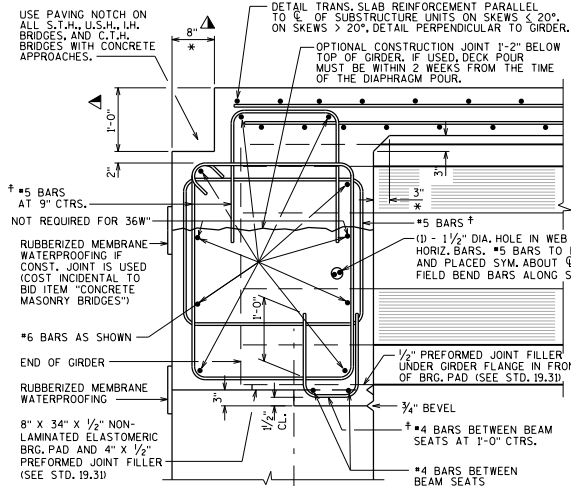


PRESTRESSED GIRDER WITH SEMI-EXPANSION SEAT

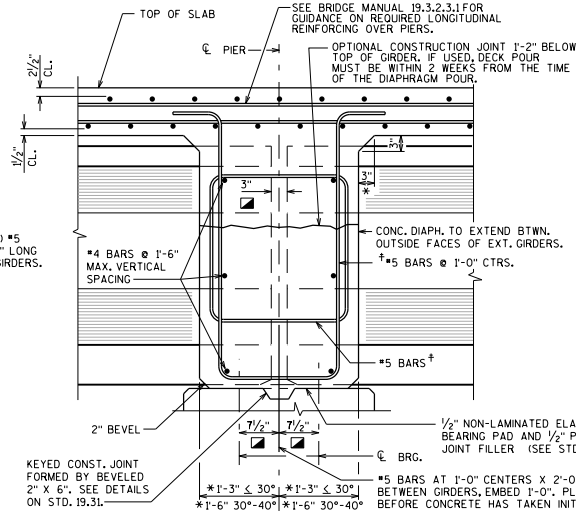


DIAPHRAGM AT 1/2" ELASTOMERIC BEARING

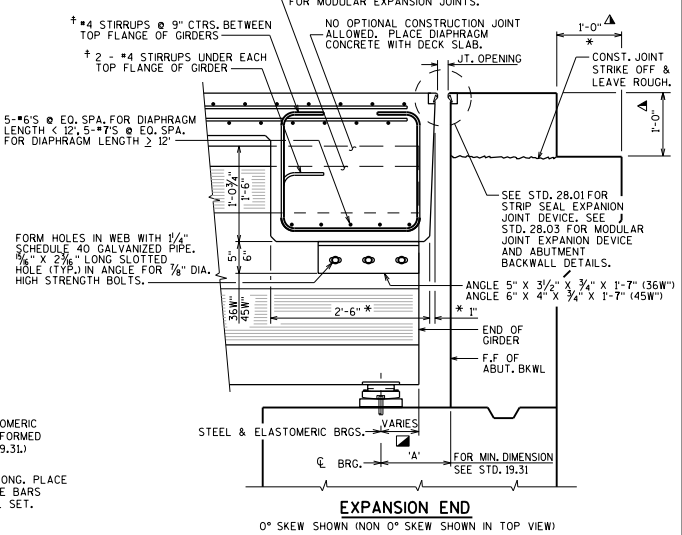


EXPANSION END
0° SKEW SHOWN (NON 0° SKEW SHOWN IN TOP VIEW)

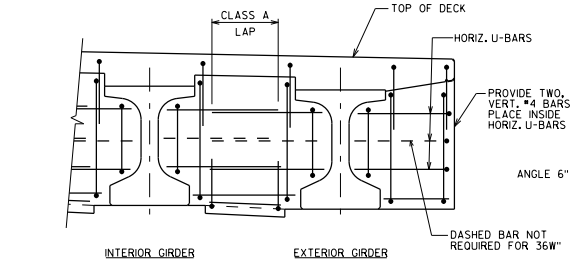


PART TRANSVERSE SECTION AT DIAPHRAGM SEMIEXPANSION END

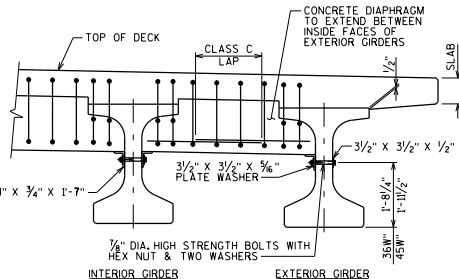

PART TRANSVERSE SECTION AT DIAPHRAGM EXPANSION END

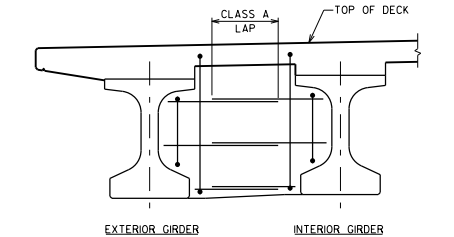

PART TRANSVERSE SECTION AT DIAPHRAGM PIER

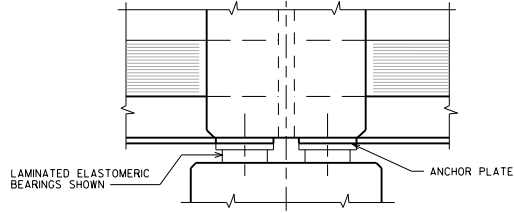


DIAPHRAGM AT STEEL OR ELASTOMERIC BEARINGS SECTION THRU DIAPHRAGM AT PIER


FOR STEEL BEARINGS, FORM DIAPHRAGM APPROXIMATELY 1/2" ABOVE BEARING KEEPER BARS

LEGEND

- ▣ DIMENSION IS TAKEN PARALLEL TO CL GIRDER.
- * DIMENSION IS TAKEN NORMAL TO CL SUBSTRUCTURE UNITS.
- ▲ PAVING NOTCH IS 1'-0" WIDE BY 1'-4" DEEP IF STRUCTURAL APPROACH SLAB (STD. 12.10) IS USED. SHOW NO. 9 STAINLESS STEEL BAR (STD. 12.12) FOR STRUCTURAL APPROACH SLAB ON THE SECTION THRU ABUT. OR ABUT. DIAPH.
- † BARS PLACED PARALLEL TO GIRDERS, SPACING PERPENDICULAR TO CL GIRDERS.



ANGLE

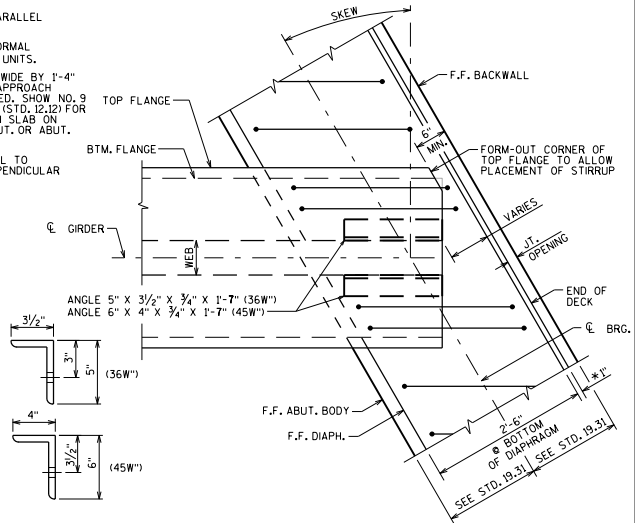

TOP VIEW OF DIAPHRAGM (EXPANSION END)

NOTES

- ALL DIAPHRAGM SUPPORT HARDWARE SHALL BE INCIDENTAL TO "CONCRETE MASONRY BRIDGES".
- DIAPHRAGM SUPPORT ANGLES SHALL BE ASTM A709 GRADE 36.
- ALL DIAPHRAGM SUPPORT HARDWARE INCLUDING BOLTS, NUTS AND WASHERS SHALL BE GALVANIZED AFTER FABRICATION.
- STEEL DIAPHRAGM SUPPORT ANGLE TO CONCRETE WEB CONNECTION SHALL BE SNUG-TIGHT PLUS 1/4 TURN. HIGH STRENGTH BOLTS FOR WEB CONNECTION SHALL MEET THE REQUIREMENTS FOR ASTM A325 OR ASTM A449.


DESIGNER NOTE

LAP LENGTHS FOR DIAPHRAGM REINFORCEMENT SHALL BE BASED ON A CLASS "C" TENSION LAP SPLICE, UNLESS OTHERWISE NOTED.


PRESTRESSED 36" & 45" GIRDER SLAB & SUPERSTRUCTURE DETAILS

BUREAU OF STRUCTURES


APPROVED: *Laura Shadewald* DATE: 1-19

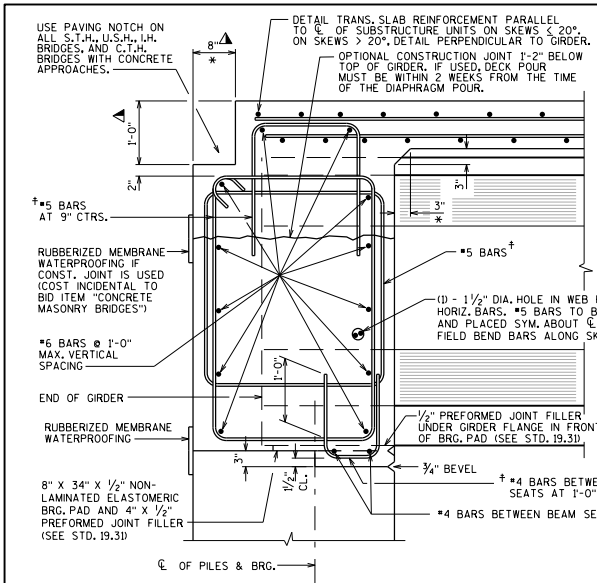

PRESTRESSED GIRDER WITH SEMI-EXPANSION SEAT





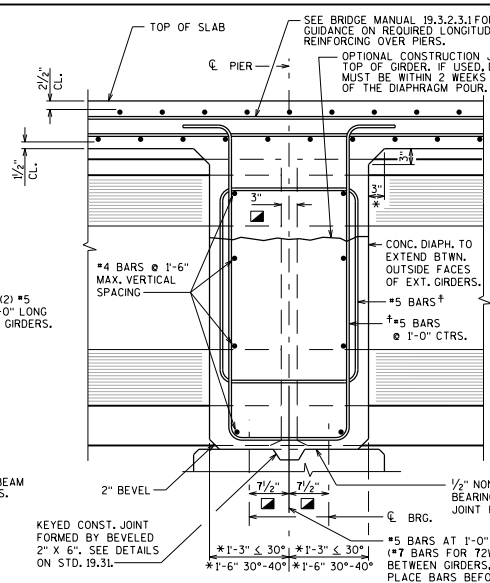


DIAPHRAGM AT 1/2" ELASTOMERIC BEARING

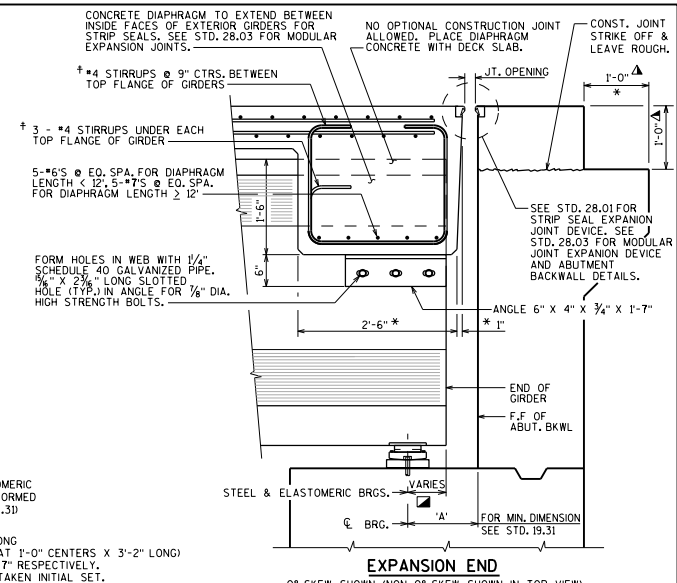


LEGEND

- ▣ DIMENSION IS TAKEN PARALLEL TO ϕ GIRDER.
- * DIMENSION IS TAKEN NORMAL TO ϕ SUBSTRUCTURE UNITS.
- △ PAVING NOTCH IS 1'-0" WIDE BY 1'-4" DEEP IF STRUCTURAL APPROACH SLAB (STD. 12.10) IS USED. SHOW NO. 9 STAINLESS STEEL BAR (STD. 12.12) FOR STRUCTURAL APPROACH SLAB ON THE SECTION THRU ABUT. OR ABUT. DIAPH.
- † BARS PLACED PARALLEL TO GIRDERS. SPACING PERPENDICULAR TO ϕ GIRDERS.

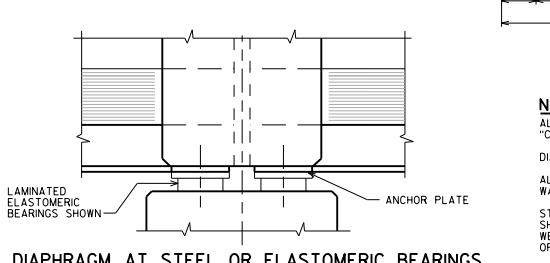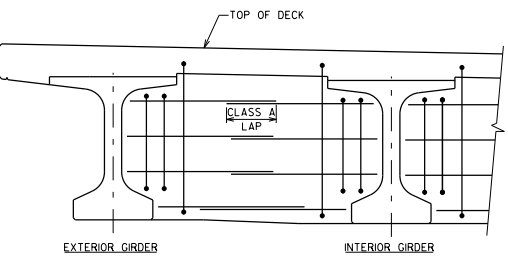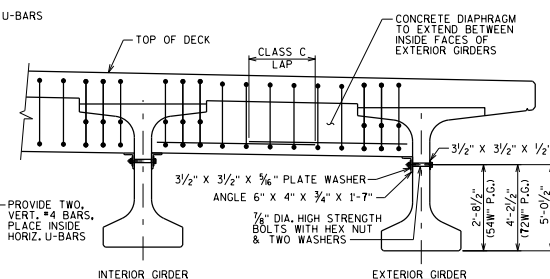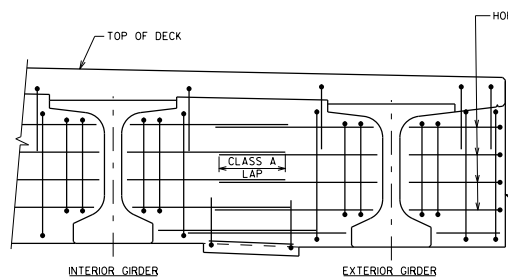

FOR STEEL BEARINGS, FORM DIAPHRAGM APPROXIMATELY 1/2" ABOVE BEARING KEEPER BARS

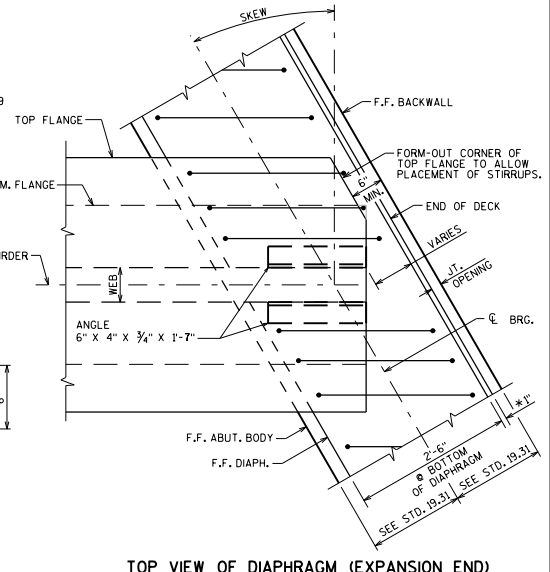

NOTES

- ALL DIAPHRAGM SUPPORT HARDWARE SHALL BE INCIDENTAL TO "CONCRETE MASONRY BRIDGES".
- DIAPHRAGM SUPPORT ANGLES SHALL BE ASTM A709 GRADE 36.
- ALL DIAPHRAGM SUPPORT HARDWARE INCLUDING BOLTS, NUTS AND WASHERS SHALL BE GALVANIZED AFTER FABRICATION.
- STEEL DIAPHRAGM SUPPORT ANGLE TO CONCRETE WEB CONNECTION SHALL BE SNUG-TIGHT PLUS 1/4 TURN, HIGH STRENGTH BOLTS FOR WEB CONNECTION SHALL MEET THE REQUIREMENTS FOR ASTM A325 OR ASTM A449.

DESIGNER NOTES

LAP LENGTHS FOR DIAPHRAGM REINFORCEMENT SHALL BE BASED ON A CLASS "C" TENSION LAP SPLICE, UNLESS OTHERWISE NOTED.

PRESTRESSED 54" & 82" GIRDER SLAB & SUPERSTRUCTURE DETAILS

BUREAU OF STRUCTURES

APPROVED: *Laura Shadewald*

DATE: 1-19

TABLE

GIRDER HEIGHT	DIM. "A"	DIM. "B"	DIM. "L"	* DIM. "X"
28"	1'-0 1/8"	5 7/8"	9 1/2"	2 1/4"
36"	1'-2 7/8"	9 7/8"	1'-1 1/2"	3 1/4"
45"	1'-5 3/8"	1'-1 7/8"	1'-5 1/2"	2 1/4"
45W"	1'-9 1/8"	8 3/4"	1'-0 1/2"	2 3/4"
54"	1'-7 7/8"	1'-5 3/8"	1'-9 1/2"	4 1/4"
54W"	1'-9 1/8"	1'-5 3/8"	1'-9 1/2"	4 1/4"

NOTES

ALL DIAPHRAGM MATERIAL NOT EMBEDDED IN THE CONCRETE GIRDER SHALL BE PAID FOR AT THE UNIT PRICE BID FOR "STEEL DIAPHRAGMS B--", EACH.

EACH DIAPHRAGM BETWEEN GIRDERS SHALL CONSTITUTE ONE UNIT. ALL DIAPHRAGM STRUCTURAL STEEL SHALL BE ASTM A709 GRADE 36.


ALL DIAPHRAGM MATERIAL INCLUDING BOLTS, NUTS AND WASHERS SHALL BE GALVANIZED AFTER FABRICATION.

STEEL DIAPHRAGM TO CONCRETE WEB CONNECTION SHALL BE "SNUG-TIGHT PLUS 1/4 TURN, UNLESS NOTED OTHERWISE, HIGH STRENGTH BOLTS FOR WEB CONNECTION SHALL MEET THE REQUIREMENTS FOR ASTM A325 OR ASTM A449.


DESIGNER NOTES

FOR SPANS EQUAL TO OR LESS THAN 80'-0", PLACE ONE DIAPHRAGM AT MID-LENGTH OF GIRDER. FOR SPANS OVER 80'-0", PLACE AT 1/3 AND 2/3 POINTS.


ON THE PLANS, SHOW LOCATION OF INSERTS/HOLES FOR DIAPHRAGM TO WEB CONNECTION, NOT ONLY FROM THE BOTTOM OF THE GIRDER (DIM "A" AND "B"), BUT ALSO FROM THE ENDS OF EACH GIRDER.

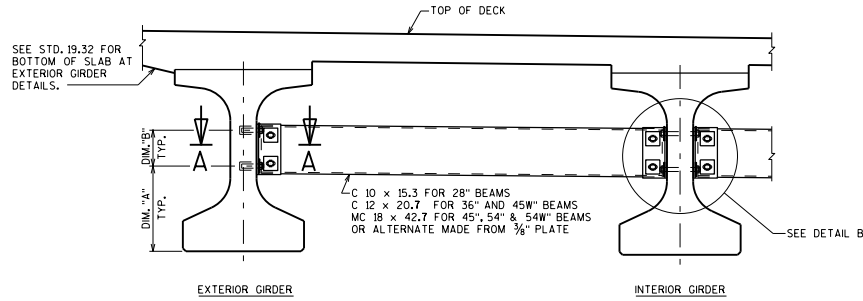


PART TRANSVERSE SECTION AT DIAPHRAGM




SECTION THRU DIAPHRAGM

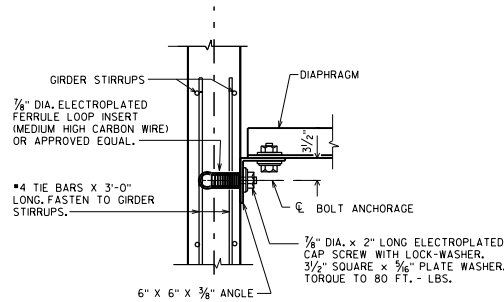


SECTION A-A (FOR EXTERIOR ATTACHMENT)

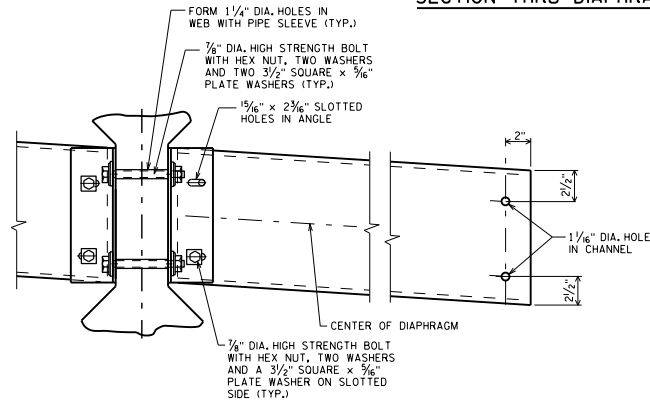


DETAIL B (FOR CONTINUOUS LINE OF DIAPHRAGMS)

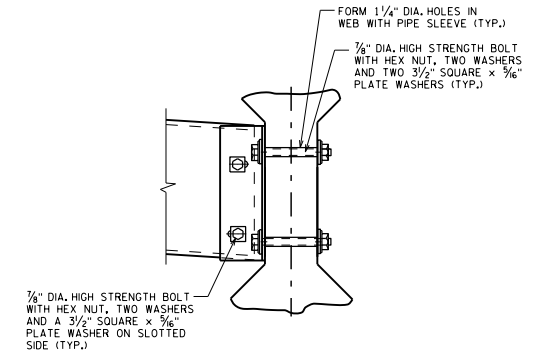


SECTION AT INTERIOR GIRDERS THRU DIAPHRAGM FOR SKEW ANGLES > 10°

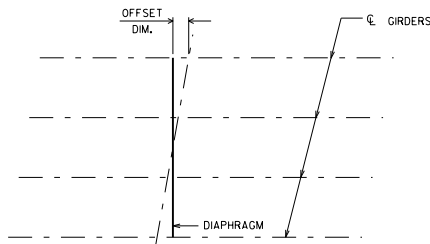

PLAN FOR SKEW ANGLES ≤ 10°

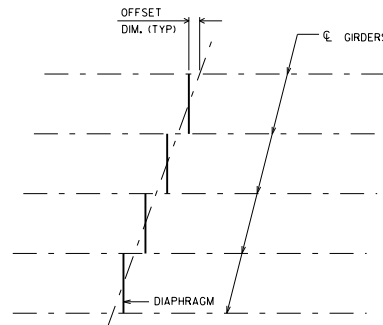

PLAN FOR SKEW ANGLES > 10°




INTER. STEEL DIAPHS. FOR 28", 36", 45", 45W" 54" & 54W" PRESTRESSED GIRDERS


BUREAU OF STRUCTURES

APPROVED: *Laura Shadewald* DATE: 7-22

STANDARD 19.36

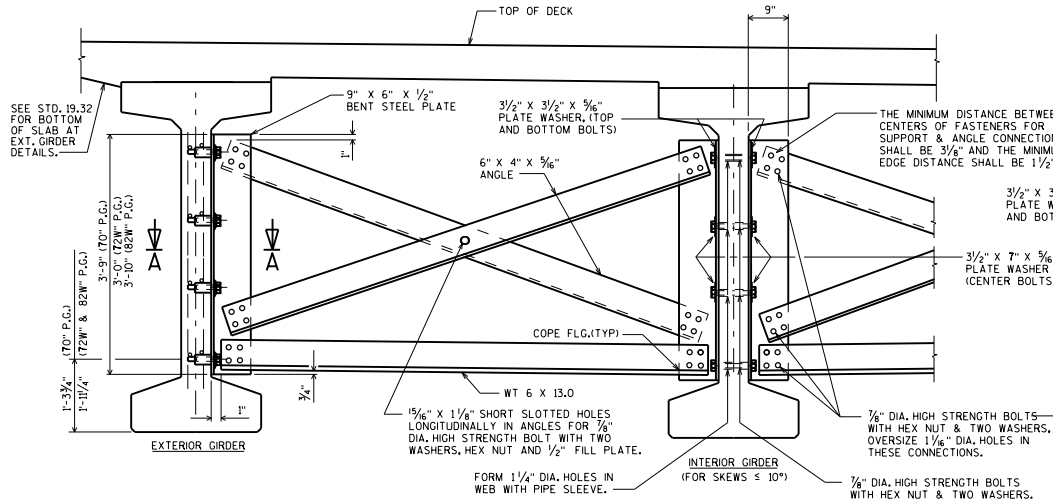


PART TRANSVERSE SECTION AT DIAPHRAGM

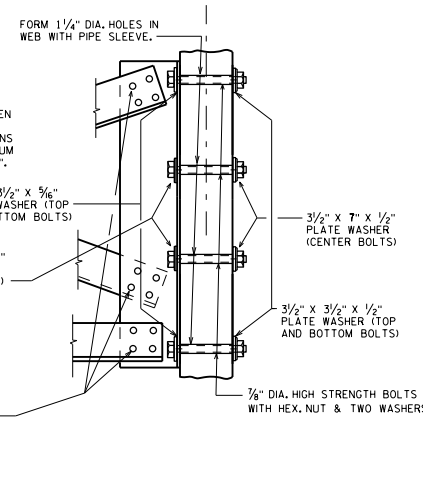


SECTION AT INTERIOR GIRDERS THRU DIAPHRAGM FOR SKEW ANGLES > 10°


NOTES
 ALL DIAPHRAGM MATERIAL NOT EMBEDDED IN THE CONCRETE GIRDER SHALL BE PAID FOR AT THE UNIT PRICE BID FOR "STEEL DIAPHRAGMS B-1", EACH.
 EACH DIAPHRAGM BETWEEN GIRDERS SHALL CONSTITUTE ONE UNIT.
 ALL DIAPHRAGM STRUCTURAL STEEL SHALL BE ASTM A709 GRADE 36.
 ALL DIAPHRAGM MATERIAL INCLUDING BOLTS, NUTS AND WASHERS SHALL BE GALVANIZED AFTER FABRICATION.
 STEEL DIAPHRAGM TO CONCRETE WEB CONNECTION SHALL BE SNUG-TIGHT PLUS 1/4 TURN, UNLESS NOTED OTHERWISE. HIGH STRENGTH BOLTS FOR WEB CONNECTION SHALL MEET THE REQUIREMENTS FOR ASTM A325 OR ASTM A449.
DESIGNER NOTES
 FOR SPANS EQUAL TO OR LESS THAN 80'-0", PLACE ONE DIAPHRAGM AT MID-LENGTH OF GIRDER. FOR SPANS OVER 80'-0", PLACE AT 1/3 AND 2/3 POINTS.
 ON THE PLANS, SHOW LOCATION OF INSERTS/HOLES FOR DIAPHRAGM TO WEB CONNECTION, NOT ONLY FROM THE BOTTOM OF THE GIRDER (DIM "A" AND "B"), BUT ALSO FROM THE ENDS OF EACH GIRDER.

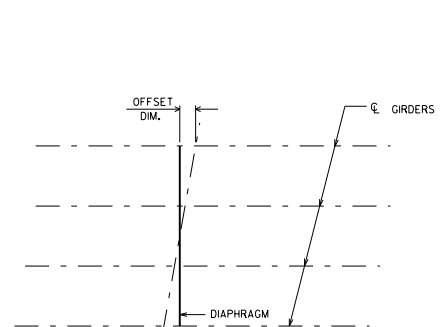


PLAN FOR SKEW ANGLES ≤ 10°

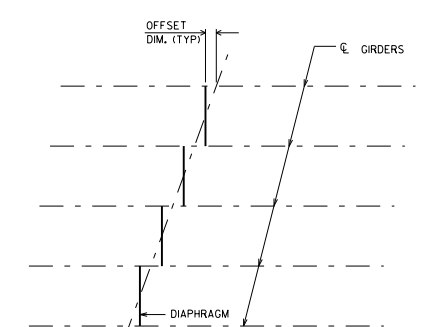

PLAN FOR SKEW ANGLES > 10°

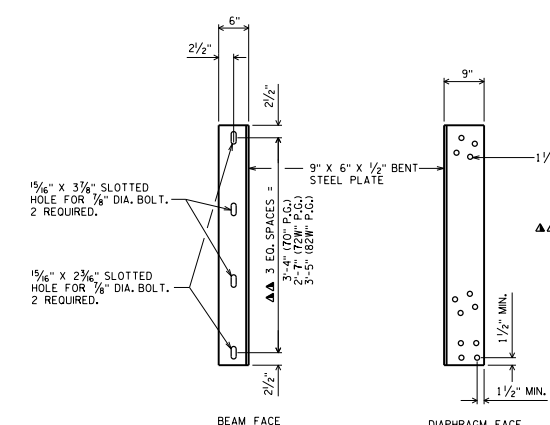

DIAPHRAGM SUPPORT

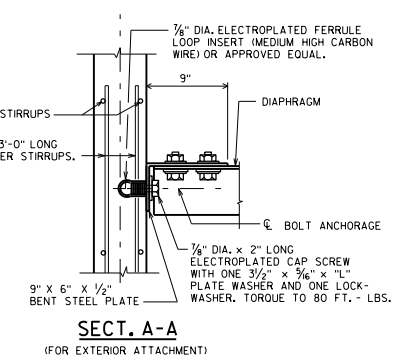


SECT. A-A (FOR EXTERIOR ATTACHMENT)


INTERMEDIATE STEEL DIAPHRAGMS FOR 70", 72W" & 82W" PRESTRESSED GIRDERS

BUREAU OF STRUCTURES

APPROVED: *Laura Shadewald* DATE: 7-17

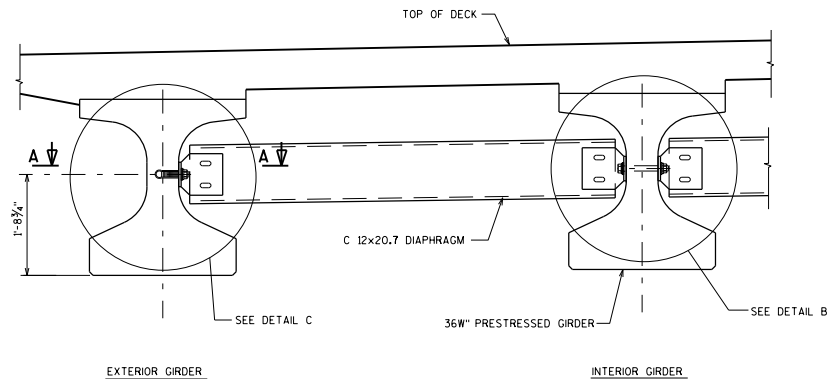


PART TRANSVERSE SECTION AT DIAPHRAGM

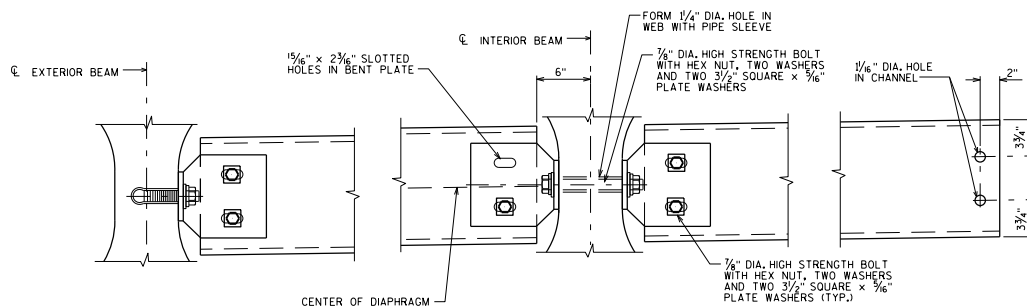


DETAIL C

DETAIL B

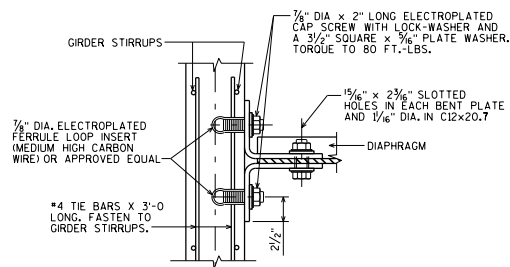


SECTION A-A
(FOR EXTERIOR ATTACHMENT)

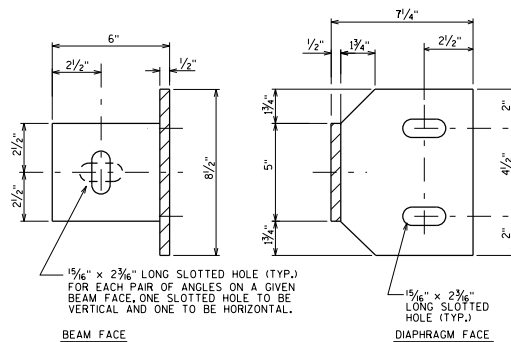


BEAM FACE

DIAPHRAGM FACE




ATTACHMENT TO CHANNEL

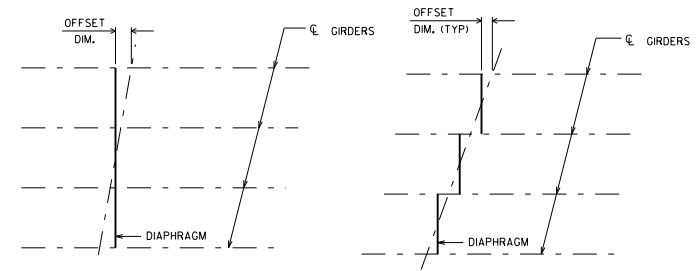

PLAN FOR SKEW ANGLES $\leq 10^\circ$

PLAN FOR SKEW ANGLES $> 10^\circ$

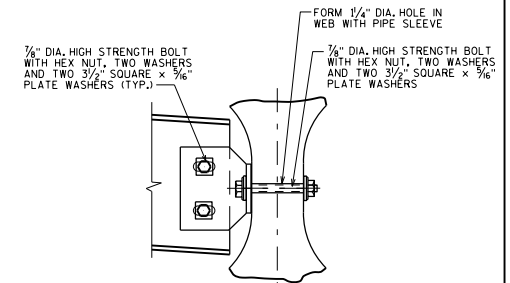

SECTION AT INTERIOR GIRDERS THRU DIAPHRAGM FOR SKEW ANGLES $> 10^\circ$

NOTES

ALL DIAPHRAGM MATERIAL NOT EMBEDDED IN THE CONCRETE GIRDER SHALL BE PAID FOR AT THE UNIT PRICE BID FOR "STEEL DIAPHRAGMS B-...", EACH.

EACH DIAPHRAGM BETWEEN GIRDERS SHALL CONSTITUTE ONE UNIT.

ALL DIAPHRAGM STRUCTURAL STEEL SHALL BE ASTM A709 GRADE 36.

ALL DIAPHRAGM MATERIAL INCLUDING BOLTS, NUTS AND WASHERS SHALL BE GALVANIZED AFTER FABRICATION.

STEEL DIAPHRAGM TO CONCRETE WEB CONNECTION SHALL BE SNUG-TIGHT PLUS 1/4 TURN, UNLESS NOTED OTHERWISE, HIGH STRENGTH BOLTS FOR WEB CONNECTION SHALL MEET THE REQUIREMENTS FOR ASTM A325 OR ASTM A449.

DESIGNER NOTES


FOR SPANS EQUAL TO OR LESS THAN 80'-0", PLACE ONE DIAPHRAGM AT MID-LENGTH OF GIRDER, FOR SPANS OVER 80'-0", PLACE AT 1/3 AND 2/3 POINTS.

ON THE PLANS, SHOW LOCATION OF INSERTS/HOLES FOR DIAPHRAGM TO WEB CONNECTION, NOT ONLY FROM THE BOTTOM OF THE GIRDER (DIM "A" AND "B"), BUT ALSO FROM THE ENDS OF EACH GIRDER.

INTERM. STEEL DIAPHS. FOR 36W" PRESTRESSED GIRDERS

BUREAU OF STRUCTURES


APPROVED: *Laura Shadewald* DATE: 7-19

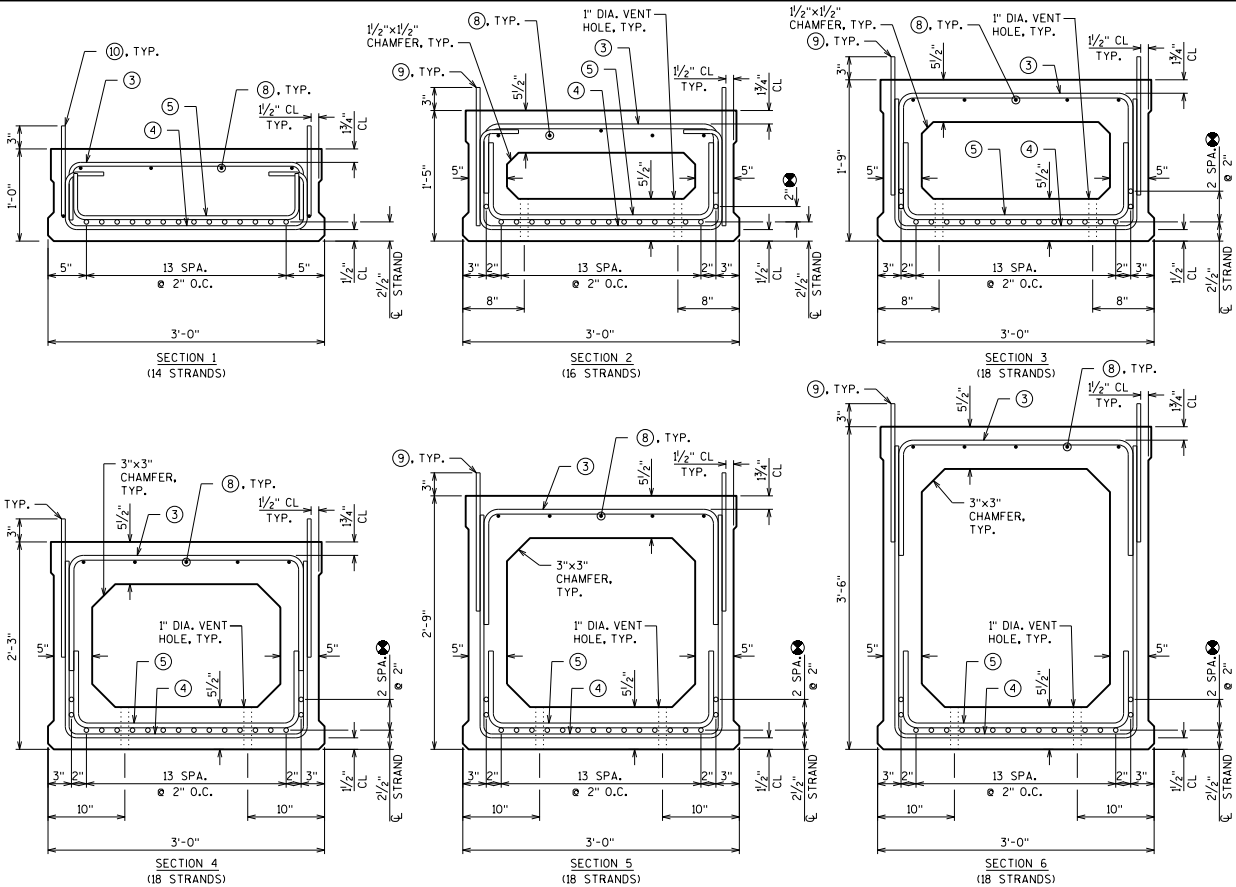

3'-0" SECTIONS

REBAR DIMENSION

SECT. DEPTH	SECT. NO.	"A"	"B"	"C"
1'-0"	1	7 1/2"	7 1/2"	6"
1'-5"	2	9"	1'-1"	10"
1'-9"	3	1'-3"	1'-5"	1'-2"
2'-3"	4	1'-3"	1'-11"	1'-8"
2'-9"	5	1'-3"	2'-5"	2'-2"
3'-6"	6	1'-3"	3'-2"	2'-11"

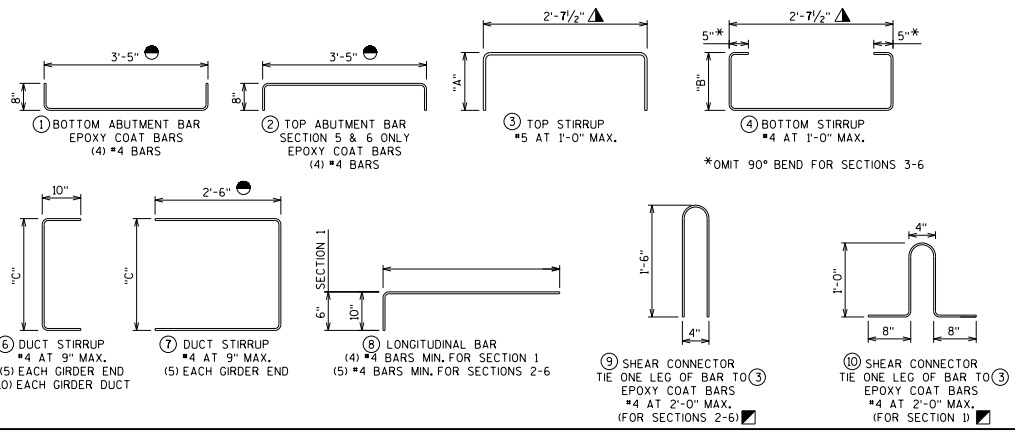

NOTES

THE CONCRETE MIX FOR THE PRESTRESSED BOX GIRDERS SHALL CONFORM TO SECTION 503.2.2 OF THE STANDARD SPECIFICATIONS.

AN APPROVED CONCRETE SEALER SHALL BE APPLIED TO THE BOTTOM OF THE GIRDERS AND THE EXTERIOR FACE OF EXTERIOR GIRDERS. DO NOT APPLY CONCRETE SEALER OR EPOXY TO THE SHEAR KEY OR THE TOP OF GIRDERS.

STRANDS SHALL BE FLUSH WITH END OF GIRDER. FOR CONCRETE ABUTMENTS, END OF STRANDS SHALL BE COATED WITH NON-BITUMINOUS JOINT SEALER. FOR GRS ABUTMENTS, COAT THE GIRDER ENDS, EXPOSED STRAND ENDS, AND ALL NON-BONDING SURFACES WITHIN 2 FEET OF THE GIRDER ENDS WITH A NON-PIGMENTED EPOXY CONFORMING TO AASHTO M-235 TYPE III, GRADE 2, CLASS B OR C. THE EPOXY SHALL BE APPLIED AT LEAST 3 DAYS AFTER MOIST CURING HAS CEASED AND PRIOR TO THE APPLICATION OF THE SEALER.

VOIDS SHALL BE VENTED AND DRAINED BY CASTING (2)-1" DIA. TUBES AT EACH END OF VOID SEGMENT. LOCATE TUBES AT BOTTOM EDGES OF THE CORNER FILLETS, AVOID STRAND LOCATIONS.

FOUR WAY SLING MUST BE USED TO ENGAGE ALL 4 LIFTING DEVICES ON BOTH ENDS OF UNITS.

POST-TENSIONING OF THE TRANSVERSE TENDONS SHALL NOT BEGIN UNTIL THE GROUT BETWEEN THE PRECAST BOX GIRDERS HAS BEEN ALLOWED TO CURE FOR 48 HOURS AND GROUT HAS REACHED A COMPRESSIVE STRENGTH OF 3,000 PSI.

SEAL WASHER SHALL BE SPONGE NEOPRENE GASKET 3/4" MIN. THICK. STRESS POCKETS SHALL BE FILLED WITH CHLORIDE FREE NON-SHRINK GROUT AFTER POST-TENSIONING.

TRANSITION BETWEEN CHANGING SLOPES OF POST-TENSIONING DUCTS SHALL BE PROVIDED BY EITHER A CIRCULAR OR PARABOLIC CURVE WITH A MINIMUM LENGTH OF 3'-0".

DESIGNER NOTES

USE OF PRESTRESSED BOX GIRDERS IS SUBJECT TO PRIOR-APPROVAL BY THE BUREAU OF STRUCTURES. SEE 19.3.2.3.2 IN THE BRIDGE MANUAL FOR ADDITIONAL GUIDANCE.

THE MAXIMUM RECOMMENDED SKEW ANGLE OF THE STRUCTURE SHALL BE 30°.

BEAM SEATS SHALL BE SLOPED ALONG THE SUBSTRUCTURE UNITS TO ACCOUNT FOR THE CROSS SLOPE OR SUPERELEVATION ON THE DECK.

SLOPE BEAM SEATS PARALLEL TO GRADE LINE IF GRADE AT BRG. > 1%, PLACE ELEVATIONS ON PLANS TO MEET THESE REQUIREMENTS.

STRANDS TO BE DESIGNED. MAXIMUM NUMBER OF STRANDS AND STRAND ARRANGEMENTS ARE SHOWN. STRANDS NOT TO BE DRAPED.

MULTI-SPAN STRUCTURES REQUIRE ANCHOR DOWELS AT THE PIERS, WHICH MAY REDUCE THE MAXIMUM NUMBER OF STRANDS AVAILABLE BY 2. (CURRENTLY NOT USED)

CONTACT THE BUREAU OF STRUCTURES FOR THE MOST CURRENT PRESTRESSED BOX GIRDER SPECIAL PROVISION.

SEE STANDARD 19.51 FOR SHEAR KEY RECESS DETAIL.

MATERIAL PROPERTIES

CONCRETE MASONRY BRIDGES	$f_c = 4,000$ PSI
BAR STEEL REINFORCEMENT, GRADE 60	$f_y = 60,000$ PSI
PRESTRESSED BOX GIRDERS, CONCRETE MASONRY	$f_c = 5,000$ PSI
STRANDS - 0.5" OR 0.6" DIA. ULTIMATE TENSILE STRENGTH	$f_y = 270,000$ PSI

PRE-TENSION

$f_t = 270,000$ P.S.I.
 $f_s = 0.75 \times 270,000 = 202,500$ P.S.I.
 for low relaxation strands

PI PER 0.5" DIA. STRAND = $0.1531 \times 202,500 = 31.00$ KIPS
 PI PER 0.6" DIA. STRAND = $0.217 \times 202,500 = 43.94$ KIPS


LEGEND

- DIMENSION GIVEN FOR A POST-TENSIONING DUCT 1'-10" FROM END OF PRESTRESSED BOX GIRDER.
- ▲ DIMENSION GIVEN FOR STIRRUPS PERPENDICULAR TO THE PRESTRESSED BOX GIRDER LENGTH. ADJUST THE DIMENSION FOR STIRRUPS AT SKEWED PRESTRESSED BOX GIRDER ENDS.
- ⊗ SHOW SPACING FOR THESE STRANDS ONLY IF REQUIRED BY DESIGN.
- SUBSTITUTE (1) BAR ON EXTERIOR EDGE OF EXTERIOR GIRDERS. SEE STANDARD 19.56.

3'-0" PRESTRESSED BOX GIRDER SECTIONS

BUREAU OF STRUCTURES


APPROVED: *Laura Shadewald* DATE: 7-18

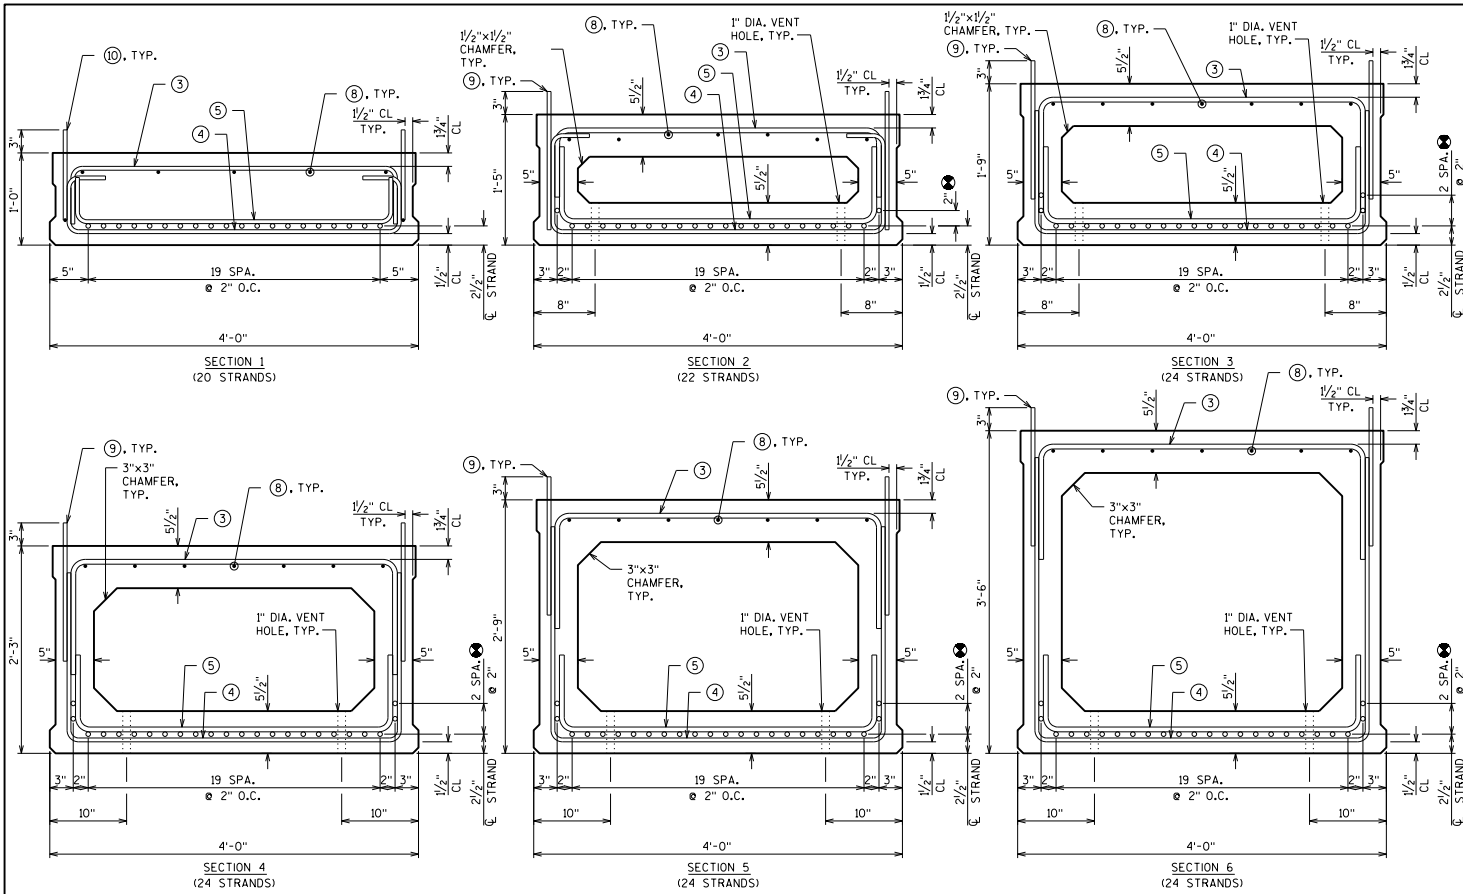

4'-0" SECTIONS

REBAR DIMENSION

SECT. DEPTH	SECT. NO.	"A"	"B"	"C"
1'-0"	1	7 1/2"	7 1/2"	6"
1'-5"	2	9"	1'-1"	10"
1'-9"	3	1'-3"	1'-5"	1'-2"
2'-3"	4	1'-3"	1'-11"	1'-8"
2'-9"	5	1'-3"	2'-5"	2'-2"
3'-6"	6	1'-3"	3'-2"	2'-11"

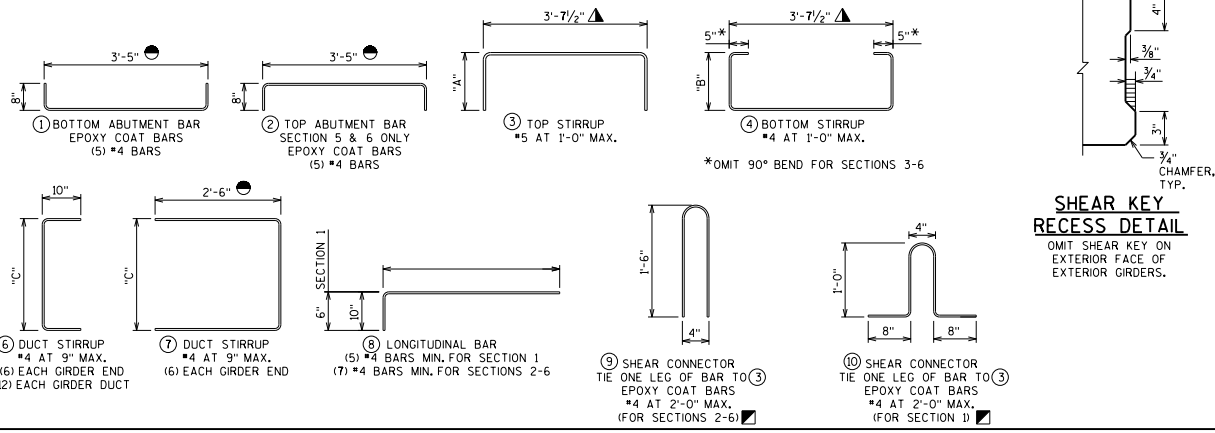

DESIGNER NOTE
SEE STANDARD 19.50 FOR NOTES, DESIGNER NOTES, MATERIAL PROPERTIES.


- LEGEND**
- DIMENSION GIVEN FOR A POST-TENSIONING DUCT 1'-10" FROM END OF PRESTRESSED BOX GIRDER.
 - ▲ DIMENSION GIVEN FOR STIRRUPS PERPENDICULAR TO THE PRESTRESSED BOX GIRDER LENGTH. ADJUST THE DIMENSION FOR STIRRUPS AT SKEWED PRESTRESSED BOX GIRDER ENDS.
 - ⊙ SHOW SPACING FOR THESE STRANDS ONLY IF REQUIRED BY DESIGN.
 - SUBSTITUTE (1) BAR ON EXTERIOR EDGE OF EXTERIOR GIRDERS. SEE STANDARD 19.56.

4'-0" PRESTRESSED BOX GIRDER SECTIONS

BUREAU OF STRUCTURES


DATE:

APPROVED: *Laura Shadewald* 1-18

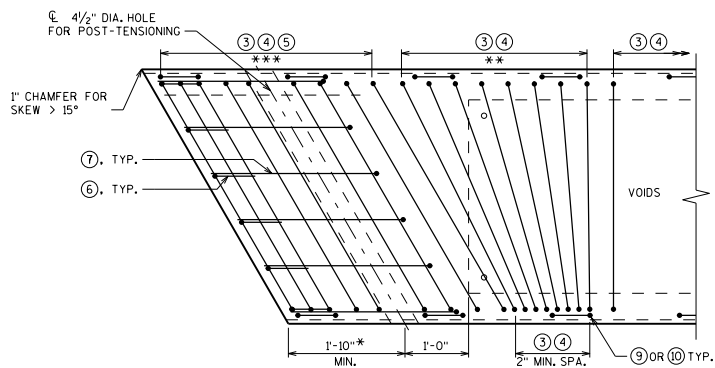


PART GIRDER PLAN WITH SKEW

①, ② & #4 TRANSVERSE BARS NOT SHOWN FOR CLARITY

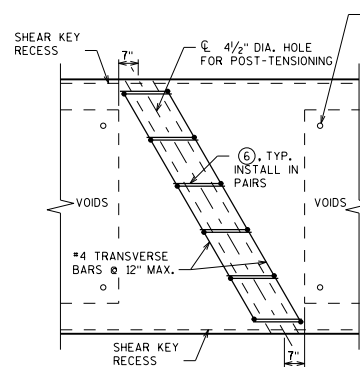

INTERIOR GIRDER DUCT PLAN

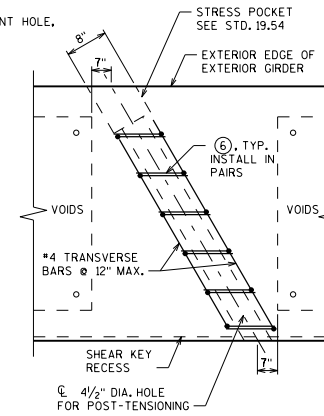

EXTERIOR GIRDER DUCT PLAN


LEGEND

- ☆ BARS NOT REQUIRED WHEN USED ON GRS ABUTMENTS.
- ◆ BARS PLACED PARALLEL TO GIRDERS. SPACING IS PERPENDICULAR TO THE ϵ OF THE GIRDERS.
- * WHEN WINGS ARE PARALLEL TO ABUTMENT ϵ , USE DIMENSIONS TO ALLOW FOR EASE OF POST-TENSIONING OPERATION.
- ** PLACE AT 5" MAX. SPACING UNTIL PERPENDICULAR TO THE ϵ OF THE GIRDER.
- *** PLACE ALONG SKEW FROM END OF PRESTRESSED BOX GIRDER UNTIL ALL END BLOCK BOTTOM STIRRUP BARS, ⑤, ARE PLACED.

DESIGNER NOTES


FOR BAR BEND DETAILS, SEE STANDARD 19.50 AND STANDARD 19.51

FOR SKEWED STRUCTURES CAST END OF PRESTRESSED BOX GIRDER ALONG SKEW.

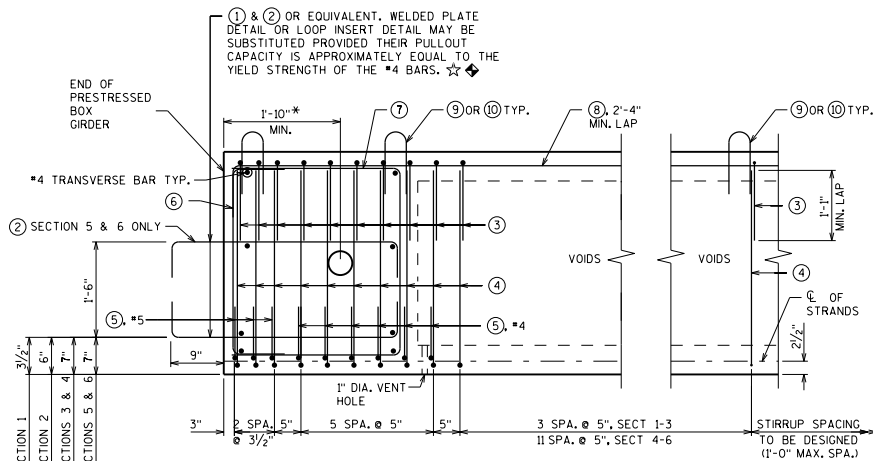


PART GIRDER ELEVATION SHOWING 0° SKEW


PLACE #4 TRANSVERSE BARS AS SHOWN ALONG SKEW




INTERIOR GIRDER DUCT ELEVATION



EXTERIOR GIRDER DUCT ELEVATION



WELDED PLATE DETAIL
(EQUIVALENT TO ONE #4 BAR)




LOOP INSERT DETAIL

PRESTRESSED BOX GIRDER DETAILS 1




BUREAU OF STRUCTURES

APPROVED: *Laura Shadewald* DATE: 1-17

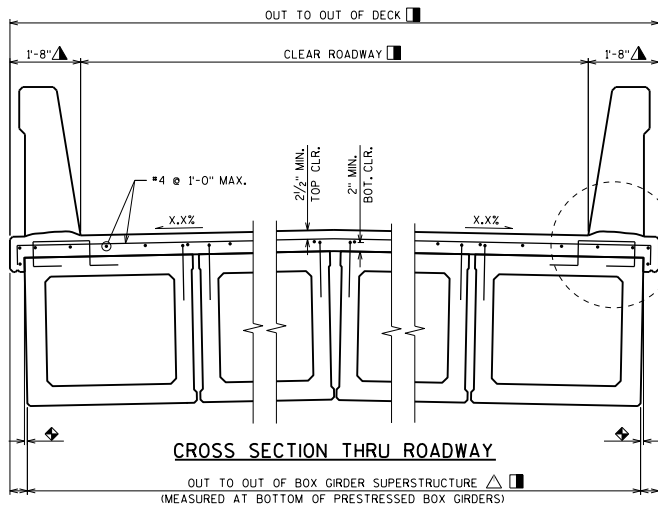


CROSS SECTION THRU ROADWAY

OUT TO OUT OF BOX GIRDER SUPERSTRUCTURE
(MEASURED AT BOTTOM OF PRESTRESSED BOX GIRDERS)

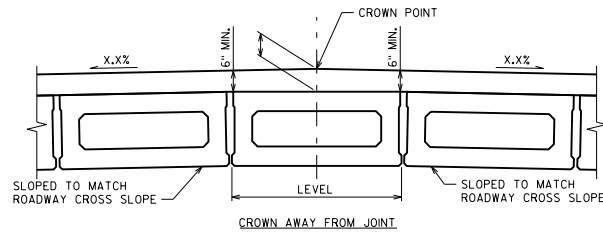

CROWN DETAIL AT LOCATION OF MIN. DECK THICKNESS

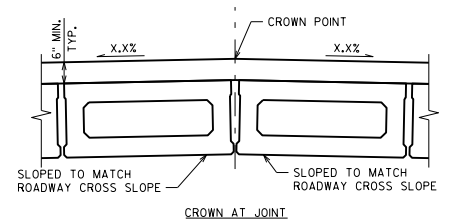


CROWN AT JOINT

NUMBER OF SECTIONS


CLEAR ROADWAY	3'-0" SECTION	4'-0" * SECTION
26'-0"	10	7
30'-0"	11	8
36'-0"	13	10
40'-0"	14	11
44'-0"	16	12

* 4'-0" SECTIONS PREFERRED

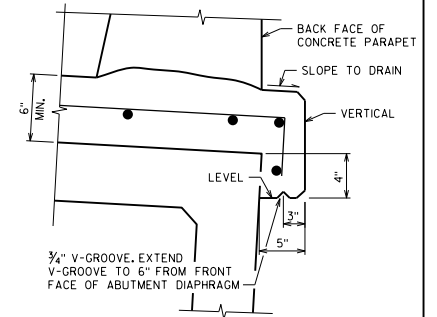


DECK OVERHANG DETAIL


SEE STANDARD 19.56 FOR ADDITIONAL DETAILS

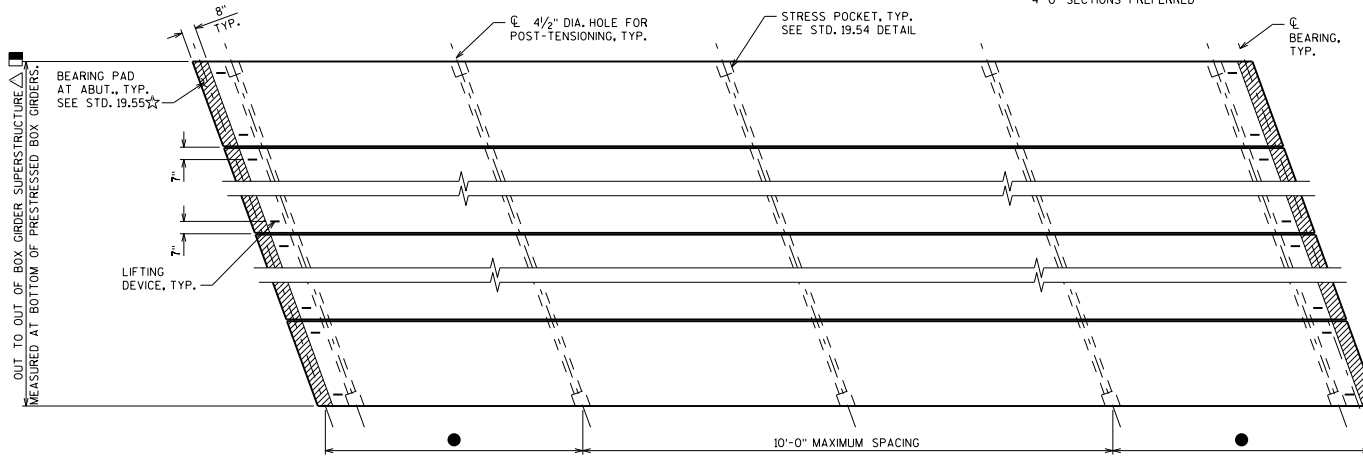

PLAN



DEAD LOAD DEFLECTION DIAGRAM



DECK THICKNESS DIAGRAM

■ TO DETERMINE DECK THICKNESS AT GIRDER ENDS FOLLOW THIS PROCESS:

- + 6" MIN. DECK SLAB THICKNESS
- + FIELD MEASURED GIRDER CAMBER (AT MID SPAN)
- DEADLOAD DEFLECTION (AT MIDSPAN)
- = DECK THICKNESS, †

NOTE: PLAN DECK THICKNESS BASED ON THEORETICAL INITIAL CAMBER VALUE. 1/4 PT. MAY BE INTERPOLATED. USE FIELD MEASURED GIRDER CAMBER FOR ACTUAL DECK THICKNESS. THE 1/4 PT. IS INTERPOLATED BETWEEN DECK THICKNESS AT THE END OF DECK AND MIDSPAN.

** THE THEORETICAL INITIAL CAMBER VALUE AT THE TIME OF STRAND RELEASE AT MIDSPAN MULTIPLIED BY A FACTOR OF 1.4 TO ACCOUNT FOR CAMBER GROWTH FROM THE TIME OF STRAND RELEASE TO JOBSITE PLACEMENT.

SPAN	CAMBER (IN.) **
1	

THESE VALUES ARE NOT TO BE USED IN DETERMINING †. USE FIELD MEASURED GIRDER CAMBER.

THESE VALUES ARE FOR INFORMATIONAL PURPOSES ONLY.

GIRDER DATA

SPAN	GIRDER	GIRDER LENGTH "L"	DEAD LOAD DEFL. (IN.)	CONC. STRENGTH f'c (PSI)		DIA. OF STRAND (IN.)	UNDRAPED PATTERN	
				1/4 PT.	1/2 PT.		TOTAL NO. OF STRANDS	TOTAL INITIAL PRESTRESS FORCE (KIPS)
1								

* MINIMUM CYLINDER STRENGTH OF CONCRETE @ TIME OF TRANSFER OF PRESTRESS FORCE.

DESIGNER NOTES

△ ACCOUNT FOR NUMBER OF PRESTRESSED BOX GIRDERS, NUMBER OF JOINTS (AT 1' NORMAL TO CL GIRDER), AND ROADWAY CROSS SLOPE.

◆ DIMENSION IS HORIZONTAL DISTANCE FROM TOP OF PRESTRESSED BOX GIRDER TO BOTTOM OF PRESTRESSED BOX GIRDER.

DECK THICKNESS DETERMINATION PROCEDURE IS BASED ON TANGENT PROFILE GRADE LINE. STRUCTURES WITH VERTICAL CURVE PROFILE GRADE LINES MAY REQUIRE ADDITIONAL INVESTIGATION.

NOTES

NOTES: AN AVERAGE DECK THICKNESS OF WAS USED IN THE QUANTITY "CONCRETE MASONRY BRIDGES".

VARIATIONS TO THE GRADE LINE OVER 1/4" MUST BE SUBMITTED BY THE FIELD ENGINEER TO THE STRUCTURES DESIGN SECTION FOR REVIEW.

LEGEND

☆ BEARING PAD NOT REQUIRED FOR CRS ABUTMENTS.

● 1/4 SPAN FOR SPANS UP TO 80'-0".
1/5 SPAN FOR SPANS OVER 80'-0".

■ DIMENSION ASSUMES 1" JOINT WIDTH. JOINT WIDTH DIMENSIONS MAY VARY DUE TO ±1/4" JOINT TOLERANCES.

▲ MAY BE REDUCED TO 1'-7" TO MAINTAIN ROADWAY CLEAR WIDTH.



PRESTRESSED BOX GIRDER DETAILS 2




BUREAU OF STRUCTURES

APPROVED: *Laura Shadewald*

DATE: 7-18

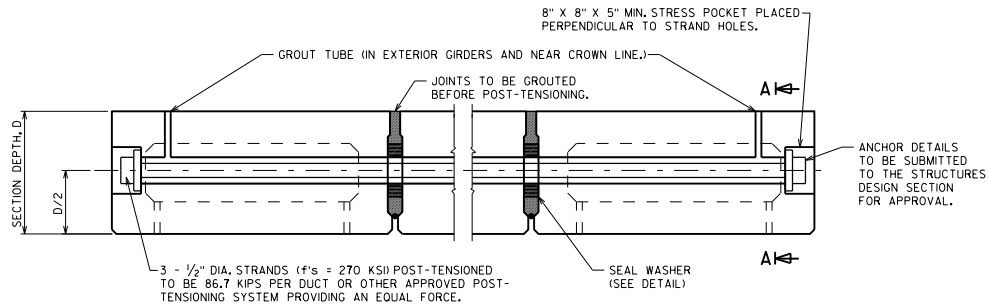



SECTION A-A



SHEAR KEY DETAIL

POST-TENSIONING DETAILS - ONE DUCT PER DIAPHRAGM


(SECTIONS 1 THROUGH 4)

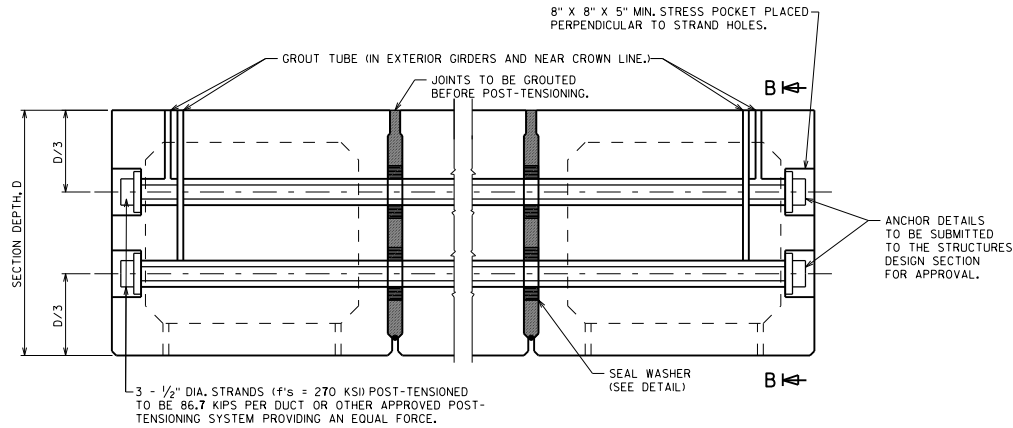


SECTION B-B

POST-TENSIONING DETAILS - TWO DUCTS PER DIAPHRAGM


(SECTIONS 5 AND 6)



SEAL WASHER
(MAY ALSO BE ROUND)



NO SKEW



WITH SKEW

STRESS POCKET DETAIL

PRESTRESSED BOX
GIRDER DETAILS 3




**BUREAU OF
STRUCTURES**


APPROVED: *Laura Shadewald*

DATE:
1-18

OPTIONAL CONSTRUCTION JOINT.

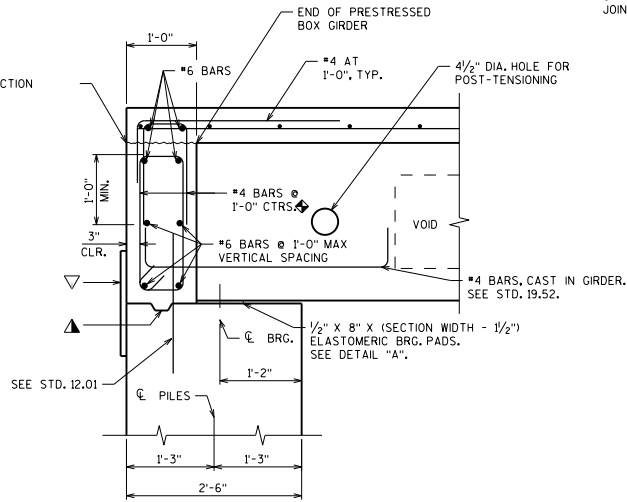


NO PAVING NOTCH - SECTIONS 1 THROUGH 4

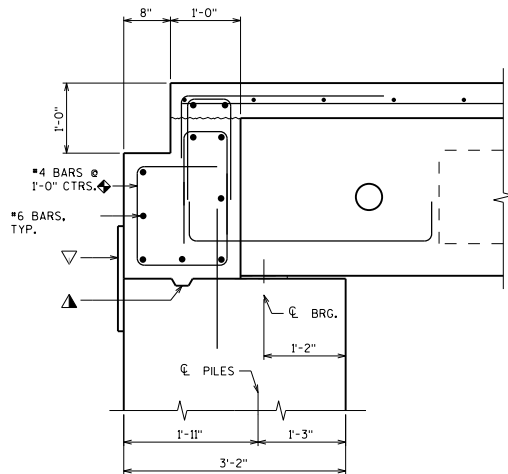


WITH PAVING NOTCH - SECTIONS 1 THROUGH 4

SEE NO PAVING NOTCH - SECTIONS 1 THROUGH 4 DETAIL FOR ADDITIONAL INFORMATION

OPTIONAL CONSTRUCTION JOINT.

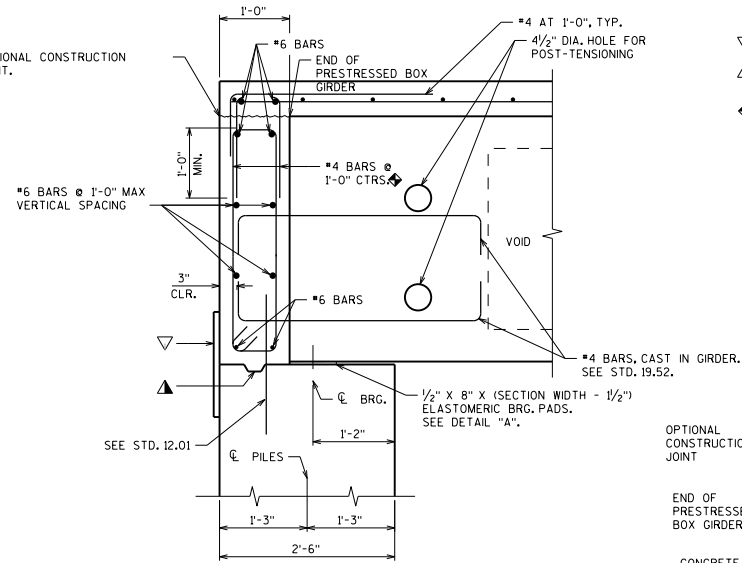

NO PAVING NOTCH - SECTIONS 5 AND 6

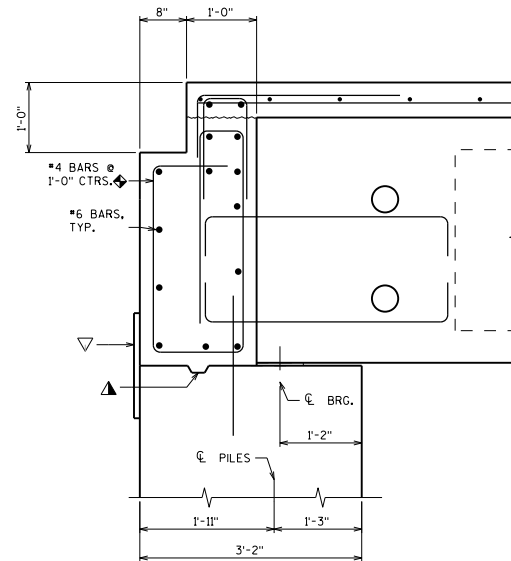


WITH PAVING NOTCH - SECTIONS 5 AND 6

SEE NO PAVING NOTCH - SECTIONS 5 AND 6 DETAIL FOR ADDITIONAL INFORMATION


LEGEND

- ▽ 1'-6" RUBBERIZED MEMBRANE WATERPROOFING
- ▲ KEYED CONSTRUCTION JOINT FORMED BY BEVELED 2" X 6".
- ◆ BARS PLACED PARALLEL TO GIRDERS. SPACING PERPENDICULAR TO CL GIRDERS.

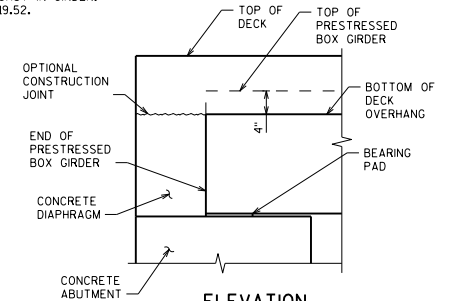

ELEVATION

(SHOWING DECK OVERHANG TERMINATION AT CONCRETE ABUTMENT)






DETAIL "A"

PRESTRESSED BOX GIRDER DETAILS 4




APPROVED: *Laura Shadewald*


DATE:
1-16

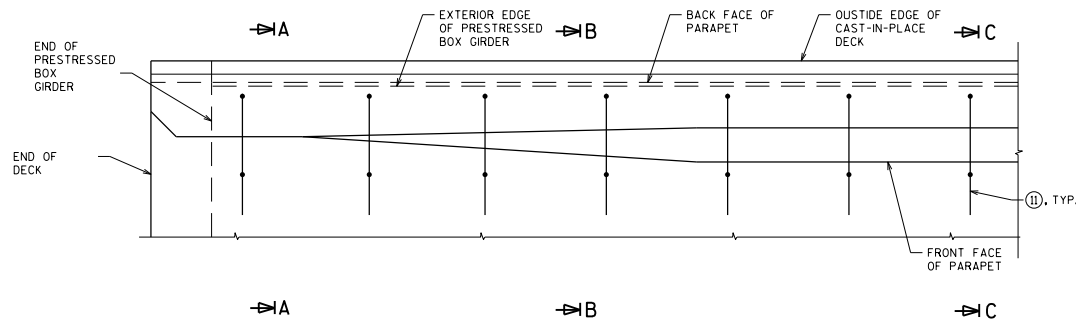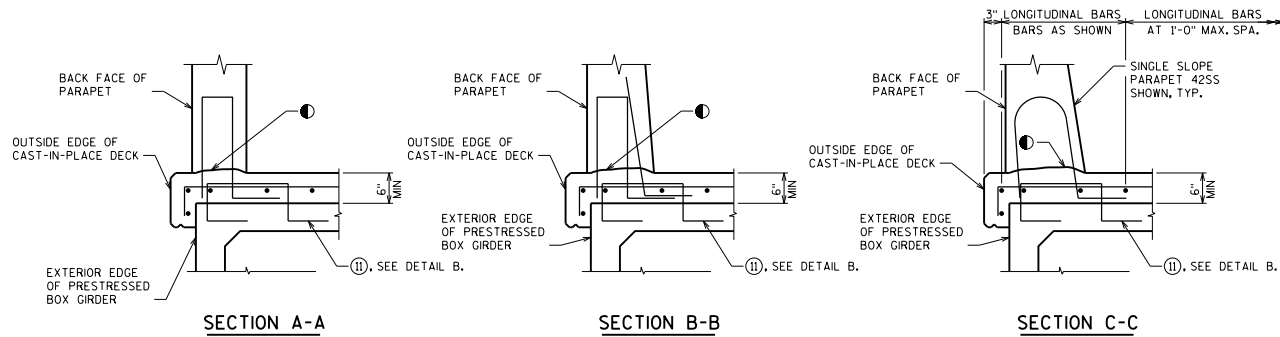

SHOWING REINFORCEMENT CAST INTO PRESTRESSED BOX GIRDER
 PARAPET AND DECK ARE SHOWN FOR CLARITY

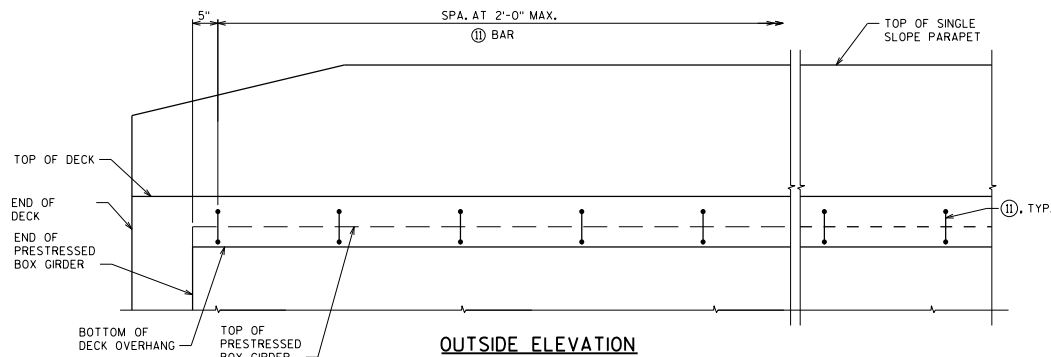

SHOWING REINFORCEMENT CAST INTO PRESTRESSED BOX GIRDER
 PARAPET AND DECK ARE SHOWN FOR CLARITY

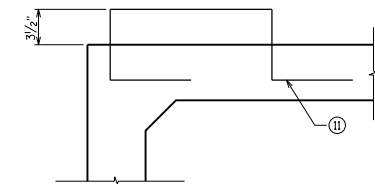

DETAIL B

LEGEND

● CONST. JOINT - STRIKE OFF AS SHOWN.

NOTE

BAR (II) TO BE PAID AS PART OF BID ITEM "PRESTRESSED BOX GIRDER TYPE XX-INCH".

DESIGNER NOTES

SEE CHAPTER 30 STANDARDS FOR SINGLE SLOPE PARAPET DETAILS.

DETAILS SHOWN ARE APPLICABLE FOR CONCRETE ABUTMENTS. DETAILS TO BE MODIFIED FOR GRS ABUTMENTS.

PRESTRESSED BOX GIRDER DETAILS 5



BUREAU OF STRUCTURES

APPROVED: *Laura Shadewald*

DATE: 7-16