



Wisconsin Department of Transportation

May 7, 2015

Division of Transportation Systems Development

Bureau of Project Development
 4802 Sheboygan Avenue, Rm 601
 P O Box 7916
 Madison, WI 53707-7916

Telephone: (608) 266-1631
 Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #38: 4610-06-71, WISC 2015 295
Village of Sister Bay
Country Walk Drive – Scandia Road
STH 42
Door County

Letting of May 12, 2015

This is Addendum No. 2, which provides for the following:

Special Provisions

Revised Special Provisions	
Article No.	Description
80	Concrete Curb and Gutter, Cold Weather Covering, Plastic 1 Layer, Item SPV.0090.16; Plastic 2 Layers, Item SPV.0090.17; Plastic/Hay/Plastic or Blanket, Item SPV.0090.18

Added Special Provisions	
Article No.	Description
95	Concrete Sidewalk, Cold Weather Covering, Plastic 1 Layer, Item SPV.0165.07; Plastic 2 Layers, Item SPV.0165.08; Plastic/Hay/Plastic or Blanket, Item SPV.0165.09

Schedule of Items

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
455.0122	Asphaltic Material PG64-34	TON	98	104	104
455.0605	Tack Coat	GAL	490	477	477
460.1101	HMA Pavement Type E-1	TON	1736	1817	1817
465.0120	Asphaltic Surface Driveways and Field Entrances	TON	231	286	286

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
SPV.0165.07	Concrete Sidewalk, Cold Weather Covering, Plastic 1 Layer	SF	0	11,139	11,139
SPV.0165.08	Concrete Sidewalk, Cold Weather Covering, Plastic 2 Layers	SF	0	5,569	5,569
SPV.0165.09	Concrete Sidewalk, Cold Weather Covering, Plastic/Hay/Plastic or Blanket	SF	0	5,569	5,569

Plan Sheets

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
199	Parking Lot – Site plan (revised thicknesses of asphalt layers)
213	Miscellaneous Quantities (revised STH 42 and Mill Rd lot materials, added Temp HMA remarks)
214	Miscellaneous Quantities (added concrete sidewalk, cold weather covering items)

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
 Proposal Management Section

ADDENDUM NO. 2

4610-06-71

May 7, 2015

Special Provisions

- 80. Concrete Curb and Gutter, Cold Weather Covering, Plastic 1 Layer, Item SPV.0090.16; Plastic 2 Layers, Item SPV.0090.17; Plastic/Hay/Plastic or Blanket, Item SPV.0090.18.**

Replace E Payment with the following:

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0090.16	Concrete Curb and Gutter, Cold Weather Covering, Plastic 1 Layer	LF
SPV.0090.17	Concrete Curb and Gutter, Cold Weather Covering, Plastic 2 Layers	LF
SPV.0090.18	Concrete Curb and Gutter, Cold Weather Covering, Plastic/Hay/Plastic or Blanket	LF

Payment is full compensation for supplying the plastic, hay, and material sufficient to weight down the insulating materials to withstand wind; and for furnishing all labor, tools, equipment, and incidentals required to place, remove, replace, and dispose of all covering materials as required during normal concreting operations. Heating of water or aggregates, or both, if deemed necessary by the contractor to maintain placement temperature, is incidental to this item.

- 95. Concrete Sidewalk, Cold Weather Covering, Plastic 1 Layer, Item SPV.0165.07; Plastic 2 Layers, Item SPV.0165.08; Plastic/Hay/Plastic or Blanket, Item SPV.0165.09.**

A Description

Place protective covering in accordance to standard spec 415.3.13, the plans, standard detail drawings, and as hereinafter provided.

B Materials

Furnish materials that meet the requirements specified in standard spec 415.3.13.2.

C (Vacant)

D Measurement

The department will measure Concrete Sidewalk Cold Weather Covering (Type) in area by the square foot, acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid items:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0165.07	Concrete Sidewalk, Cold Weather Covering, Plastic 1 Layer	SF
SPV.0165.08	Concrete Sidewalk, Cold Weather Covering, Plastic 2 Layers	SF

SPV.0165.09

Concrete Sidewalk, Cold Weather Covering,
Plastic/Hay/Plastic or Blanket

SF

Payment is full compensation for supplying the plastic, hay, and material sufficient to weight down the insulating materials to withstand wind; and for furnishing all labor, tools, equipment, and incidentals required to place, remove, replace, and dispose of all covering materials as required during normal concreting operations. Heating of water or aggregates, or both, if deemed necessary by the contractor to maintain placement temperature, is incidental to this item.

Schedule of Items

Attached, dated May 7, 2015, are the revised Schedule of Items Pages 5 and 23.

Plan Sheets

The following 8 ½ x 11-inch sheets are attached and made part of the plans for this proposal:
Revised: 199, 213, and 214

END OF ADDENDUM

Addendum No. 2
 ID 4610-06-71
 Revised Sheet 199
 May 7, 2015



BENCHMARK		RECORDED BY: AARON J. BREITENFELD	DATE: 05/07/15
NO.	DESCRIPTION	EL.	ACCURACY
1	TABULOT ON HYDRANT	990.03	
2	NAIL IN POWER POLE #9728/6U/9	990.73	

- LEGEND**
- CONCRETE PAVEMENT
 - ASPHALT PAVEMENT
 - REMOVE BRICK PAVERS
 - LANDSCAPE AREA
 - GREEN SPACE
 - PROPOSED 18" CURB & GUTTER (UNLESS OTHERWISE NOTED)
 - PROPOSED SHEDDING CURB & GUTTER
 - TRAFFIC FLOW ARROW
 - HANDICAPPED PARKING
 - INDICATES NUMBER OF PARKING SPACES

*NOTE: ALL CURB RADI AND DIMENSIONS ARE TO THE FACE OF CURB.

NOTE
 ALL AREAS DESIGNATED AS 'GREEN SPACE' OR 'LAWN' SHALL BE TOPSOILED TO A DEPTH OF 6 INCHES AND SODDED. AREA TO BE RAKED FREE OF STONES AND CLUMPS.

PARKING DATA
 TOTAL PARKING SPACES PROVIDED = 59 + 8 MOTORCYCLES
 HANDICAP ACCESSIBLE PARKING SPACES = 4

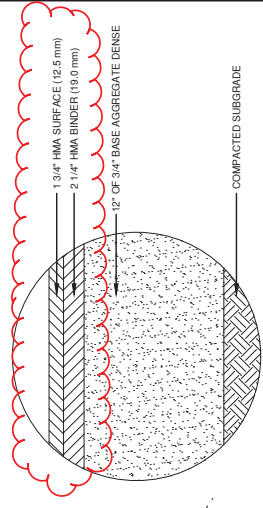

CONCRETE SURFACE DRAINS

STATION	LOCATION	CY	REMARKS
33+87, 28 RT	GATEWAY	1	
TOTAL			1

ASPHALTIC FLUMES

STATION	LOCATION	SY	REMARKS
20+25 RT	SISTER BLUFF DRIVE	4	
110+45 LT	SCANDIA ROAD	3	
TOTAL			7

HMA COLD WEATHER PAVING

ITEM 460.4000	TON	100
HMA COLD WEATHER PAVING		

CONCRETE PAVEMENT SUMMARY

STATION TO STATION	LOCATION	CY	REMARKS
600+00 - 603+00	STH 42	100	
603+00 - 607+07	STH 42	14	
613+07 - 619+87	STH 42	28	
619+87 - 640+86	STH 42	49	
TOTAL			192

STATION TO STATION	LOCATION	SY	REMARKS
600+00 - 603+00	STH 42	1640	
603+00 - 607+07	STH 42	1135	
613+07 - 619+87	STH 42	3080	
619+87 - 640+86	STH 42	10400	
TOTAL			15255

Includes all concrete, even side roads, within the station ranges

ASPHALTIC CONCRETE PAVEMENT SUMMARY

STATION TO STATION	LOCATION	TON	REMARKS
600+00 - 603+00	STH 42	2	
10+62 - 10+73	COUNTRY WALK DRIVE	3	
20+21 - 20+31	SISTER BLUFF DRIVE	6	
603+00 - 607+07	STH 42	12	
607+07 - 613+33	STH 42	13	
30+60 - 33+69	GATEWAY DRIVE	62	
50+60 - 53+19	STH 57	16	
53+19 - 57+31	STH 57	21	
40+88 - 41+67	BLUFFSIDE LANE	4	
613+33 - 619+87	STH 42	8	
60+63 - 60+89	MAPLE DRIVE	5	
70+43 - 70+88	CTH ZZ	15	
619+87 - 640+86	STH 42	2	
619+87 - 640+86	STH 42	2	
80+26 - 80+32	MILL ROAD (WEST)	4	
90+42 - 90+56	MILL ROAD (EAST)	3	
100+41 - 101+73	SUNSET DRIVE	32	
110+42 - 110+60	SCANDIA ROAD	4	
613+00 - 640+00	STH 42	160	
TOTAL			286

SPV.0180.04 TEMPORARY PAVEMENT

STATION TO STATION	LOCATION	SY	
612+40 - 617+20	STH 42 LT	640	
TOTAL			640

CULVERT PIPE LINER SUMMARY

STATION TO STATION	LOCATION	LF	EACH	REMARKS
630+77, 17 LT - 630+78, 151 LT	STH 42	134	1	
TOTAL			1	

Addendum No. 2
ID 4610-06-71
Revised Sheet 213
May 7, 2015

* CATEGORY 0020 ITEM

*** CATEGORY 0040 ITEM

COLD WEATHER COVERING

STATION TO STATION LOCATION	LF	SF	REMARKS
600+00 - 603+00 STH 42	---	---	CONCRETE CURB AND GUTTER
603+00 - 607+07 STH 42	143	71	SPV.0090.16 SPV.0090.17 SPV.0090.18 SPV.0165.07 SPV.0165.08 SPV.0165.09 SPV.0180.01 SPV.0180.02 SPV.0180.03
607+07 - 613+33 STH 42	325	163	PLASTIC PLASTIC/HAY/PLASTIC OR BLANKET
613+33 - 619+87 STH 42	324	162	PLASTIC PLASTIC/HAY/PLASTIC OR BLANKET
619+87 - 640+86 STH 42	1055	528	PLASTIC PLASTIC/HAY/PLASTIC OR BLANKET
TOTAL	1847	924	

CONCRETE SIDEWALK SUMMARY

STATION TO STATION LOCATION	SF	SF	REMARKS
600+00 - 603+00 STH 42	200	40	620.0405 602.0415 602.0515
603+00 - 607+07 STH 42	2090	16	CONCRETE CONCRETE CURB RAMP
607+07 - 613+33 STH 42	6280	64	CONCRETE CONCRETE CURB RAMP
613+33 - 619+87 STH 42	1572	---	DETECTABLE WARNING
50+60 - 53+19 STH 57	---	---	FIELD NATURAL PATINA
53+19 - 57+31 STH 57	2160	8	
613+33 - 619+87 STH 42	8154	56	
619+87 - 640+86 STH 42	22134	128	
TOTAL	42590	312	

CONCRETE STEPS

STATION TO STATION LOCATION	SF	REMARKS
616+10 STH 42	15	602.1500
616+24 STH 42	6	
627+81 STH 42	37	
TOTAL	58	

CONCRETE CORRUGATED MEDIAN

STATION TO STATION LOCATION	SF	REMARKS
636+66 - 636+79 STH 42 LT	230	620.0100
TOTAL	230	

CONCRETE CURB & GUTTER SUMMARY

STATION TO STATION LOCATION	LF	LF	LF	LF	LF	REMARKS
600+00 - 603+00 STH 42	---	---	562	21	---	
603+00 - 607+07 STH 42	---	496	321	---	---	
607+07 - 613+33 STH 42	4	230	908	---	85	
30+60 - 33+69 GATEWAY DRIVE	---	---	---	---	618	
50+60 - 53+26 STH 57	---	---	---	127	425	
53+26 - 57+31 STH 57	---	---	---	---	416	
40+88 - 41+67 BLUFFSIDE LANE	73	---	---	---	---	
613-33 - 619+87 STH 42	19	1024	251	---	34	
60+63 - 60+75 MAPLE DRIVE	12	---	---	---	---	
70+43 - 70+88 CTH ZZ	---	---	---	10	46	
619+87 - 640+86 STH 42	---	3843	242	---	138	30-INCH - DRIVEWAY ENTRANCE
80+26 - 80+31 MILL ROAD (WEST)	---	---	---	---	---	
90+43 - 90+56 MILL ROAD (EAST)	---	---	---	---	---	
100+42 - 101+73 SUNSET DRIVE	110	---	---	---	---	
110+42 - 110+60 SCANDIA ROAD	---	---	---	---	---	
MILL ROAD PARKING LOT	---	---	600	---	---	
TOTAL	218	5593	2284	782	1505	257

Addendum No. 2
 ID 4610-06-71
 Revised Sheet 214
 May 7, 2015

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20150512038PROJECT(S):
4610-06-71FEDERAL ID(S):
WISC 2015295

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0440	416.1010 Concrete Surface Drains	1.000 CY
0450	440.4410.S Incentive IRI Ride	3,600.000 DOL	1.00000	.	3600.00	.
0460	455.0122 Asphaltic Material PG64-34	104.000 TON
0470	455.0605 Tack Coat	477.000 GAL
0480	460.1101 HMA Pavement Type E-1	1,817.000 TON
0490	460.2000 Incentive Density HMA Pavement	840.000 DOL	1.00000	.	840.00	.
0500	460.4000 HMA Cold Weather Paving	100.000 TON
0510	465.0120 Asphaltic Surface Driveways and Field Entrances	286.000 TON
0520	465.0125 Asphaltic Surface Temporary	2,654.000 TON
0530	465.0315 Asphaltic Flumes	7.000 SY
0540	520.8000 Concrete Collars for Pipe	6.000 EACH

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20150512038

PROJECT(S):
4610-06-71

FEDERAL ID(S):
WISC 2015295

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
2380	SPV.0165 Special 06. Stamped Concrete Sidewalk 4-Inch	4,215.000 SF
2390	SPV.0180 Special 01. Concrete Pavement, Cold Weather Covering, Plastic 1 Layer	4,439.000 SY
2400	SPV.0180 Special 02. Concrete Pavement, Cold Weather Covering, Plastic 2 Layers	2,219.000 SY
2410	SPV.0180 Special 03. Concrete Pavement, Cold Weather Covering, Plastic/Hay/Plastic or Blanket	2,219.000 SY
2420	SPV.0180 Special 04. Temporary Pavement	640.000 SY
2430	SPV.0165 Special 07. Concrete Sidewalk, Cold Weather Covering, Plastic 1 Layer	11,139.000 SF
2440	SPV.0165 Special 08. Concrete Sidewalk, Cold Weather Covering, Plastic 2 Layers	5,569.000 SF
2450	SPV.0165 Special 09. Concrete Sidewalk, Cold Weather Covering, Plastic/Hay/Plastic or Blanket	5,569.000 SF
	SECTION 0001 TOTAL				.	.
	TOTAL BID				.	.