RAILING NOT SHOWN FOR CLARITY CAULK ENTIRE LENGTH CAULK ENTIRE LENGTH THE STAINLESS STEEL WE'RE THE STAINLESS STEEL WE'RE THE STAINLESS STEEL 2" PROTRUSION BENT AT 30° EACH ROW. STAGER ROWS.

RAILING NOT SHOWN FOR CLARITY *** " X 1 *** (MIN.) CONCRETE *** CAULK ENTIRE LENGTH *** DETAIL A *** FLASHING STAINLESS *** STEEL *** DETAIL A

FLASHING DETAIL FOR NEW BRIDGES WITH OPEN RAILING

THE BID ITEM "FLASHING STAINLESS STEEL" SHALL INCLUDE PROVIDING AND INSTALLING THE STAINLESS STEEL FLASHING. CAULK, % "CONCRETE SCREWS AND CLEANING THE EBGE OF THE DECK PRIOR TO ATTACHMENT OF THE FLASHING.

DESIGNER NOTES

EDGE OF DECK FLASHING IS FOR OPEN RAIL BRIDGES AND MAY BE USED FOR REHABILITATION ON NEW CONSTRUCTION. CONTACT THE REGION BRIDGE MAINTENANCE ENGINEER FOR THE DECISION ON WHETHER OR NOT TO USE THE FLASHING ON NEW BRIDGES.

DETAIL 1 OR DETAIL 2, OR A COMBINATION OF THE TWO, MAY BE USED FOR REHABILITATION.

THE DESIGN ENGINEER SHALL PROVIDE CONCRETE SURFACE REPAIR DETAILS AS NEEDED. CONCEPTUAL DETAILS ARE SHOWN ON THIS STANDARD.

DO NOT USE FLASHING IF FREEBOARD IS LESS THAN 3" FOR A SLAB BRIDGE.

NOTES

THE BID ITEM "FLASHING STAINLESS STEEL" SHALL INCLUDE PROVIDING AND INSTALLING THE STAINLESS STEEL FLASHING, SILICONE CAULK AND 1/6" CONCRETE SCREWS.

FLASHING TO BE INSTALLED AFTER PROTECTIVE SURFACE TREATMENT APPLICATION.

CONCRETE SCREWS SHALL BE 410 STAINLESS STEEL.


EXTEND FLASHING TO B.F. OF ABUTMENT DIAPHRAGM.

TOP OF FLASHING TO BEGIN APPROX.1-INCH BELOW TOP OF DECK/SLAB SURFACE.

THE FLASHING IS TO BE A CONSTANT HEIGHT BASED ON THE THINNEST SLAB DEPTH OVER THE BRIDGE LENGTH.

PROVIDE 2" MINIMUM FLASHING OVERLAP, FASTEN WITH $\frac{1}{16}$ " X 2" (MIN.) CONCRETE SCREWS.

CAULK SHALL BE NON-STAINING, GRAY NON-BITUMINOUS JOINT SEALER.

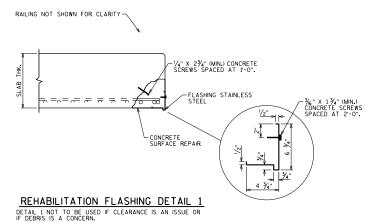

THE BID ITEM "FLASHING STAINLESS STEEL" SHALL INCLUDE PROVIDING AND INSTALLING THE STAINLESS STEEL FLASHING AND CONCRETE SCREWS, INCLUDING THE '/4" SCREWS USED TO SECURE THE CONCRETE SURFACE REPAIR.

RAILING NOT SHOWN FOR CLARITY //4 " X 2 2/4" (MIN.) CONCRETE SCHEWS SPACED AT 1'-0". CAULK ENTIRE LENGTH FLASHING STAINLESS STEEL SCREWS SPACED AT 1'-0" EACH ROW. STAGGER ROWS. DEFINE WITH 1/2" SAWCUT 2" PROTRUSION BENT AT 30" CONCRETE SURFACE REPAIR

REHABILITATION FLASHING DETAIL 2

THE BID ITEM "FLASHING STAINLESS STEEL" SHALL INCLUDE PROVIDING AND INSTALLING THE STAINLESS STEEL FLASHING, CAULK, % " AND 1/4" CONCRETE SCREWS, AND CLEANING THE EDGE OF THE DECK PRIOR TO ATTACHMENT OF THE FLASHING.

EDGE OF DECK FLASHING



APPROVED: Laura Shadewald

STANDARD 17.03