



Wisconsin Department of Transportation

May 4, 2017

Division of Transportation Systems Development

Bureau of Project Development
4802 Sheboygan Avenue, Rm 601
P O Box 7916
Madison, WI 53707-7916

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #33: 6220-03-74, WISC 2017 287
Waupaca – New London
E Jct STH 22 to Royalton Overhead
STH 54
Waupaca County

Letting of May 9, 2017

This is Addendum No. 01, which provides for the following:

Schedule of Items

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
210.2100	Backfill Structure Type B – change to **P**	CY	736	736	736

This bid item is being changed to Pay Plan Quantity. There are no changes in quantity.

Plan Sheets

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
10	Construction Details (Structure B-68-140 Transition Detail - revised note changing Excavation for Structures to Structure Backfill Type B)

Schedule of Items

Attached, dated May 4, 2017, are the revised Schedule of Items Page 1.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 10.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.


Sincerely,

Mike Coleman


Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

Addendum No. 01
ID 6220-03-74
Revised Sheet 10
May 4, 2017

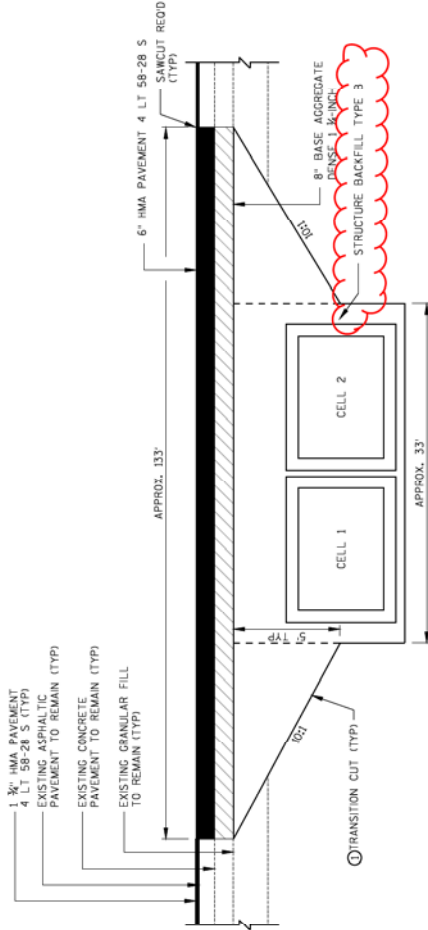

STRUCTURE B-68-HO TRANSITION
STA 521+58 TO STA 522+91
INV 785.00 (N) INV 785.22 (S)

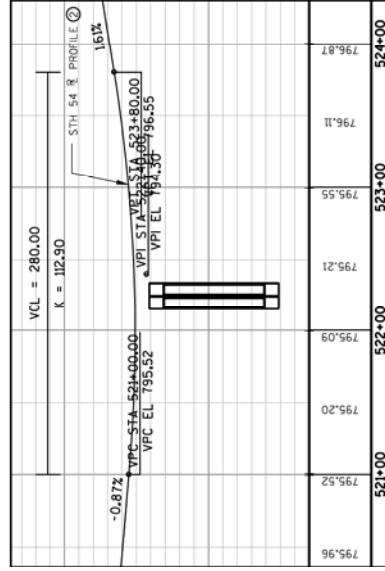

STH 54 PROFILE

- NOTES
SEE B-68-HO STRUCTURE PLANS FOR ADDITIONAL DETAILS.
- ① TRANSITION CUT WILL BE PAID FOR AS COMMON EXCAVATION. TRANSITION CUT SHALL BE SHOULDER POINT TO SHOULDER POINT. BACKFILL TRANSITION CUT WITH BACKFILL STRUCTURE TYPE B.
 - ② PROFILE AS SHOWN FOR STH 54 REFERENCE LINE REPRESENTS BEST FIT TO EXISTING CONDITIONS. CONSTRUCTION OF STRUCTURE B-68-HO SHALL BE IN THE DRY. SEE SPECIAL PROVISIONS.



Proposal Schedule of Items

Proposal ID: 20170509033 Project(s): 6220-03-74

Federal ID(s): WISC 2017287

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0010	201.0105 Clearing	2.000 STA	_____.	_____.
0020	201.0205 Grubbing	3.000 STA	_____.	_____.
0030	201.0220 Grubbing	40.000 ID	_____.	_____.
0040	203.0100 Removing Small Pipe Culverts	3.000 EACH	_____.	_____.
0050	203.0200 Removing Old Structure (station) 01. 509+58	LS	LUMP SUM	_____.
0060	203.0200 Removing Old Structure (station) 02. 522+07	LS	LUMP SUM	_____.
0070	204.0100 Removing Pavement	1,525.000 SY	_____.	_____.
0080	204.0110 Removing Asphaltic Surface	158.000 SY	_____.	_____.
0090	204.0120 Removing Asphaltic Surface Milling	79,584.000 SY	_____.	_____.
0100	204.0150 Removing Curb & Gutter	478.000 LF	_____.	_____.
0110	204.0155 Removing Concrete Sidewalk	197.000 SY	_____.	_____.
0120	204.0165 Removing Guardrail	762.000 LF	_____.	_____.
0130	204.0190 Removing Surface Drains	3.000 EACH	_____.	_____.
0140	205.0100 Excavation Common	1,085.000 CY	_____.	_____.
0150	206.2000 Excavation for Structures Culverts (structure) 01. B-68-140	LS	LUMP SUM	_____.
0160	210.2100 Backfill Structure Type B **P**	736.000 CY	_____.	_____.