



Wisconsin Department of Transportation

April 27, 2017

Division of Transportation Systems Development

Bureau of Project Development
 4802 Sheboygan Avenue, Rm 601
 P O Box 7916
 Madison, WI 53707-7916

Telephone: (608) 266-1631
 Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #36: 9010-03-60, WISC 2017 290
Wausau - Aniwa
Elm Rd – USH 45
STH 52
Marathon County

Letting of May 9, 2017

This is Addendum No. 01, which provides for the following:

Schedule of Items

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
460.5224	HMA Pavement 4LT 58-28S	Ton	0	16,895	16,895

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
460.5223	HMA Pavement 3LT 58-28S	Ton	16,895	-16,895	0

Plan Sheets

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
5	Construction Detail 1 ¾ Mill and Overlay (Changed the 3LT 58-28S to 4 LT 58-28S)
7	Construction Detail, Butt Joints (Changed the 3LT 58-28S to 4 LT 58-28S)
8	Construction Detail, Transitions (Changed the 3LT 58-28S to 4 LT 58-28S)
35	Misc Quantities, Paving (Changed the 3LT 58-28S to 4 LT 58-28S)

Schedule of Items

Attached, dated April 27, 2017, are the revised Schedule of Items Pages 1 – 5.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 5, 7, 8, and 35.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.


Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

Addendum No. 01
 ID 9010-03-60
 Revised Sheet 5
 April 27, 2017

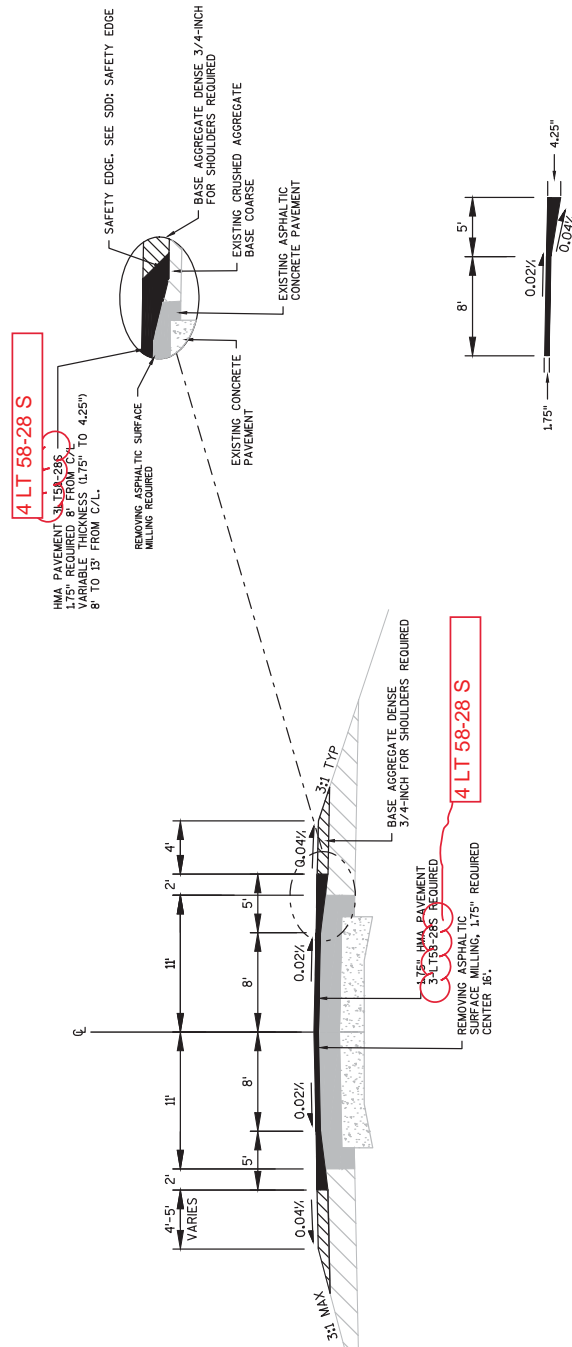

1. 3/4" MILL AND OVERLAY WITH SHOULDER WEDGE


STA 120+08 - STA 585+43
 STH 52

- LEGEND
- EXISTING ASPHALTIC PAVEMENT
 - EXISTING CONCRETE PAVEMENT
 - EXISTING CRUSHED AGGREGATE BASE COARSE
 - HMA PAVEMENT 3.5" THICK
 - BASE AGGREGATE DENSE 3/4-INCH FOR SHOULDERS

4 LT 58-28 S

PROPOSED TYPICAL SECTION

PROJECT NO: 9010-03-60	HWY: STH 52	COUNTY: MARATHON/SHAWANO	PLAN: ALTERNATIVE SECTIONS	SHEET 5	E
FILE NAME : N:\NPOS\C30\90100330\SHEETS\PLAN\02301.TS.DWG					
PLOT DATE : 2/23/2017 1:51 PM					
PLOT BY : GETTINGER, JEFFERY W/PLOT NAME :					
PLOT SCALE : 1 IN:10 FT					
WISDOT/CADD SHEET 42					

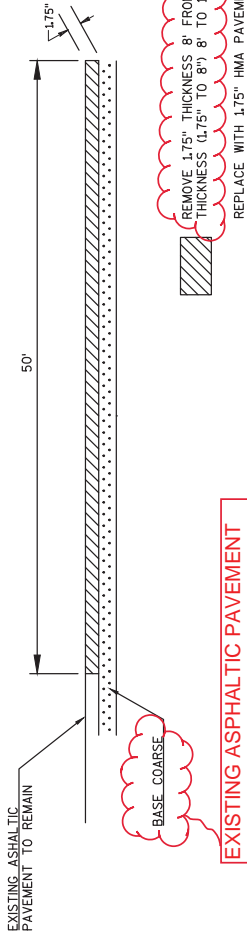

REMOVE 1.75" THICKNESS FOR CENTER 16'
AND VARIABLE THICKNESS (1.75 - 4.25" FROM
8' TO 13 FEET FROM C/L


REMOVE 1.75" THICKNESS 8' FROM C/L-VARIABLE
THICKNESS (1.75" TO 8") 8' TO 13' FROM C/L.
REPLACE WITH 1.75" HMA PAVEMENT 3L158-28S.

4 LT 52-28 S

REMOVING ASPHALTIC SURFACE BUTT JOINTS, (MAINLINE DETAIL)


- STA 120+08
- STA 158+93
- STA 160+36
- STA 204+58
- STA 206+05
- STA 584+93

Addendum No. 01
ID 9010-03-60
Revised Sheet 7
April 27, 2017

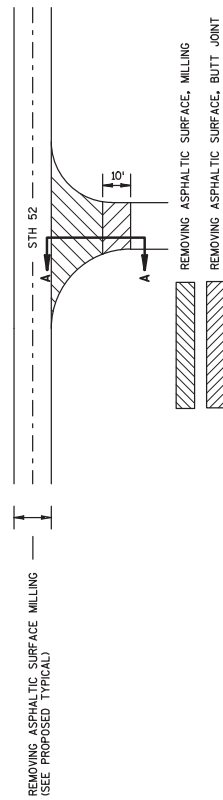


NOTE: EXACT DIMENSIONS AND LOCATIONS TO BE
DETERMINED BY THE ENGINEER IN THE FIELD.

BUTT JOINT DETAIL
SIDE ROADS WITHOUT CURB AND GUTTER
AND DRIVEWAYS

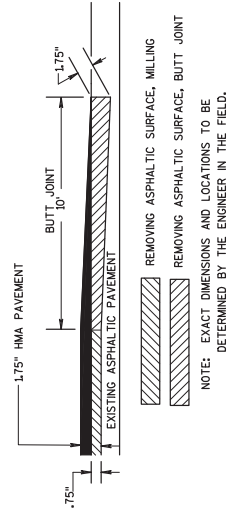


NOTE: EXACT DIMENSIONS AND LOCATIONS TO BE
DETERMINED BY THE ENGINEER IN THE FIELD.

SECTION A-A

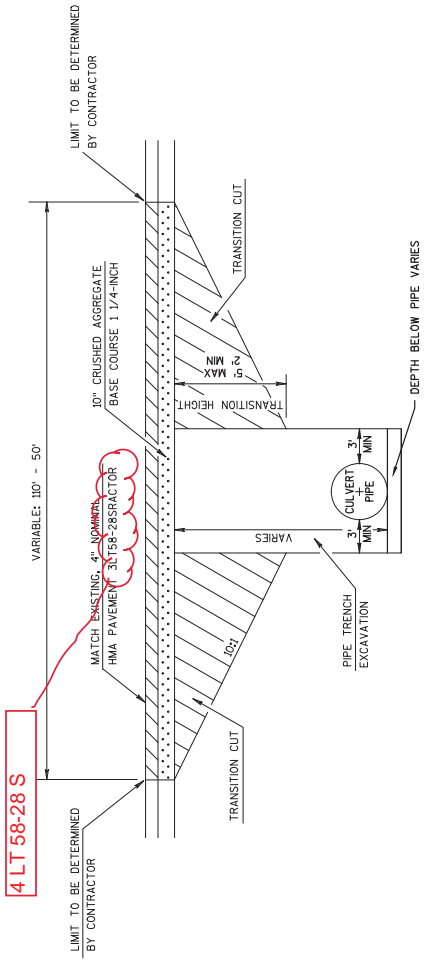

CULVERT PIPE TRANSITION

- STA 217+25 - STA 218+75
- STA 219+50 - STA 221+00
- STA 277+75 - STA 279+25
- STA 314+75 - STA 316+50
- STA 459+50 - STA 461+25
- STA 466+25 - STA 467+75
- STA 524+25 - STA 526+00
- STA 605+25 - STA 607+00
- STA 659+50 - STA 661+50

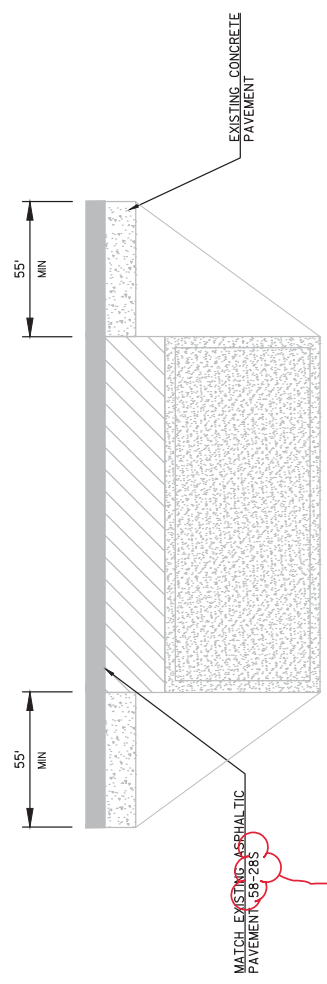

BOX CULVERT PIPE TRANSITION

- STA 382+90 - STA 384+10
- STA 395+90 - STA 401+10
- STA 479+55 - STA 480+60

Addendum No. 01
ID 9010-03-60
Revised Sheet 8
April 27, 2017

4 LT 58-28 S

4 LT 58-28 S



Proposal Schedule of Items

Proposal ID: 20170509036 Project(s): 9010-03-60

Federal ID(s): WISC 2017290

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0010	203.0100 Removing Small Pipe Culverts	10.000 EACH	_____.	_____.
0020	204.0115 Removing Asphaltic Surface Butt Joints	2,414.000 SY	_____.	_____.
0030	204.0120 Removing Asphaltic Surface Milling	134,440.000 SY	_____.	_____.
0040	204.0180 Removing Delineators and Markers	18.000 EACH	_____.	_____.
0050	211.0100 Prepare Foundation for Asphaltic Paving (project) 01. 9010-03-60	LS	LUMP SUM	_____.
0060	213.0100 Finishing Roadway (project) 01. 9010-03-60	1.000 EACH	_____.	_____.
0070	305.0110 Base Aggregate Dense 3/4-Inch	3,351.000 TON	_____.	_____.
0080	305.0120 Base Aggregate Dense 1 1/4-Inch	2,834.000 TON	_____.	_____.
0090	305.0500 Shaping Shoulders	930.000 STA	_____.	_____.
0100	440.4410 Incentive IRI Ride	35,200.000 DOL	1.00000	35,200.00
0110	455.0605 Tack Coat	9,410.000 GAL	_____.	_____.
0120	460.2000 Incentive Density HMA Pavement	10,815.000 DOL	1.00000	10,815.00
0140	465.0105 Asphaltic Surface	1,000.000 TON	_____.	_____.
0150	465.0110 Asphaltic Surface Patching	200.000 TON	_____.	_____.
0160	465.0120 Asphaltic Surface Driveways and Field Entrances	200.000 TON	_____.	_____.
0170	522.0324 Culvert Pipe Reinforced Concrete Class IV 24-Inch	336.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20170509036 Project(s): 9010-03-60

Federal ID(s): WISC 2017290

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0180	522.0330 Culvert Pipe Reinforced Concrete Class IV 30-Inch	50.000 LF	_____.	_____.
0190	522.0348 Culvert Pipe Reinforced Concrete Class IV 48-Inch	50.000 LF	_____.	_____.
0200	522.1024 Apron Endwalls for Culvert Pipe Reinforced Concrete 24-Inch	14.000 EACH	_____.	_____.
0210	522.1030 Apron Endwalls for Culvert Pipe Reinforced Concrete 30-Inch	2.000 EACH	_____.	_____.
0220	522.1048 Apron Endwalls for Culvert Pipe Reinforced Concrete 48-Inch	2.000 EACH	_____.	_____.
0230	606.0200 Riprap Medium	38.000 CY	_____.	_____.
0240	618.0100 Maintenance And Repair of Haul Roads (project) 01. 9010-03-60	1.000 EACH	_____.	_____.
0250	619.1000 Mobilization	1.000 EACH	_____.	_____.
0260	624.0100 Water	64.000 MGAL	_____.	_____.
0270	625.0100 Topsoil	4,159.000 SY	_____.	_____.
0280	627.0200 Mulching	5,159.000 SY	_____.	_____.
0290	628.1504 Silt Fence	3,417.000 LF	_____.	_____.
0300	628.1520 Silt Fence Maintenance	835.000 LF	_____.	_____.
0310	628.1905 Mobilizations Erosion Control	5.000 EACH	_____.	_____.
0320	628.1910 Mobilizations Emergency Erosion Control	2.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20170509036 Project(s): 9010-03-60

Federal ID(s): WISC 2017290

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0330	628.2008 Erosion Mat Urban Class I Type B	350.000 SY	_____.	_____.
0340	628.7504 Temporary Ditch Checks	600.000 LF	_____.	_____.
0350	628.7555 Culvert Pipe Checks	39.000 EACH	_____.	_____.
0360	628.7570 Rock Bags	50.000 EACH	_____.	_____.
0370	629.0210 Fertilizer Type B	4.000 CWT	_____.	_____.
0380	630.0130 Seeding Mixture No. 30	200.000 LB	_____.	_____.
0390	633.5200 Markers Culvert End	50.000 EACH	_____.	_____.
0400	634.0616 Posts Wood 4x6-Inch X 16-FT	180.000 EACH	_____.	_____.
0410	637.2210 Signs Type II Reflective H	503.260 SF	_____.	_____.
0420	637.2230 Signs Type II Reflective F	567.140 SF	_____.	_____.
0430	638.2602 Removing Signs Type II	220.000 EACH	_____.	_____.
0440	638.3000 Removing Small Sign Supports	203.000 EACH	_____.	_____.
0450	642.5201 Field Office Type C	1.000 EACH	_____.	_____.
0460	643.0100 Traffic Control (project) 01. 9010-03-60	1.000 EACH	_____.	_____.
0470	643.0300 Traffic Control Drums	1,310.000 DAY	_____.	_____.
0480	643.0310.S Temporary Portable Rumble Strips	1.000 LS	_____.	_____.
0490	643.0900 Traffic Control Signs	1,845.000 DAY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20170509036 Project(s): 9010-03-60

Federal ID(s): WISC 2017290

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0500	643.1050 Traffic Control Signs PCMS	90.000 DAY	_____.	_____.
0510	645.0120 Geotextile Type HR	69.000 SY	_____.	_____.
0520	646.0106 Pavement Marking Epoxy 4-Inch	93,978.000 LF	_____.	_____.
0530	646.0406 Pavement Marking Same Day Epoxy 4-Inch	44,568.000 LF	_____.	_____.
0540	646.2304.S Pavement Marking Grooved Wet Reflective Epoxy 4-Inch	93,000.000 LF	_____.	_____.
0550	648.0100 Locating No-Passing Zones	14.000 MI	_____.	_____.
0560	649.0402 Temporary Pavement Marking Paint 4-Inch	75,556.000 LF	_____.	_____.
0570	649.2102 Temporary Raised Pavement Markers Type II	4,505.000 EACH	_____.	_____.
0580	650.6000 Construction Staking Pipe Culverts	9.000 EACH	_____.	_____.
0590	650.8000 Construction Staking Resurfacing Reference	73,900.000 LF	_____.	_____.
0600	650.9920 Construction Staking Slope Stakes	3,000.000 LF	_____.	_____.
0610	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	1,200.000 HRS	5.00000	6,000.00
0620	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	600.000 HRS	5.00000	3,000.00
0630	SPV.0060 Special 01. Lane Shift	9.000 EACH	_____.	_____.
0640	SPV.0060 Special 02. Culvert Pipe Transitions	12.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20170509036 Project(s): 9010-03-60

Federal ID(s): WISC 2017290

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0650	SPV.0090 Special 01. Heavy Duty Silt Fence	50.000 LF	_____.	_____.
0660	SPV.0090 Special 02. Ditch Cleaning	1,100.000 LF	_____.	_____.
0670	SPV.0105 Special 01. Temporary Pumping, Pipe 37-052-030	LS	LUMP SUM	_____.
0680	SPV.0125 Special 01. Prepare Pavement for Seal Coat	5.140 MI	_____.	_____.
0690	SPV.0180 Special 01. Seal Coat	78,505.000 SY	_____.	_____.
0700	460.5224 HMA Pavement 4 LT 58-28 S	16,895.000 TON	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.

