


ARRANGEMENT AT  $\bar{C}$  SPAN FOR GIRDERS WITH DRAPED 0.5" DIA. STRANDS

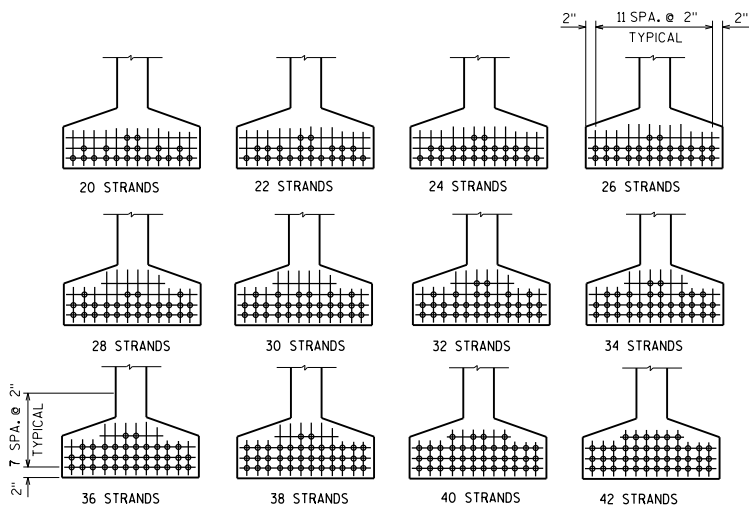

ARRANGEMENT AT  $\bar{C}$  SPAN FOR GIRDERS WITH DRAPED 0.6" DIA. STRANDS

(COMPRESSION IS NEGATIVE)

N NO. STRANDS	(1) $e_s$ 0.5" DIA. STRANDS (inches)	(2) $(1 + \frac{e_s y_B}{r^2})$ 0.5" DIA. STRANDS	(3) $(A/(2))$ 0.5" DIA. STRANDS (sq. in.)	(4) $P(\text{ini.}) = A_s f_s$ 0.5" DIA. STRANDS (KIPS)	(5) $f_b (\text{ini.}) = (4)/(3)$ 0.5" DIA. STRANDS (K/Sq. In.)
20	-31.62	2.659	291.090	620	2.130
22	-31.53	2.655	291.530	682	2.339
24	-31.45	2.650	292.080	744	2.547
26	-31.39	2.647	292.410	806	2.756
28	-31.05	2.629	294.410	868	2.948
30	-30.89	2.621	295.310	930	3.149
32	-30.75	2.614	296.100	992	3.350
34	-30.62	2.607	296.890	1054	3.550
36	-30.51	2.601	297.580	1116	3.750
38	-30.41	2.596	298.150	1178	3.951
40	-30.12	2.581	299.880	1240	4.135
42	-29.95	2.572	300.930	1302	4.327
44	-29.80	2.564	301.870	1364	4.519
46	-29.49	2.548	303.770	1426	4.694

STANDARD PATTERNS - 0.5" DIA. DRAPED STRANDS

**70" GIRDER**

$A = 774 \text{ SQ. IN.}$

$r^2 = 659.70 \text{ IN.}^2$

$y_T = 35.38 \text{ IN.}$

$y_B = -34.62 \text{ IN.}$

$I = 510,613 \text{ IN.}^4$

$S_T = 14,430 \text{ IN.}^3$

$S_B = -14,750 \text{ IN.}^3$

WT. = 0.806 KIPS/FT. +  
6.6 KIPS FOR BOTH END BLOCKS

(COMPRESSION IS NEGATIVE)

N NO. STRANDS	(1) $e_s$ 0.6" DIA. STRANDS (inches)	(2) $(1 + \frac{e_s y_B}{r^2})$ 0.6" DIA. STRANDS	(3) $(A/(2))$ 0.6" DIA. STRANDS (sq. in.)	(4) $P(\text{ini.}) = A_s f_s$ 0.6" DIA. STRANDS (KIPS)	(5) $f_b (\text{ini.}) = (4)/(3)$ 0.6" DIA. STRANDS (K/Sq. In.)
20	-31.62	2.659	291.090	879	3.020
22	-31.53	2.655	291.530	967	3.317
24	-31.45	2.650	292.080	1055	3.612
26	-31.39	2.647	292.410	1143	3.909
28	-31.19	2.637	293.520	1230	4.191
30	-31.02	2.628	294.520	1318	4.475
32	-30.74	2.614	296.100	1406	4.748
34	-30.62	2.607	296.890	1494	5.032
36	-30.51	2.601	297.580	1582	5.316
38	-30.41	2.596	298.150	1670	5.601
40	-30.22	2.586	299.300	1758	5.874
42	-30.05	2.577	300.350	1846	6.146

STANDARD PATTERNS - 0.6" DIA. DRAPED STRANDS

**PRE-TENSION**

$f_s^i = 270,000 \text{ P.S.I.}$


$f_s = 0.75 \times 270,000 = 202,500 \text{ P.S.I.}$   
for low relaxation strands

Pi PER 0.5" DIA. STRAND  
= 0.1531 X 202,500 = 31.00 KIPS

Pi PER 0.6" DIA. STRAND  
= 0.217 X 202,500 = 43.94 KIPS

$\frac{y_B}{r^2} = \frac{-34.62}{659.70} = -0.05248 \text{ IN./IN.}^2$

**70" PRESTRESSED GIRDER DESIGN DATA**



**BUREAU OF  
STRUCTURES**

DATE:  
7-16

APPROVED: Laura Shadewald