

Wisconsin Department of Transportation

June 1, 2017

Division of Transportation Systems Development

Bureau of Project Development
4802 Sheboygan Avenue, Rm 601
P O Box 7916
Madison, WI 53707-7916

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #25: 5735-04-60
Sparta - Tomah
Hazel West Rd to Hollister Ave
STH 16
Monroe County

Letting of June 13, 2017

This is Addendum No. 01, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
3	Prosecution and Progress

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
649.0402	Temporary Pavement Marking Paint 4-inch	LF	73,428	-36,714	36,714

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
649.0403	Temporary Pavement Marking Epoxy 4-inch	LF	0	36,714	36,714

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
20	Miscellaneous Quantities (Added item and revised quantities)

Added Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of why sheet was added)
4A	Removing Distressed Pavement Milling (To clarify bid item)

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01

5735-04-60

June 1, 2017

Special Provisions

3. Prosecution and Progress

Add the following after the last paragraph:

Northern Long-eared Bat (*Myotis septentrionalis*)

Northern Long-eared Bats (NLEB) have the potential to inhabit the project limits because they roost in trees. Roosts may not have been observed on this project, but conditions to support the species exist. The species and all active roosts are protected by the Federal Endangered Species Act. If an individual bat or active roost is encountered during construction operations, stop work and notify the engineer and the WisDOT Regional Environmental Coordinator (REC).

If additional construction activities beyond what was originally specified are required to complete the work, approval from the engineer, following coordination with WisDOT REC, is required prior to initiating these activities.

Do not park or store any equipment or materials within 30 feet of the edge of the lane unless approved by the engineer.

Rusty Patched Bumble Bee (*Bombus affinis*)

The rusty patched bumble bee (*Bombus affinis*) was listed as endangered by the U.S. Fish and Wildlife Service (USFWS) under the Endangered Species Act, effective March 21, 2017. Construction activities such as grading outside the mowed shoulder area have the potential to impact ground nests and wildflowers that may serve as a food source for the bee. If an active rusty-patched bumblebee nest is encountered in construction areas, contact the WisDOT Regional Environmental Coordinator, who will coordinate with USFWS.

Schedule of Items

Attached, dated June 1, 2017, are the revised Schedule of Items Pages 1 – 3.

Plan Sheets



The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: Sheet 20.


Added: Sheet 4A

END OF ADDENDUM

Addendum No. 01
ID 5735-04-60
Added Sheet 4A
June 1, 2017

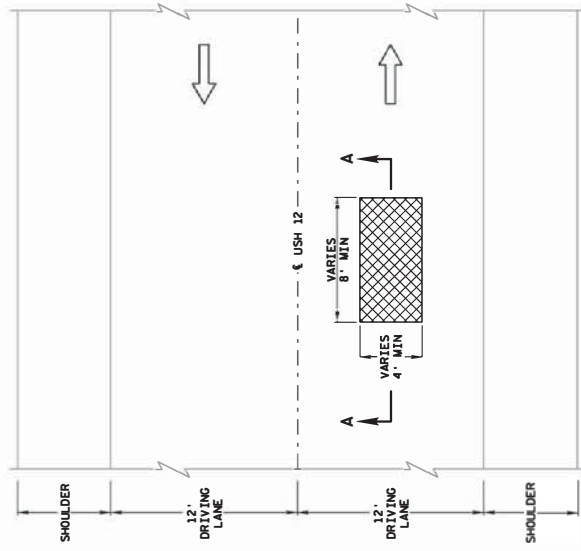

PLAN VIEW

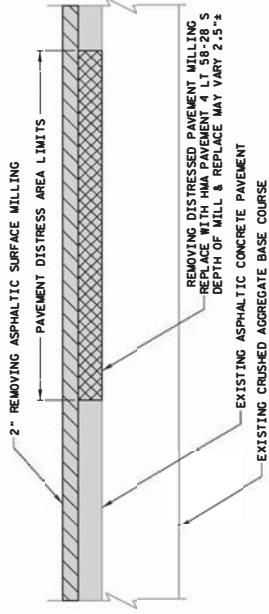

SECTION AA

REMOVING DISTRESSED PAVEMENT MILLING

PAVEMENT MARKING EPOXY 4-INCH

STATION	TO	STATION	LOCATION	646.0106		WHITE
				SOLID YL	DASH YL	
169+50	-	183+50	C/L	950	350	
183+50	-	193+00	C/L	237.5	237.5	
193+00	-	194+00	C/L	25	25	
194+00	-	206+00	C/L	1200	300	
206+00	-	207+00	C/L	25	25	
207+00	-	243+50	C/L	4550	687.5	
243+50	-	253+00	C/L	7350	237.5	
253+00	-	302+50	C/L	7350	637.5	
302+50	-	317+00	C/L	5850	362.5	
317+00	-	362+00	C/L	5850	1037.5	
362+00	-	363+50	C/L	1150	37.5	
363+50	-	375+00	C/L	1150	287.5	
375+00	-	406+50	C/L	10200	787.5	
406+50	-	490+00	C/L	10200	1625.0	
490+00	-	507+00	C/L	3100	425.0	
507+00	-	529+00	C/L	3100	325.0	
169+50	-	529+00	EDGE LINE			71900
515+51	-	517+64	LANE LINE			62.5
			SUBTOTAL	34350	7388	71963
			TOTAL 0010			113700

PAVEMENT MARKING TEMPORARY

STATION	TO	STATION	LOCATION	649.0402		649.0403	
				SOLID YL	DASH YL	SOLID YL	DASH YL
169+50	-	183+50	C/L	950	112	950	112
183+50	-	193+00	C/L	1200	76	950	76
193+00	-	194+00	C/L	1200	8	1200	8
194+00	-	206+00	C/L	4550	96	1200	96
206+00	-	207+00	C/L	8	8	8	8
207+00	-	243+50	C/L	220	220	4550	220
243+50	-	253+00	C/L	76	76	7350	76
253+00	-	302+50	C/L	204	204	7350	204
302+50	-	317+00	C/L	116	116	5850	116
317+00	-	362+00	C/L	332	332	5850	332
362+00	-	363+50	C/L	12	12	1150	12
363+50	-	375+00	C/L	92	92	1150	92
375+00	-	406+50	C/L	252	252	10200	252
406+50	-	490+00	C/L	520	520	10200	520
490+00	-	507+00	C/L	136	136	3100	136
507+00	-	529+00	C/L	104	104	3100	104
			SUB TOTAL	34350	2364	34350	2364
			TOTAL 0010	36714	36714	36714	36714

PAVEMENT MARKING EPOXY 8-INCH

STATION	TO	STATION	LOCATION	646.0126		REMARKS
				SOLID YL	DASH YL	
261+33	-	262+42	RT	109		Heilloom
517+45	-	519+74	LT	229		CTH CM
519+74	-	520+92	LT	30		3' SKIPS
			TOTAL 0010	368		

Addendum No. 01
 ID 5735-04-60
 Revised Sheet 20
 June 1, 2017



Proposal Schedule of Items

Proposal ID: 20170613025 Project(s): 5735-04-60

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0010	204.0110 Removing Asphaltic Surface	1,919.000 SY	_____.	_____.
0020	204.0120 Removing Asphaltic Surface Milling	125,371.000 SY	_____.	_____.
0030	213.0100 Finishing Roadway (project) 01. 5735-04-60	1.000 EACH	_____.	_____.
0040	305.0110 Base Aggregate Dense 3/4-Inch	8,681.000 TON	_____.	_____.
0050	305.0500 Shaping Shoulders	720.000 STA	_____.	_____.
0060	440.4410 Incentive IRI Ride	27,240.000 DOL	1.00000	27,240.00
0070	450.4000 HMA Cold Weather Paving	4,000.000 TON	_____.	_____.
0080	455.0605 Tack Coat	8,772.000 GAL	_____.	_____.
0090	460.2000 Incentive Density HMA Pavement	10,140.000 DOL	1.00000	10,140.00
0100	460.4110.S Reheating HMA Pavement Longitudinal Joints	35,909.000 LF	_____.	_____.
0110	460.5224 HMA Pavement 4 LT 58-28 S	16,126.000 TON	_____.	_____.
0120	465.0120 Asphaltic Surface Driveways and Field Entrances	100.000 TON	_____.	_____.
0130	465.0425 Asphaltic Shoulder Rumble Strips 2-Lane Rural	60,105.000 LF	_____.	_____.
0140	465.0475 Asphalt Center Line Rumble Strips 2-Lane Rural	29,565.000 LF	_____.	_____.
0150	614.0200 Steel Thrie Beam Structure Approach	41.200 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20170613025 Project(s): 5735-04-60

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0160	614.0370 Steel Plate Beam Guard Energy Absorbing Terminal	2.000 EACH	_____.	_____.
0170	614.0920 Salvaged Rail	4,966.000 LF	_____.	_____.
0180	614.2300 MGS Guardrail 3	3,525.000 LF	_____.	_____.
0190	614.2500 MGS Thrie Beam Transition	236.400 LF	_____.	_____.
0200	614.2610 MGS Guardrail Terminal EAT	26.000 EACH	_____.	_____.
0210	618.0100 Maintenance And Repair of Haul Roads (project) 01. 5735-04-60	1.000 EACH	_____.	_____.
0220	619.1000 Mobilization	1.000 EACH	_____.	_____.
0230	624.0100 Water	17.000 MGAL	_____.	_____.
0240	642.5201 Field Office Type C	1.000 EACH	_____.	_____.
0250	643.0100 Traffic Control (project) 01. 5735-04-60	1.000 EACH	_____.	_____.
0260	643.0300 Traffic Control Drums	9,000.000 DAY	_____.	_____.
0270	643.0900 Traffic Control Signs	1,125.000 DAY	_____.	_____.
0280	643.1050 Traffic Control Signs PCMS	14.000 DAY	_____.	_____.
0290	646.0106 Pavement Marking Epoxy 4-Inch	113,700.000 LF	_____.	_____.
0300	646.0126 Pavement Marking Epoxy 8-Inch	368.000 LF	_____.	_____.
0310	649.0402 Temporary Pavement Marking Paint 4-Inch	36,714.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20170613025 Project(s): 5735-04-60

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0320	650.8000 Construction Staking Resurfacing Reference	35,950.000 LF	_____.	_____.
0330	690.0150 Sawing Asphalt	751.000 LF	_____.	_____.
0340	SPV.0180 Special 01. Removing Distressed Pavement Milling	2,400.000 SY	_____.	_____.
0350	649.0403 Temporary Pavement Marking Epoxy 4-Inch	36,714.000 LF	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.