

Wisconsin Department of Transportation

Division of Transportation Systems Development

Bureau of Project Development
4802 Sheboygan Avenue, Rm 601
P O Box 7916
Madison, WI 53707-7916

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

May 23, 2017

NOTICE TO ALL CONTRACTORS:

Proposal #26: 5880-03-63
Mauston – Wisconsin Dells
Water Street to Honeyair Street
USH 12
Juneau County

Letting of June 13, 2017

This is Addendum No. 01, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
3	Prosecution and Progress

Schedule of Items:

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
649.0403	Temporary Pavement Marking Epoxy 4-inch	LF	0	106,418	106,418

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
649.0402	Temporary Pavement Marking Paint 4-inch	LF	106,418	-106,418	0

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
5	Construction Detail
32	Miscellaneous Quantities

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01

5880-03-63

May 23, 2017

Special Provisions

3. Prosecution and Progress

Add the following after the last paragraph:

Northern Long-eared Bat (*Myotis septentrionalis*)

Northern Long-eared Bats (NLEB) have the potential to inhabit the project limits because they roost in trees. Roosts may not have been observed on this project, but conditions to support the species exist. The species and all active roosts are protected by the Federal Endangered Species Act. If an individual bat or active roost is encountered during construction operations, stop work and notify the engineer and the WisDOT Regional Environmental Coordinator (REC).

If additional construction activities beyond what was originally specified are required to complete the work, approval from the engineer, following coordination with WisDOT REC, is required prior to initiating these activities.

Do not park or store any equipment or materials within 30 feet of the edge of the lane unless approved by the engineer.

Rusty Patched Bumble Bee (*Bombus affinis*)

The rusty patched bumble bee (*Bombus affinis*) was listed as endangered by the U.S. Fish and Wildlife Service (USFWS) under the Endangered Species Act, effective March 21, 2017. Construction activities such as grading outside the mowed shoulder area have the potential to impact ground nests and wildflowers that may serve as a food source for the bee. If an active rusty-patched bumblebee nest is encountered in construction areas, contact the WisDOT Regional Environmental Coordinator, who will coordinate with USFWS.

Paving Operations

The milled surface must be paved back in its entirety before concluding work each day.

Pavement Marking Operations

Perform pavement marking operations in the following order unless approved by the engineer:

- Locate No Passing Zones.
- Install Temporary Pavement Marking Epoxy 4-inch on the same day pavement is placed.
- Install Permanent Marking Epoxy 4-inch after the center line rumble strips are installed.

Beam Guard Replacement

Beam guard that is removed shall be replaced within seven (7) calendar days. Place traffic control drums when beam guard is out of service.

Schedule of Items


Attached, dated May 23, 2017, are the revised Schedule of Items Page 3.

Plan Sheets


The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 5 and 32.

END OF ADDENDUM

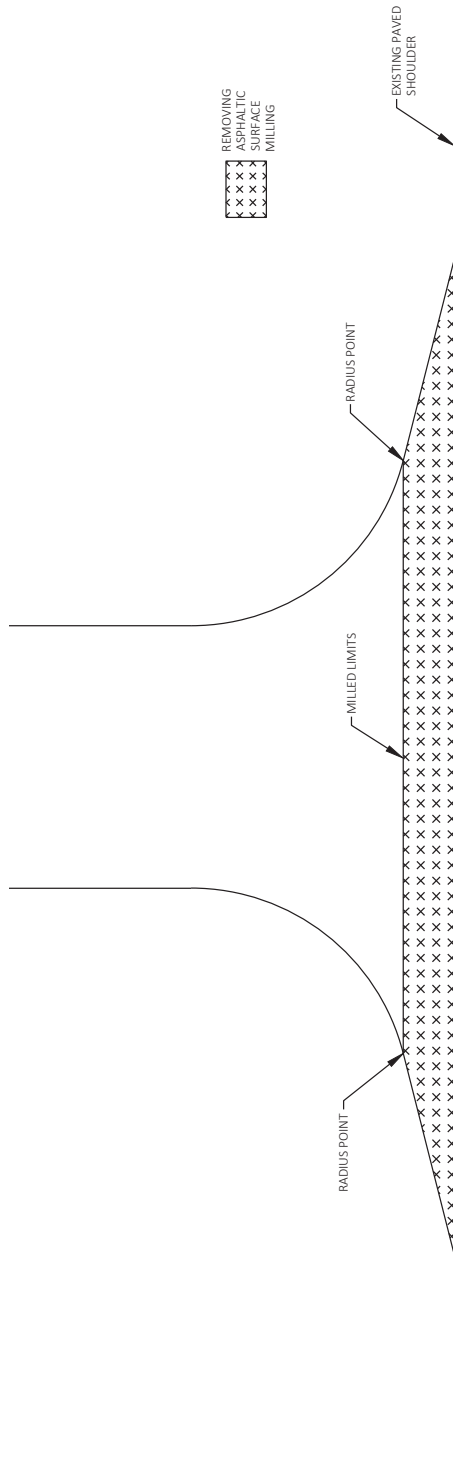

INTERSECTION DETAIL

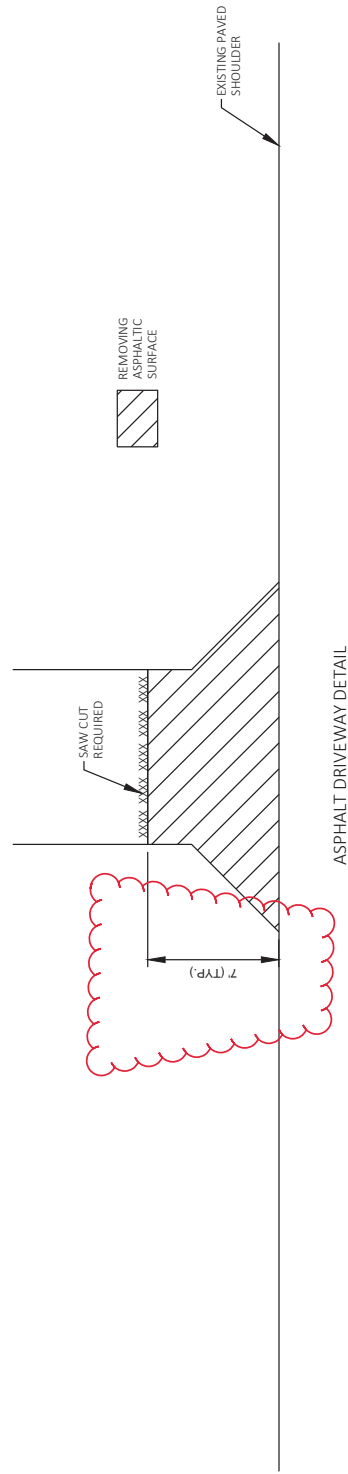

ASPHALT DRIVEWAY DETAIL

Addendum No. 01
 ID 5880-03-63
 Revised Sheet 5
 May 23, 2017

PROJECT NO: 5880-03-63	HWY: USH 12	COUNTY: JUNEAU	CONSTRUCTION DETAIL	SHEET 5	E
FILE NAME: P:\STATEVU12\5880033\CAD\CBV\02100_CD.DWG	LAYOUT NAME: Pcn 1 IN 40 FT	PLOT DATE: 7/16/2017 10:49 AM	FLOT BY: SCHUMAKER, MATHANEL	PLOT SCALE: #####	WISDOT/CADD SHEET 42

PAVEMENT MARKING EPOXY 4-INCH

STATION	TO	STATION	LOCATION	646.0106 LF	DASH YL LF	WHITE LF
---------	----	---------	----------	-------------	------------	----------



STATION	TO	STATION	LOCATION	646.0106 LF	DASH YL LF	WHITE LF
100+22	-	166+18	C/L	12016	300.0	
166+18	-	204+56	C/L		962.5	94
204+56	-	214+39	C/L	983	250.0	308
214+39	-	215+45	C/L		25.0	80
215+45	-	274+30	C/L	7845	975.0	8
274+30	-	283+25	C/L		225.0	314
283+25	-	291+75	C/L	850	125.0	72
291+75	-	294+37	C/L		62.5	68
294+37	-	302+44	C/L	807	200.0	20
302+44	-	306+66	C/L		100.0	64
306+66	-	313+52	C/L	686	175.0	36
313+52	-	327+72	C/L		350.0	56
327+72	-	335+16	C/L	744	187.5	114
335+16	-	362+14	C/L	7434	675.0	60
362+14	-	411+26	C/L		600.0	216
411+26	-	419+53	C/L		212.5	190
419+53	-	427+65	C/L	812	200.0	68
427+65	-	430+29	C/L		62.5	64
430+29	-	438+74	C/L	845	212.5	20
438+74	-	450+51	C/L		300.0	68
450+51	-	486+64	C/L	5204	500.0	94
486+64	-	491+39	C/L		125.0	162
491+39	-	535+13	C/L	6431	575.0	40
535+13	-	595+00	C/L		1500.0	186
595+00	-	600+65	C/L	565	137.5	480
600+65	-	606+26	C/L		137.5	44
606+26	-	611+16	C/L	490	125.0	44
611+16	-	631+26	C/L		500.0	40
631+26	-	639+75	C/L	849	121.5	160
639+75	-	642+92	C/L		75.0	68
642+92	-	650+00	C/L	708	175.0	24
650+00	-	651+06	C/L		25.0	56
651+06	-	669+00	LT	2524	262.5	12
669+00	-		RT			86
116+00	-					
		SUBTOTAL		49793	10459	110918
		TOTAL 0010		171170		

Addendum No. 01
 ID 5880-03-63
 Revised Sheet 32
 May 23, 2017

CONSTRUCTION STAKING RESURFACING REFERENCE

STATION	TO	STATION	LOCATION	650.8000 LF
99+75	-	114+00	Mai ml ine	1425
114+00	-	125+05	Mai ml ine	1105
127+38	-	158+46	Mai ml ine	3108
159+33	-	471+43	Mai ml ine	31210
471+82	-	669+00	Mai ml ine	19718
		TOTAL 0010		56566

SPECIAL (01 CONCRETE SURFACE DRAIN MODIFICATION)

STATION	LOCATION	SPV. 0060 01 EACH
125+00	RT	1
127+34	RT	1
471+84	RT	1
	TOTAL 0010	3

SPECIAL (01 REMOVING DISTRESSED PAVEMENT MILLING)

STATION	LOCATION	SPV. 0180. 01 SY	REMARKS
	UNDI STRIBUTED	3775	2% OF MILLED SURFACE
	TOTAL 0010	3775	

SUB TOTAL 49793 3416
 2 APPLICATIONS X2
 TOTAL 0010 106418



Proposal Schedule of Items

Proposal ID: 20170613026 Project(s): 5880-03-63

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0320	643.0300 Traffic Control Drums	6,000.000 DAY	_____.	_____.
0330	643.0900 Traffic Control Signs	1,400.000 DAY	_____.	_____.
0340	643.1050 Traffic Control Signs PCMS	14.000 DAY	_____.	_____.
0350	646.0106 Pavement Marking Epoxy 4-Inch	171,170.000 LF	_____.	_____.
0370	650.8000 Construction Staking Resurfacing Reference	56,566.000 LF	_____.	_____.
0380	690.0150 Sawing Asphalt	2,314.000 LF	_____.	_____.
0390	SPV.0060 Special 01. Concrete Surface Drain Modification	3.000 EACH	_____.	_____.
0400	SPV.0180 Special 01. Removing Distressed Pavement Milling	3,775.000 SY	_____.	_____.
0410	649.0403 Temporary Pavement Marking Epoxy 4-Inch	106,418.000 LF	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.

