



# Wisconsin Department of Transportation

## Division of Transportation Systems Development

Bureau of Project Development  
4802 Sheboygan Avenue, Rm 601  
P O Box 7916  
Madison, WI 53707-7916

January 8, 2018

Telephone: (608) 266-1631  
Facsimile (FAX): (608) 266-8459

### NOTICE TO ALL CONTRACTORS:

**Proposal #25: 1195-06-61, WISC 2018 106**  
**Rice Lake – Spooner**  
**CTH SS Bridge North Bound B-03-0057**  
**USH 53**  
**Barron County**

### Letting of January 9, 2018

This is Addendum No. 1, which provides for the following:

#### Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
509.1000	Joint Repair	SY	80	-10	70

#### Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
24	Quantity Revision

#### **Schedule of Items**

Attached, dated January 8, 2018, are the revised Schedule of Items Page 1.

#### **Plan Sheets**

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 24

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

*Mike Coleman*

Proposal Development Specialist  
Proposal Management Section


END OF ADDENDUM

STATE PROJECT NUMBER

1195-06-61

**GENERAL NOTES**

DRAWINGS SHALL NOT BE SCALED.  
 BAR STEEL REINFORCEMENT SHALL BE EMBEDDED 2" CLEAR UNLESS SHOWN OR NOTED OTHERWISE.  
 THE FIRST OR FIRST TWO DIGITS OF THE BAR MARK SIGNIFIES THE BAR SIZE.  
 DIMENSIONS SHOWN ARE BASED ON THE ORIGINAL STRUCTURE PLAN.  
 ANY EXCAVATION NECESSARY TO COMPLETE THE OVERLAY OR JOINT REPAIR AT THE ABUTMENTS IS TO BE CONSIDERED INCIDENTAL TO THE BID ITEM "CONCRETE MASONRY DECK REPAIR".  
 EXTENDING LONGITUDINAL DECK AND PARAPET REINFORCEMENT THAT EXTENDS IN THE JOINT REPAIR AREAS SHALL REMAIN IN PLACE. TRIM AS REQUIRED TO ACCOMMODATE THE 2" CLEAR COVER IN RELATION TO THE NEW JOINT OPENING. EXTEND EXISTING BAR STEEL 24 DIAMETERS INTO NEW WORK.  
 THE ADDITIONAL HORIZONTAL REINFORCEMENT REQUIRED IN THE PARAPETS SHALL BE TIED TO THE EXISTING HORIZONTAL REINFORCEMENT.  
 CONCRETE REMOVAL LINES SHALL BE DEFINED BY A 1" DEEP SAW CUT.  
 CLEAN AND PAINT ALL EXISTING EXPOSED SUPERSTRUCTURE STEEL INCLUDING GIRDERS, DIAPHRAGMS AND HARDWARE. THE COLOR SHALL BE FEDERAL COLOR #26293 (LIGHT GRAY) OR SIMILAR COLOR APPROVED BY THE ENGINEER.  
 PREPARATION DECKS TYPE 1, PREPARATION DECKS TYPE 2 AND CONCRETE SURFACE REPAIR AREAS ARE FOR INFORMATIONAL PURPOSES ONLY AND FINAL AREAS ARE TO BE DETERMINED BY THE FIELD ENGINEER. THE QUANTITY FOR PREPARATION DECKS TYPE 2 IS ESTIMATED AT 46% OF TYPE 1 AREAS FOR THIS STRUCTURE.  
 EXPANSION JOINT ASSEMBLY, INCLUDING ANCHOR STUDS AND HARDWARE, SHALL BE PAID FOR IN THE LUMP SUM PRICE BID AS "EXPANSION DEVICE B-3-57".  
 MATERIALS, EQUIPMENT, ETC. SHALL NOT BE STOCKPILED/STORED ON THE BRIDGE DECK WITHOUT PRIOR APPROVAL FROM THE ENGINEER.  
 JOINT REPAIRS AND DECK PREPARATION AREAS SHALL BE FILLED WITH "CONCRETE MASONRY DECK REPAIR".  
 DECK SURFACE PREPARATION IS INCLUDED IN THE BID ITEM "POLYMER OVERLAY".  
 AFTER CLEANING THE EXISTING PARAPETS, APPLY WHITE PIGMENTED SURFACE SEALER TO THE TOP AND INSIDE FACES. BOTH SHALL BE DONE TO THE SATISFACTION OF THE FIELD ENGINEER.

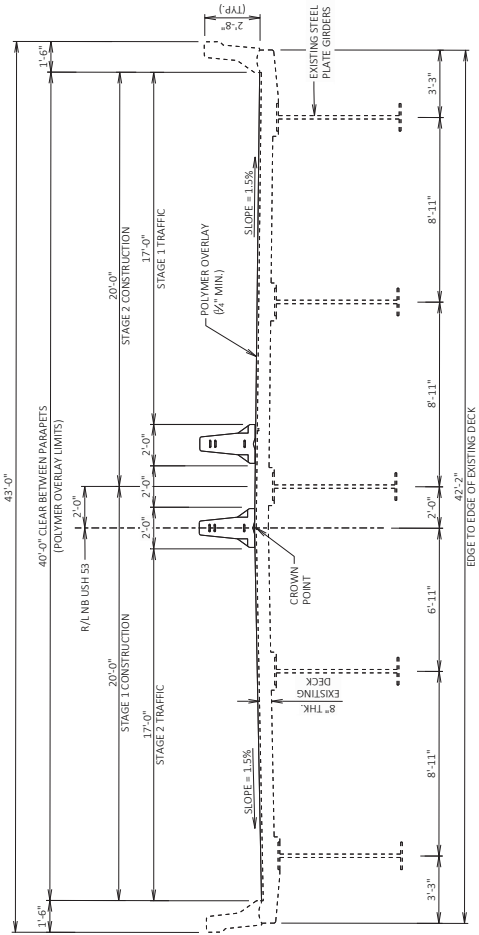


**CROSS SECTION THRU ROADWAY**  
LOOKING NORTH

**TOTAL ESTIMATED QUANTITIES**

BID NUMBER	BID ITEM	UNIT	TOTALS
502.3100	EXPANSION DEVICE B-3-57	LS	1
502.3210	PIGMENTED SURFACE SEALER	SF	440
502.4205	ADHESIVE ANCHORS NO. 5 BAR	EACH	76
505.0600	BAR STEEL REINFORCEMENTS COATED STRUCTURES	LB	7,080
505.0907	BAR COUPLERS NO. 7	EACH	18
506.6000	BEARINGS ASSEMBLIES EXPANSION B-3-57	EACH	10
506.7050.S	REMOVING BEARINGS B-3-57	EACH	10
509.0301	PREPARATION DECKS TYPE 1	SF	14
509.0302	PREPARATION DECKS TYPE 2	SF	10
509.0303	CONCRETE SURFACE REPAIR	SF	25
509.1500	CONCRETE SURFACE REPAIR	SF	25
509.2000	FULL-DEPTH DECK REPAIR	SF	1
509.5100.S	POLYMER OVERLAY	SF	2,243
509.9050.S	CLEANING PARAPETS	LF	1,085
517.0900.S	PREPARATION AND COATING OF TOP FLANGES	LS	1
517.3000.S	STRUCTURE OVERCOATING CLEANING AND PRIMING B-3-57	LS	1
517.4000.S	CONTAINMENT AND COLLECTION OF WASTE MATERIALS B-3-57	LS	1
SPV.0035	CONCRETE MASONRY DECK REPAIR	CY	27
SPV.0090	SAVING PAVEMENT DECK PREPARATION AREAS	LF	10

\* ITEM IS UTILIZED FOR CONCRETE PLACEMENT IN DECK, PREPARATION AND JOINT REPAIR AREAS.  
 \*\* CONCRETE SURFACE REPAIR LOCATIONS TO BE DETERMINED BY THE ENGINEER.  
 \*\*\* FULL-DEPTH DECK REPAIR QUANTITIES FOR INFORMATIONAL PURPOSES ONLY. LOCATION TO BE DETERMINED BY THE ENGINEER.

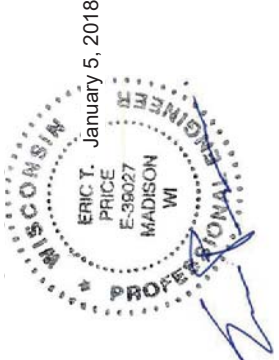

*William C. Decker*  
 01/08/18

Addendum No. 01  
 ID 1195-06-61  
 Revised Sheet 24  
 January 8, 2018



ORIGINAL PLAN PREPARED BY

STATE OF WISCONSIN  
 DEPARTMENT OF TRANSPORTATION  
 STRUCTURE B-3-57  
 TYPICAL SECTION & QUANTITIES  
 SHEET 2 OF 7  
 24



## Proposal Schedule of Items

Page 1 of 3

Proposal ID: 20180109025 Project(s): 1195-06-61

Federal ID(s): WISC 2018106

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	213.0100 Finishing Roadway (project) 01. 1195-06-61	1.000 EACH	_____.	_____.
0004	502.3100 Expansion Device (structure) 01. B-03-0057	LS	LUMP SUM	_____.
0006	502.3210 Pigmented Surface Sealer	440.000 SY	_____.	_____.
0008	502.4205 Adhesive Anchors No. 5 Bar	76.000 EACH	_____.	_____.
0010	505.0600 Bar Steel Reinforcement HS Coated Structures	7,080.000 LB	_____.	_____.
0012	505.0907 Bar Couplers No. 7	18.000 EACH	_____.	_____.
0014	506.6000 Bearing Assemblies Expansion (structure) 01. B-03-0057	10.000 EACH	_____.	_____.
0016	506.7050.S Removing Bearings (structure) 01. B-03-0057	10.000 EACH	_____.	_____.
0018	509.0301 Preparation Decks Type 1	14.000 SY	_____.	_____.
0020	509.0302 Preparation Decks Type 2	10.000 SY	_____.	_____.
0022	509.1000 Joint Repair	70.000 SY	_____.	_____.
0024	509.1500 Concrete Surface Repair	25.000 SF	_____.	_____.
0026	509.2000 Full-Depth Deck Repair	1.000 SY	_____.	_____.
0028	509.5100.S Polymer Overlay	2,243.000 SY	_____.	_____.
0030	509.9050.S Cleaning Parapets	1,085.000 LF	_____.	_____.

