



# Wisconsin Department of Transportation

March 8, 2018

## Division of Transportation Systems Development

Bureau of Project Development  
4802 Sheboygan Avenue, Rm 601  
P O Box 7916  
Madison, WI 53707-7916

Telephone: (608) 266-1631  
Facsimile (FAX): (608) 266-8459

### NOTICE TO ALL CONTRACTORS:

**Proposal #08: 5796-00-70**  
**City of Verone, Old CTH PB**  
**Br Badger Mill Creek Br B-13-0674**  
**Lo Str**  
**Dane County**

**5796-00-73**  
**T Verona, Old CTH PB**  
**Badger Mill Creek Br B-13-0683**  
**Loc Str**  
**Dane County**

### Letting of March 13, 2018

This is Addendum No. 01, which provides for the following:

#### Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
48	B-13-674 Sheet 6 of 6, Culvert Details (revised breaker run note)

#### **Plan Sheets**

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:  
Revised: 48.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.


Sincerely,

*Mike Coleman*


Proposal Development Specialist  
Proposal Management Section

END OF ADDENDUM

Addendum No. 01  
ID 5796-00-70  
Revised Sheet 48  
March 8, 2018

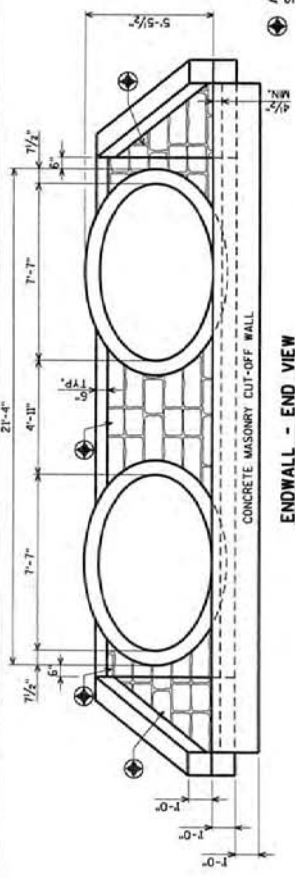

ARCHITECTURAL SURFACE TREATMENT.  
SEE DETAILS ON THIS SHEET.

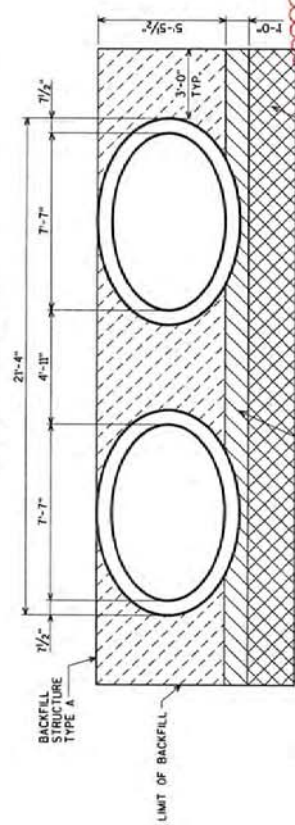


GRANULAR FOUNDATION, INCIDENTAL TO BID  
ITEM "CULVERT PIPE REINFORCED CONCRETE  
HORIZONTAL ELLIPTICAL CLASS HE-III  
58 X 91-INCH"

**BACKFILL STRUCTURE DETAIL**

BACKFILL PAY LIMITS BEYOND BACKFILL PAY LIMITS  
SHALL BE INCIDENTAL TO EXCAVATION FOR STRUCTURES. LIMITS  
OF EXCAVATION SHALL BE DETERMINED BY THE CONTRACTOR.


BREAKER RUN, INCIDENTAL TO BID  
ITEM "CULVERT PIPE REINFORCED  
CONCRETE HORIZONTAL ELLIPTICAL  
CLASS HE-III 58 X 91-INCH"

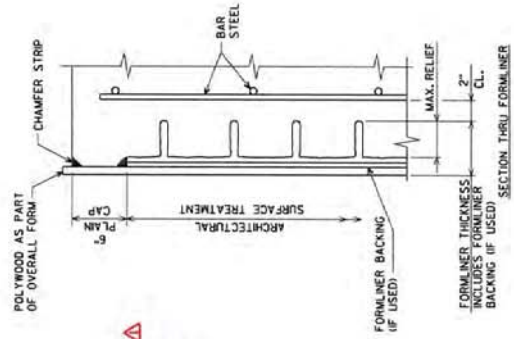

FORMLINER THICKNESS  
INCLUDES FORMLINER  
BACKING IF USED  
SECTION THRU FORMLINER

**WING WALL NOTES**

THE FORMLINER COURSING ON THE WINGS SHALL BE VERTICALLY ALIGNED  
WITH THE FORMLINER COURSING ON ADJACENT WALLS.  
THE FORMLINER PATTERN SHALL BE CONTINUOUS ACROSS CONSTRUCTION JOINTS.  
FORMLINER COURSING SHALL BE LEVEL.  
WRAP AROUND/MATCH FORMLINER PATTERN AT CORNERS.

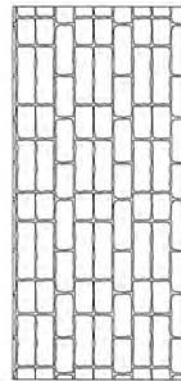

**RECTANGULAR CUT STONE**  
FORMLINER THICKNESS = 2" TO 3"  
COURSE HEIGHT = 9" ± 2"  
MAX. RELIEF = 1" TO 2"



NO.	DATE	BY	REVISION
1			3/8/18

STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

STRUCTURE B-13-674  
ISSUED BY: C.J.M. DATE: J.L.B.

CULVERT  
DETAILS  
SHEET 6 OF 6  
48

*William C. Decker, Inc.*  
03/08/18

ORIGINAL PLANS PREPARED BY  
**AVRES ASSOCIATES**  
3433 Oakwood Hills Parkway  
Eau Claire, WI 54601  
www.avresassociates.com