



Wisconsin Department of Transportation

November 9, 2018

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #26: 6320-08-62, WISC 2018 448
Plainfield – Wisconsin Rapids
Bridge Maintenance B-71-0018
STH 73
Wood County

9000-13-61, WISC 2018 449
Merrill - Antigo
Bridge Maintenance B-35-0002
STH 64
Lincoln County

9260-01-61, WISC 2018 450
Crandon – Three Lakes
Bridge Maintenance B-21-0015
STH 32
Forest County

Letting of November 8, 2018

This is Addendum No. 01, which provides for the following:

Schedule of Items:

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
502.4205	Adhesive Anchors No. 5	EA	0	112	112
509.2500	Concrete Masonry Overlay Decks	CY	0	17	17

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
64	Structure Quantities Table (Added: Adhesive Anchors No. 5 Bars & Concrete Masonry Overlay Decks)

Schedule of Items

Attached, dated November 9, 2018, are the revised Schedule of Items Page 6.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 64.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

GENERAL NOTES


DRAWINGS SHALL NOT BE SCALED.
 SEE ROAD PLANS FOR TRAFFIC CONTROL.
 THE FIRST DIGIT OF A THREE DIGIT BAR MARK SIGNIFIES THE BAR SIZE.
 BAR STEEL REINFORCEMENT SHALL BE EMBEDDED 2" CLEAR UNLESS SHOWN OR NOTED OTHERWISE.
 DIMENSIONS AND STATIONING SHOWN ARE BASED ON ORIGINAL 1990 PLANS WHICH ARE AVAILABLE FROM THE WISCONSIN DEPARTMENT OF TRANSPORTATION.
 IMPROVEMENTS INCLUDE EXPANSION JOINT REPLACEMENTS.
 ALL CONCRETE REMOVAL SHALL BE DEFINED BY A 1/2" DEEP SAW CUT.

THIS PROJECT WILL REHABILITATE THE EXISTING STRUCTURE, B-21-15, A THREE SPAN, 205.96 FOOT LONG, PRESTRESSED CONCRETE GIRDER BRIDGE SET ON FULL RETAINING CONCRETE ABUTMENTS AND TWO SINGLE-COLUMN HAMMERHEAD PIERS.
 THE CONCRETE APPROACH SLABS ARE FULL WIDTH OF THE ROADWAY AT EACH END OF THE BRIDGE AND HAVE NO POLYMER OVERLAY. REPLACE PAVING BLOCK AT EACH JOINT REPLACEMENT WITHOUT DAMAGE TO APPROACH SLABS.
 POLYMER OVERLAY IS REQUIRED AT JOINT REPAIRS, ASSOCIATED EXPANSION DEVICES REPLACEMENT, AND AT OTHER LOCALIZED AREAS ON THE BRIDGE DECK AS DIRECTED BY THE ENGINEER.
 CONCRETE SURFACE REPAIR IS REQUIRED AT ENDS OF ABUTMENTS, ON ABUTMENT SKEWILLS AND ON PRESTRESSED CONCRETE GIRDERS #2 NEAR THE SOUTH ABUTMENT AND ON PRESTRESSED CONCRETE GIRDERS #5 NEAR THE NORTH ABUTMENT. THE LIMITS OF REPAIR ARE TO BE DIRECTED BY THE ENGINEER.

APPLY PIGMENTED SURFACE SEALER TO THE TRAFFIC FACES OF ALL EXISTING & REPAIRED CONCRETE PARAPETS.


EXPANSION JOINT ASSEMBLY, INCLUDING ANCHORS, STUDS AND HARDWARE SHALL BE PAID FOR IN THE LUMP SUM PRICE BID AS "EXPANSION DEVICE B-21-15".

Addendum No. 01
 ID 9260-01-61
 Revised Sheet 64
 November 9, 2018

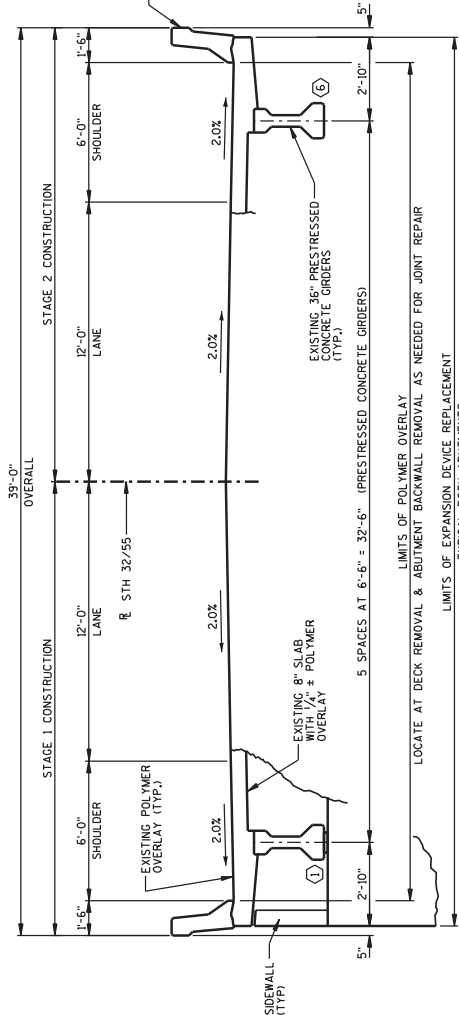


EXISTING TYPICAL SECTION - STH 32/55
 (LOOKING NORTH)

○ — INDICATES GIRDER NUMBER.
 GIRDERS ARE NUMBERED SEQUENTIALLY

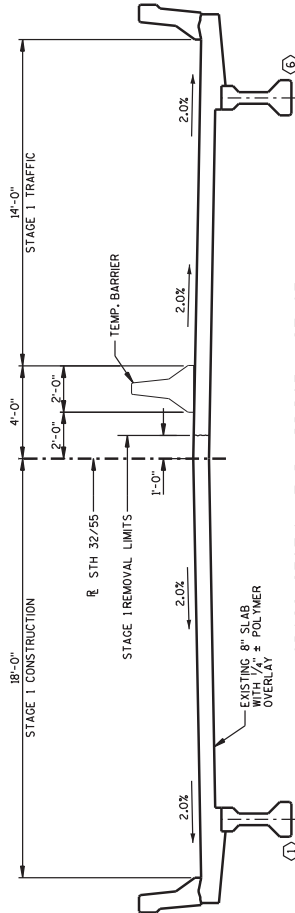

CROSS SECTION THRU BRIDGE - STAGE 1
 (LOOKING NORTH)

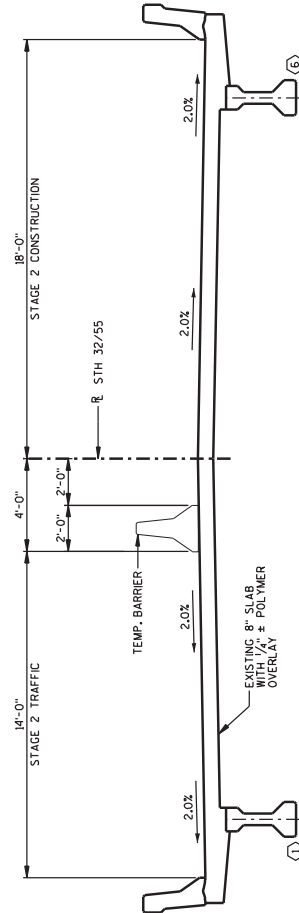

CROSS SECTION THRU BRIDGE - STAGE 2
 (LOOKING NORTH)

STRUCTURE ESTIMATED QUANTITIES

ITEM NUMBER	BID ITEM	UNIT	WEST ABUT.	PIER 1	PIER 2	EAST ABUT.	SUPER	TOTAL
203.02.25.03	DEBRIS CONTAINMENT B-21-15	LS	-	-	-	-	-	1
502.3100.03	EXPANSION DEVICE B-21-15	LS	-	-	-	-	-	1
502.3210	PIGMENTED SURFACE SEALER	SY	-	-	-	-	-	190
502.4205	ADHESIVE ANCHORS NO. 5 BAR	EACH	-	-	-	-	-	112
505.0600	BAR STEEL REINFORCEMENT HS COATED STRUCTURES	LB	-	-	-	-	-	4420
505.0904	BAR COUPLERS NO. 4	EACH	-	-	-	-	-	6
505.0905	BAR COUPLERS NO. 5	EACH	-	-	-	-	-	6
505.0906	BAR COUPLERS NO. 6	EACH	-	-	-	-	-	24
505.0907	BAR COUPLERS NO. 7	EACH	-	-	-	-	-	12
509.1000	JOINT REPAIR	SF	-	-	-	-	-	49
509.1500	CONCRETE SURFACE REPAIR	SF	20	-	-	10	-	40
509.2500	CONCRETE MASONRY OVERLAY DECKS	CY	-	-	-	-	-	17
509.5100.S	POLYMER OVERLAY	SY	-	-	-	-	-	50



William C. Decker
 11/09/18

NO.	DATE	REVISION	ESTIMATED QUANTITIES TABLE	RLR	BY

STATE OF WISCONSIN
 DEPARTMENT OF TRANSPORTATION

STRUCTURE B-21-15

TYPICAL SECTION QUANTITIES & NOTES

SHEET 2 OF 5

64



Proposal Schedule of Items

Proposal ID: 20181113026 Project(s): 6320-08-62, 9000-13-61, 9260-01-61

Federal ID(s): WISC 2018448, WISC 2018449, WISC 2018450

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0160	650.9910 Construction Staking Supplemental Control (project) 01. 6320-08-62	LS	LUMP SUM	_____.
0162	650.9910 Construction Staking Supplemental Control (project) 02. 9000-13-61	LS	LUMP SUM	_____.
0164	650.9910 Construction Staking Supplemental Control (project) 03. 9260-01-61	LS	LUMP SUM	_____.
0166	661.0100 Temporary Traffic Signals for Bridges (structure) 03. B-21-15	LS	LUMP SUM	_____.
0168	690.0150 Sawing Asphalt	115.000 LF	_____.	_____.
0170	690.0250 Sawing Concrete	90.000 LF	_____.	_____.
0172	715.0502 Incentive Strength Concrete Structures	96.000 DOL	1.00000	96.00
0174	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	150.000 HRS	5.00000	750.00
0176	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	300.000 HRS	5.00000	1,500.00
0178	SPV.0060 Special 01. Parapet Wall Raising	2.000 EACH	_____.	_____.
0180	SPV.0165 Special 01. Repointing Stone Masonry	1,500.000 SF	_____.	_____.
0182	502.4205 Adhesive Anchors No. 5 Bar	112.000 EACH	_____.	_____.
0184	509.2500 Concrete Masonry Overlay Decks	17.000 CY	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.