



Wisconsin Department of Transportation

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

March 6, 2019

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #40: 4996-01-79, WISC 2019 173
C Sheboygan, North Ave
Calumet Dr to 15th St
Local Street
Sheboygan County

Letting of March 12, 2019

This is Addendum No. 01, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
20	Abandoning Sewer, Item 204.0291.S
57	Sanitary Sewer 8-Inch, Item SPV.0090.11

Schedule of Items:

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
460.6224	HMA Pavement 4 MT 58-28 S	Ton	0	307	307

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
460.5224	HMA Pavement 4 LT 58-28 S	Ton	307	-307	0

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
9,11	Typical Section (Clarified HMA Pavement Type)
119	Miscellaneous Quantities (Replaced LT mix with MT mix)

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01

4996-01-79

March 6, 2019

Special Provisions

20. Abandoning Sewer, Item 204.0291.S

Add the following to section titled C Construction:

The maximum layer thickness shall not exceed 3 feet. Additional layers shall not be placed until the previously placed cellular concrete has lost sufficient moisture.

57. Sanitary Sewer 8-Inch, Item SPV.0090.11

Replace entire section titled C.2 Sanitary Sewer Mainline Testing with the following:

C.2 Sanitary Sewer Mainline Testing

The unit price for sanitary sewer pipe shall also include alignment, grade, deflection, and deformation testing; water filtration and water exfiltration testing, and mandrel tests. Closed circuit television testing is also required and will be measured and paid for separately.


Schedule of Items

Attached, dated March 6, 2019, are the revised Schedule of Items Pages 1 – 14.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:
Revised: 9, 11 and 119.

END OF ADDENDUM

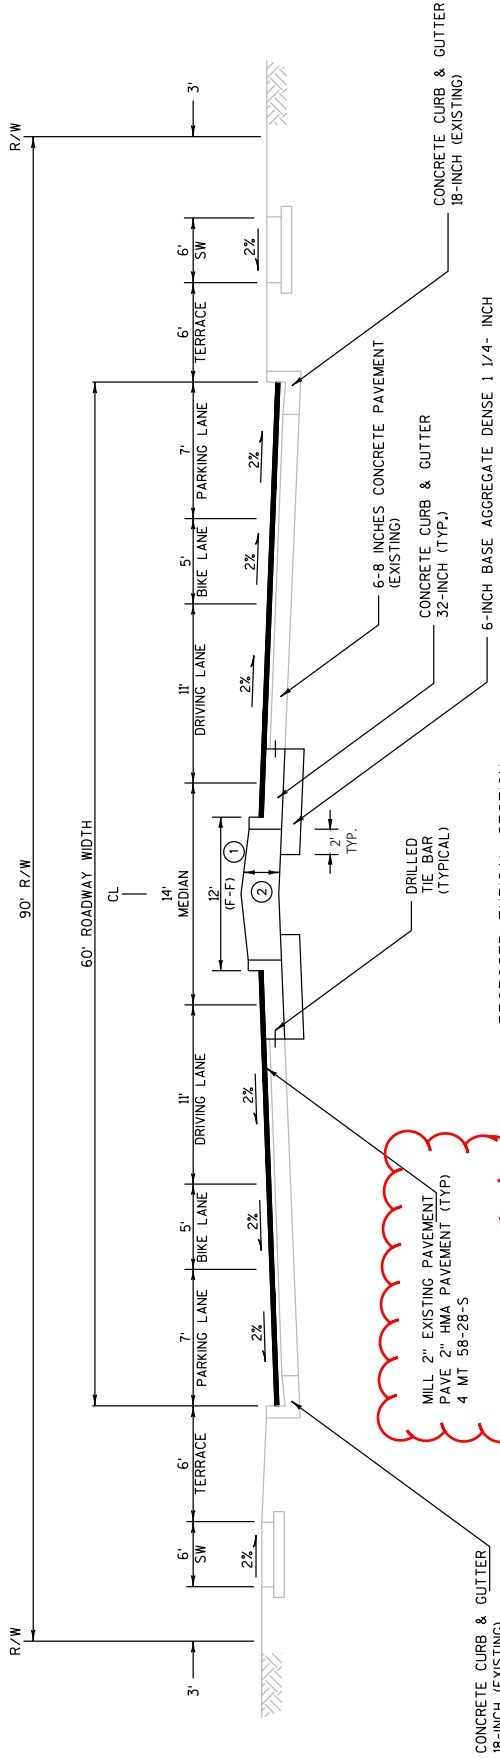

PROPOSED TYPICAL SECTION
STA 43+06 TO STA 46+23

Addendum No. 01
ID 4996-01-79
Revised Sheet 11
March 6, 2019

REMOVING AND ABANDONING STORM SEWER

STAGE	STATION	LOCATION	L.F.	L.F.	18-24	204.0150.02	204.0150.03	204.0291.S	ABANDON
			12-INCH OR LESS	13-17-INCH	18-24				CY
2	12+42LT - 12+92LT	NORTH AVE	49	-	-	-	-	-	-
2	12+92LT - 13+77LT	NORTH AVE	81	-	-	-	-	-	-
2,4	13+32RT - 13+72LT	NORTH AVE	-	-	-	2.1	-	-	-
2,4	13+84RT - 13+72LT	NORTH AVE	-	-	-	1.8	-	-	-
2	13+32LT - 13+39LT	NORTH AVE	9	-	-	-	-	-	-
2	13+39LT - 13+72LT	NORTH AVE	42	-	-	-	-	-	-
2	13+99LT - 13+86LT	NORTH AVE	206	-	-	-	-	-	-
2	13+86LT - 13+72LT	NORTH AVE	17	-	-	-	-	-	-
2	13+72LT - 17+27LT	NORTH AVE	-	355	-	-	-	-	-
2,4	16+68RT - 16+68LT	NORTH AVE	54	-	-	-	-	-	-
2	17+49LT - 17+49LT	NORTH AVE	6	-	-	-	-	-	-
2	17+27LT - 19+13LT	NORTH AVE	-	186	-	-	-	-	-
2,4	18+79RT - 19+13LT	NORTH AVE	-	-	-	2.0	-	-	-
2,4	19+28RT - 19+13LT	NORTH AVE	15	-	-	-	-	-	-
2,4	19+28LT - 19+13LT	NORTH AVE	-	-	-	1.8	-	-	-
2	19+13LT - 22+31LT	NORTH AVE	-	318	-	-	-	-	-
2	22+00LT - 22+31LT	NORTH AVE	33	-	-	-	-	-	-
2,4	22+00RT - 22+31LT	NORTH AVE	-	-	-	2	-	-	-
2	22+43LT - 22+31LT	NORTH AVE	16	-	-	-	-	-	-
2,4	22+42RT - 22+31LT	NORTH AVE	62	-	-	-	-	-	-
2,4	26+00RT - 25+99LT	NORTH AVE	55	-	-	-	-	-	-
3	27+15LT - 27+22RT	NORTH AVE	-	-	-	1.5	-	-	-
3	27+16RT - 27+22RT	NORTH AVE	-	-	-	0.3	-	-	-
3	27+22RT - 28+24RT	NORTH AVE	-	-	-	3.0	-	-	-
3	28+01RT - 28+24RT	NORTH AVE	-	-	-	4.6	-	-	-
3	28+28RT - 28+24RT	NORTH AVE	-	-	-	0.3	-	-	-
3	28+24RT - 28+54LT	NORTH AVE	-	-	-	21.3	-	-	-
3	28+07LT - 28+24RT	NORTH AVE	-	-	-	1.5	-	-	-
2	35+96LT - 36+00LT	NORTH AVE	7	-	-	-	-	-	-
2	36+00LT - 37+88LT	NORTH AVE	188	-	-	-	-	-	-
2	37+88LT - 39+95LT	NORTH AVE	206	-	-	-	-	-	-
2	39+69LT - 39+95LT	NORTH AVE	33	-	-	-	-	-	-
4	39+86RT - 39+71RT	NORTH AVE	22	-	-	-	-	-	-
2,4	39+71RT - 39+95LT	NORTH AVE	47	-	-	-	-	-	-
2,4	40+34RT - 39+95LT	NORTH AVE	68	-	-	-	-	-	-
4	40+49RT - 40+34RT	NORTH AVE	22	-	-	-	-	-	-
2	40+48LT - 39+95LT	NORTH AVE	57	-	-	191	-	-	-
2	39+95LT - 39+93LT	NORTH AVE	-	-	-	127	-	-	-
2,4	39+95RT - 39+95LT	NORTH AVE	-	-	-	-	-	-	-
PROJECT TOTALS									
			1295	858	318	42			

Addendum No. 01
ID 4996-01-79
Revised Sheet 119
March 6, 2019

ALL ITEMS ON THIS SHEET ARE CATEGORY 0010 UNLESS OTHERWISE NOTED

EARTHWORK SUMMARY

Common Excavation (Item # 205.0100)	Cut	EBS	Location	From/To Station	Stage	Division	Savings/Unusable Pavement Material		Available Material		Unexpanded Fill		Expanded Fill		Mass Ordinate +/-	Factor
							Unusable	Material	Material	Material	Fill	Fill	Fill	Fill		
	4,047	1,144	NORTH AVE	12+33.85 - 22+25	2			2,903	74	2,805	98				1.33	
	2,277	644	NORTH AVE	22+25 - 22+25	4			1,633	41	1,578	55					
	5,424	1,533	NORTH AVE	22+25 - 31+15	3			3,891	370	3,399	492					
	4,159	1,175	NORTH AVE	31+15 - 43+06	4			2,984	180	2,745	239					
	2,142	605	NORTH AVE	31+15 - 43+06	4			1,537	93	1,413	124					
	1,045	200	21ST ST	60+00 - 61+92	2			845	3	841	4					
	488	200	19TH ST	78+80 - 80+00	4			288	2	285	3					
	680	175	MUTH CT	80+00 - 81+75	2			505	3	501	4					
	184	75	20TH ST	69+34 - 70+00	4			109	5	102	7					
	646	90	15TH ST (SOUTH)	88+94.5 - 90+00	4			556	3	552	4					
	988	200	15TH ST (NORTH)	90+00 - 92+03.65	2,3,4			788	4	783	5					
	1,500	0	UNDISTRIBUTED	110+15 - 164+05	2,3,4			0	0	0	0					
Subtotal	22,080	6,041						16,039	778	15,004	1,035					
Grand Total	23,580	6,041						16,039	778	15,004	1,035					
Total Common Excavation																
23,580																

STAGE	STATION	LOCATION	SY	GAL	TONS	TONS	TONS	TONS	TONS	REMARKS
2 & 4	43+06 - 46+23	NORTH AVE	1400	35	205	-	-	-	-	MAINLINE OVERLAY
2	13+00 LT	NORTH AVE	-	-	-	-	32	-	-	DRIVEWAY
4	13+00 RT	NORTH AVE	-	-	-	-	3	-	-	DRIVEWAY
2	14+25 LT	NORTH AVE	-	-	-	-	2	-	-	DRIVEWAY
4	14+25 RT	NORTH AVE	-	-	-	-	4	-	-	DRIVEWAY
2	14+51 LT	NORTH AVE	-	-	-	-	2	-	-	DRIVEWAY
2	17+00 LT	NORTH AVE	-	-	-	-	21	-	-	DRIVEWAY
2	20+65 LT	NORTH AVE	-	-	-	-	63	-	-	DRIVEWAY
4	20+65 RT	NORTH AVE	-	-	-	-	3	-	-	DRIVEWAY
2	24+20 LT	NORTH AVE	-	-	-	-	3	-	-	DRIVEWAY
2	29+25 LT	NORTH AVE	-	-	-	-	21	-	-	DRIVEWAY
2	41+25 LT	NORTH AVE	-	-	-	-	2	-	-	DRIVEWAY
4	81+50 RT	MUTH CT	-	-	-	-	8	-	-	DRIVEWAY
4	90+90 RT	15TH ST	-	-	-	-	4	-	-	DRIVEWAY
4	91+75 RT	15TH ST	-	-	-	-	1	-	-	DRIVEWAY
4	28+00 RT	NORTH AVE	-	-	-	-	3	-	-	TRAIL CONNECTION
3	27+11.91 - 28+79.50	NORTH AVE	-	-	-	-	152	-	-	RR CROSSINGS
1	STAGE I	NORTH AVE	-	-	-	-	102	-	-	TEMPORARY CROSSOVERS
2	STAGE II	NORTH AVE	-	-	-	-	-	-	-	TEMP WIDENING
3	STAGE III	NORTH AVE	-	-	-	-	-	-	-	TEMP WIDENING
PROJECT TOTALS										
			1400	35	307	152	171	155	155	

ASPHALTIC ITEMS

STAGE	STATION	LOCATION	SY	GAL	TONS	TONS	TONS	TONS	TONS	REMARKS
204.0120	455.0605	REMOVING ASPHALTIC SURFACE MILLING	460.6224	480.6223	465.0120	465.0125	465.0120	465.0120	465.0125	ASPHALTIC SURFACE DRIVEWAYS AND FIELD ENTRANCES TEMPORARY
460.6224	HMA PAVEMENT	480.6223	HMA PAVEMENT	465.0120	465.0125	465.0120	465.0120	465.0125	465.0125	ASPHALTIC SURFACE DRIVEWAYS AND FIELD ENTRANCES TEMPORARY
4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4



Proposal Schedule of Items

Proposal ID: 20190312040 Project(s): 4996-01-79

Federal ID(s): WISC 2019173

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	201.0105 Clearing	1.000 STA	_____.	_____.
0004	201.0120 Clearing	798.000 ID	_____.	_____.
0006	201.0205 Grubbing	1.000 STA	_____.	_____.
0008	201.0220 Grubbing	798.000 ID	_____.	_____.
0010	204.0100 Removing Pavement	24,679.000 SY	_____.	_____.
0012	204.0120 Removing Asphaltic Surface Milling	1,400.000 SY	_____.	_____.
0014	204.0150 Removing Curb & Gutter	1,284.000 LF	_____.	_____.
0016	204.0155 Removing Concrete Sidewalk	3,641.000 SY	_____.	_____.
0018	204.0170 Removing Fence	128.000 LF	_____.	_____.
0020	204.0205 Removing Utility Poles	10.000 EACH	_____.	_____.
0022	204.0210 Removing Manholes	10.000 EACH	_____.	_____.
0024	204.0220 Removing Inlets	27.000 EACH	_____.	_____.
0026	204.0245 Removing Storm Sewer (size) 01. 12- Inch or Less	1,295.000 LF	_____.	_____.
0028	204.0245 Removing Storm Sewer (size) 02. 13 - 17-Inch	858.000 LF	_____.	_____.
0030	204.0245 Removing Storm Sewer (size) 03. 18 - 24-Inch	318.000 LF	_____.	_____.
0032	204.0291.S Abandoning Sewer	42.000 CY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20190312040 Project(s): 4996-01-79

Federal ID(s): WISC 2019173

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0034	205.0100 Excavation Common	23,580.000 CY	_____.	_____.
0036	213.0100 Finishing Roadway (project) 01. 4996-01-79	1.000 EACH	_____.	_____.
0038	305.0110 Base Aggregate Dense 3/4-Inch	1,000.000 TON	_____.	_____.
0040	305.0120 Base Aggregate Dense 1 1/4-Inch	10,208.000 TON	_____.	_____.
0042	311.0110 Breaker Run	25,350.000 TON	_____.	_____.
0044	390.0103 Base Patching	22.000 SY	_____.	_____.
0046	390.0303 Base Patching Concrete	32.000 SY	_____.	_____.
0048	405.0100 Coloring Concrete WisDOT Red	11.000 CY	_____.	_____.
0050	415.0080 Concrete Pavement 8-Inch	21,367.000 SY	_____.	_____.
0052	415.0210 Concrete Pavement Gaps	13.000 EACH	_____.	_____.
0054	415.4100 Concrete Pavement Joint Filling	21,367.000 SY	_____.	_____.
0056	415.5110.S Concrete Pavement Joint Layout	1.000 LS	_____.	_____.
0058	416.0160 Concrete Driveway 6-Inch	664.000 SY	_____.	_____.
0060	416.0180 Concrete Driveway 8-Inch	1,314.000 SY	_____.	_____.
0062	416.0610 Drilled Tie Bars	329.000 EACH	_____.	_____.
0064	416.0620 Drilled Dowel Bars	269.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20190312040 Project(s): 4996-01-79

Federal ID(s): WISC 2019173

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0066	455.0605 Tack Coat	35.000 GAL	_____.	_____.
0068	460.2000 Incentive Density HMA Pavement	300.000 DOL	1.00000	300.00
0072	460.6223 HMA Pavement 3 MT 58-28 S	152.000 TON	_____.	_____.
0074	465.0120 Asphaltic Surface Driveways and Field Entrances	171.000 TON	_____.	_____.
0076	465.0125 Asphaltic Surface Temporary	155.000 TON	_____.	_____.
0078	513.2001 Railing Pipe	5.000 LF	_____.	_____.
0080	520.8000 Concrete Collars for Pipe	7.000 EACH	_____.	_____.
0082	601.0110 Concrete Curb Type D	101.000 LF	_____.	_____.
0084	601.0405 Concrete Curb & Gutter 18-Inch Type A	60.000 LF	_____.	_____.
0086	601.0407 Concrete Curb & Gutter 18-Inch Type D	30.000 LF	_____.	_____.
0088	602.0405 Concrete Sidewalk 4-Inch	25,892.000 SF	_____.	_____.
0090	602.0415 Concrete Sidewalk 6-Inch	2,548.000 SF	_____.	_____.
0092	602.0515 Curb Ramp Detectable Warning Field Natural Patina	230.000 SF	_____.	_____.
0094	602.0615 Curb Ramp Detectable Warning Field Radial Natural Patina	90.000 SF	_____.	_____.
0096	602.1500 Concrete Steps	90.000 SF	_____.	_____.
0098	608.0005 Storm Sewer Rock Excavation	45.000 CY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20190312040 Project(s): 4996-01-79

Federal ID(s): WISC 2019173

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0100	608.0312 Storm Sewer Pipe Reinforced Concrete Class III 12-Inch	795.000 LF	_____.	_____.
0102	608.0315 Storm Sewer Pipe Reinforced Concrete Class III 15-Inch	453.000 LF	_____.	_____.
0104	608.0324 Storm Sewer Pipe Reinforced Concrete Class III 24-Inch	2,373.000 LF	_____.	_____.
0106	608.0348 Storm Sewer Pipe Reinforced Concrete Class III 48-Inch	10.000 LF	_____.	_____.
0108	608.0354 Storm Sewer Pipe Reinforced Concrete Class III 54-Inch	10.000 LF	_____.	_____.
0110	608.0512 Storm Sewer Pipe Reinforced Concrete Class V 12-Inch	40.000 LF	_____.	_____.
0112	608.0524 Storm Sewer Pipe Reinforced Concrete Class V 24-Inch	282.000 LF	_____.	_____.
0114	611.0639 Inlet Covers Type H-S	32.000 EACH	_____.	_____.
0116	611.1230 Catch Basins 2x3-FT	32.000 EACH	_____.	_____.
0118	611.2005 Manholes 5-FT Diameter	10.000 EACH	_____.	_____.
0120	611.2006 Manholes 6-FT Diameter	2.000 EACH	_____.	_____.
0122	611.2008 Manholes 8-FT Diameter	3.000 EACH	_____.	_____.
0124	611.8110 Adjusting Manhole Covers	10.000 EACH	_____.	_____.
0126	618.0100 Maintenance And Repair of Haul Roads (project) 01. 4996-01-79	1.000 EACH	_____.	_____.
0128	619.1000 Mobilization	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20190312040 Project(s): 4996-01-79

Federal ID(s): WISC 2019173

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0130	620.0100 Concrete Corrugated Median	256.000 SF	_____.	_____.
0132	620.0300 Concrete Median Sloped Nose	1,375.000 SF	_____.	_____.
0134	624.0100 Water	16.000 MGAL	_____.	_____.
0136	625.0100 Topsoil	11,472.000 SY	_____.	_____.
0138	627.0200 Mulching	500.000 SY	_____.	_____.
0140	628.1504 Silt Fence	440.000 LF	_____.	_____.
0142	628.1520 Silt Fence Maintenance	440.000 LF	_____.	_____.
0144	628.1905 Mobilizations Erosion Control	15.000 EACH	_____.	_____.
0146	628.1910 Mobilizations Emergency Erosion Control	6.000 EACH	_____.	_____.
0148	628.2008 Erosion Mat Urban Class I Type B	11,472.000 SY	_____.	_____.
0150	628.7005 Inlet Protection Type A	3.000 EACH	_____.	_____.
0152	628.7010 Inlet Protection Type B	4.000 EACH	_____.	_____.
0154	628.7015 Inlet Protection Type C	32.000 EACH	_____.	_____.
0156	628.7020 Inlet Protection Type D	37.000 EACH	_____.	_____.
0158	628.7504 Temporary Ditch Checks	50.000 LF	_____.	_____.
0160	628.7560 Tracking Pads	8.000 EACH	_____.	_____.
0162	628.7570 Rock Bags	20.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20190312040 Project(s): 4996-01-79

Federal ID(s): WISC 2019173

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0164	629.0210 Fertilizer Type B	9.100 CWT	_____.	_____.
0166	630.0140 Seeding Mixture No. 40	201.000 LB	_____.	_____.
0168	630.0200 Seeding Temporary	304.000 LB	_____.	_____.
0170	632.0101 Trees (species) (size) (root) 01. Adirondack Crab, 2" Caliper, B&B	3.000 EACH	_____.	_____.
0172	632.0101 Trees (species) (size) (root) 02. Autumn Brilliance Serviceberry, 2" Caliper, B&B	11.000 EACH	_____.	_____.
0174	632.0101 Trees (species) (size) (root) 03. Autumn Blaze Pear, 2" Caliper, B&B	8.000 EACH	_____.	_____.
0176	632.0101 Trees (species) (size) (root) 04. Prairie Sentinel Hackberry, 2" Caliper, B&B	3.000 EACH	_____.	_____.
0178	632.0101 Trees (species) (size) (root) 05. Espresso Kentucky Coffee Tree, 2" Caliper, B&B	6.000 EACH	_____.	_____.
0180	632.0101 Trees (species) (size) (root) 06. Spring Snow Crabapple, 2" Caliper, B&B	7.000 EACH	_____.	_____.
0182	632.0101 Trees (species) (size) (root) 07. Swamp White Oak, 2" Caliper, B&B	6.000 EACH	_____.	_____.
0184	632.0101 Trees (species) (size) (root) 08. Autumn Gold Ginkgo, 2" Caliper, B&B	11.000 EACH	_____.	_____.
0186	632.0101 Trees (species) (size) (root) 09. Eastern Redbud, 2" Caliper, B&B	4.000 EACH	_____.	_____.
0188	632.0101 Trees (species) (size) (root) 10. Robin Hill Serviceberry, 2" Caliper, B&B	6.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20190312040 Project(s): 4996-01-79

Federal ID(s): WISC 2019173

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0190	632.0101 Trees (species) (size) (root) 11. Early Glow Buckeye, 2" Caliper, B&B	10.000 EACH	_____.	_____.
0192	632.0101 Trees (species) (size) (root) 12. Chicagoland Hackberry, 2" Caliper, B&B	10.000 EACH	_____.	_____.
0194	632.9101 Landscape Planting Surveillance and Care Cycles	10.000 EACH	_____.	_____.
0196	634.0814 Posts Tubular Steel 2x2-Inch X 14-FT	31.000 EACH	_____.	_____.
0198	634.0816 Posts Tubular Steel 2x2-Inch X 16-FT	24.000 EACH	_____.	_____.
0200	637.2210 Signs Type II Reflective H	267.000 SF	_____.	_____.
0202	637.2230 Signs Type II Reflective F	46.000 SF	_____.	_____.
0204	638.2102 Moving Signs Type II	14.000 EACH	_____.	_____.
0206	638.2602 Removing Signs Type II	52.000 EACH	_____.	_____.
0208	638.3000 Removing Small Sign Supports	50.000 EACH	_____.	_____.
0210	643.0300 Traffic Control Drums	55,950.000 DAY	_____.	_____.
0212	643.0410 Traffic Control Barricades Type II	2,862.000 DAY	_____.	_____.
0214	643.0420 Traffic Control Barricades Type III	10,488.000 DAY	_____.	_____.
0216	643.0705 Traffic Control Warning Lights Type A	14,829.000 DAY	_____.	_____.
0218	643.0715 Traffic Control Warning Lights Type C	9,654.000 DAY	_____.	_____.
0220	643.0900 Traffic Control Signs	17,282.000 DAY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20190312040 Project(s): 4996-01-79

Federal ID(s): WISC 2019173

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0222	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0224	644.1410.S Temporary Pedestrian Surface Asphalt	1,250.000 SF	_____.	_____.
0226	644.1601.S Temporary Curb Ramp	6.000 EACH	_____.	_____.
0228	644.1616.S Temporary Pedestrian Safety Fence	200.000 LF	_____.	_____.
0230	646.1020 Marking Line Epoxy 4-Inch	11,953.000 LF	_____.	_____.
0232	646.3020 Marking Line Epoxy 8-Inch	1,891.000 LF	_____.	_____.
0234	646.5020 Marking Arrow Epoxy	34.000 EACH	_____.	_____.
0236	646.5120 Marking Word Epoxy	4.000 EACH	_____.	_____.
0238	646.5220 Marking Symbol Epoxy	17.000 EACH	_____.	_____.
0240	646.5320 Marking Railroad Crossings Epoxy	2.000 EACH	_____.	_____.
0242	646.6120 Marking Stop Line Epoxy 18-Inch	230.000 LF	_____.	_____.
0244	646.7120 Marking Diagonal Epoxy 12-Inch	195.000 LF	_____.	_____.
0246	646.7420 Marking Crosswalk Epoxy Transverse Line 6-Inch	1,605.000 LF	_____.	_____.
0248	646.8220 Marking Island Nose Epoxy	20.000 EACH	_____.	_____.
0250	646.9000 Marking Removal Line 4-Inch	138.000 LF	_____.	_____.
0252	649.0150 Temporary Marking Line Removable Tape 4-Inch	21,000.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20190312040 Project(s): 4996-01-79

Federal ID(s): WISC 2019173

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0254	650.4000 Construction Staking Storm Sewer	47.000 EACH	_____.	_____.
0256	650.4500 Construction Staking Subgrade	3,954.000 LF	_____.	_____.
0258	650.7000 Construction Staking Concrete Pavement	3,954.000 LF	_____.	_____.
0260	650.8500 Construction Staking Electrical Installations (project) 01. 4996-01-79	LS	LUMP SUM	_____.
0262	650.9910 Construction Staking Supplemental Control (project) 01. 4996-01-79	LS	LUMP SUM	_____.
0264	650.9920 Construction Staking Slope Stakes	3,954.000 LF	_____.	_____.
0266	652.0225 Conduit Rigid Nonmetallic Schedule 40 2-Inch	4,059.000 LF	_____.	_____.
0268	652.0235 Conduit Rigid Nonmetallic Schedule 40 3-Inch	1,607.000 LF	_____.	_____.
0270	653.0115 Pull Boxes Steel 12x36-Inch	6.000 EACH	_____.	_____.
0272	653.0140 Pull Boxes Steel 24x42-Inch	12.000 EACH	_____.	_____.
0274	654.0101 Concrete Bases Type 1	4.000 EACH	_____.	_____.
0276	654.0102 Concrete Bases Type 2	4.000 EACH	_____.	_____.
0278	654.0105 Concrete Bases Type 5	34.000 EACH	_____.	_____.
0280	654.0113 Concrete Bases Type 13	4.000 EACH	_____.	_____.
0282	654.0217 Concrete Control Cabinet Bases Type 9 Special	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20190312040 Project(s): 4996-01-79

Federal ID(s): WISC 2019173

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0284	654.0230 Concrete Control Cabinet Bases Type L30	1.000 EACH	_____.	_____.
0286	655.0230 Cable Traffic Signal 5-14 AWG	435.000 LF	_____.	_____.
0288	655.0240 Cable Traffic Signal 7-14 AWG	362.000 LF	_____.	_____.
0290	655.0260 Cable Traffic Signal 12-14 AWG	669.000 LF	_____.	_____.
0292	655.0270 Cable Traffic Signal 15-14 AWG	674.000 LF	_____.	_____.
0294	655.0290 Cable Traffic Signal 21-14 AWG	671.000 LF	_____.	_____.
0296	655.0515 Electrical Wire Traffic Signals 10 AWG	1,089.000 LF	_____.	_____.
0298	655.0610 Electrical Wire Lighting 12 AWG	3,060.000 LF	_____.	_____.
0300	655.0620 Electrical Wire Lighting 8 AWG	5,163.000 LF	_____.	_____.
0302	655.0625 Electrical Wire Lighting 6 AWG	15,537.000 LF	_____.	_____.
0304	655.0700 Loop Detector Lead In Cable	48.000 LF	_____.	_____.
0306	656.0200 Electrical Service Meter Breaker Pedestal (location) 01. 15th Street Signal Cabinet	LS	LUMP SUM	_____.
0308	656.0200 Electrical Service Meter Breaker Pedestal (location) 02. 15th Street Lighting Cabinet	LS	LUMP SUM	_____.
0310	657.0100 Pedestal Bases	4.000 EACH	_____.	_____.
0312	657.0315 Poles Type 4	4.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20190312040 Project(s): 4996-01-79

Federal ID(s): WISC 2019173

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0314	657.0355 Poles Type 12	4.000 EACH	_____.	_____.
0316	657.0430 Traffic Signal Standards Aluminum 10-FT	4.000 EACH	_____.	_____.
0318	657.0545 Monotube Arms 45-FT	3.000 EACH	_____.	_____.
0320	657.0550 Monotube Arms 50-FT	1.000 EACH	_____.	_____.
0322	658.0173 Traffic Signal Face 3S 12-Inch	12.000 EACH	_____.	_____.
0324	658.0174 Traffic Signal Face 4S 12-Inch	8.000 EACH	_____.	_____.
0326	658.0416 Pedestrian Signal Face 16-Inch	8.000 EACH	_____.	_____.
0328	658.0500 Pedestrian Push Buttons	8.000 EACH	_____.	_____.
0330	658.5069 Signal Mounting Hardware (location) 01. 15th Street	LS	LUMP SUM	_____.
0332	659.2130 Lighting Control Cabinets 120/240 30- Inch	1.000 EACH	_____.	_____.
0334	690.0150 Sawing Asphalt	1,304.000 LF	_____.	_____.
0336	690.0250 Sawing Concrete	1,769.000 LF	_____.	_____.
0338	715.0415 Incentive Strength Concrete Pavement	6,410.000 DOL	1.00000	6,410.00
0340	715.0710 Optimized Aggregate Gradation Incentive	15,469.000 DOL	1.00000	15,469.00
0342	740.0440 Incentive IRI Ride	2,325.000 DOL	1.00000	2,325.00
0344	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	2,000.000 HRS	5.00000	10,000.00



Proposal Schedule of Items

Proposal ID: 20190312040 Project(s): 4996-01-79

Federal ID(s): WISC 2019173

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0346	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	1,320.000 HRS	5.00000	6,600.00
0348	SPV.0060 Special 01. Storm Sewer Manhole Cover Type J-Modified	15.000 EACH	_____.	_____.
0350	SPV.0060 Special 02. Internal Chimney Seals	16.000 EACH	_____.	_____.
0352	SPV.0060 Special 03. Sanitary Manhole Reconstructs	8.000 EACH	_____.	_____.
0354	SPV.0060 Special 05. Traffic Signal Controller and Cabinet	1.000 EACH	_____.	_____.
0356	SPV.0060 Special 09. Lighting Assembly Single Fixture	17.000 EACH	_____.	_____.
0358	SPV.0060 Special 10. Lighting Assembly Twin Fixture	17.000 EACH	_____.	_____.
0360	SPV.0060 Special 11. LED Luminaires	4.000 EACH	_____.	_____.
0362	SPV.0060 Special 12. Luminaire Arms Steel 10-FT	4.000 EACH	_____.	_____.
0364	SPV.0060 Special 23. Adjusting Water Valve Boxes	17.000 EACH	_____.	_____.
0366	SPV.0075 Special 01. Street Sweeping	50.000 HRS	_____.	_____.
0368	SPV.0090 Special 01. Concrete Curb and Gutter 20-Inch, Type A	3,320.000 LF	_____.	_____.
0370	SPV.0090 Special 02. Concrete Curb and Gutter 20-Inch, Type A Integral	6,798.000 LF	_____.	_____.
0372	SPV.0090 Special 03. Concrete Curb and Gutter 20-Inch, Type D	430.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20190312040 Project(s): 4996-01-79

Federal ID(s): WISC 2019173

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0374	SPV.0090 Special 04. Concrete Curb and Gutter 32-Inch, Type D	622.000 LF	_____.	_____.
0376	SPV.0090 Special 05. Televising Storm Sewer	3,963.000 LF	_____.	_____.
0378	SPV.0090 Special 06. Bore And Jack Storm Sewer Installation 24-Inch	110.000 LF	_____.	_____.
0380	SPV.0090 Special 07. Storm Sewer Lateral 6-Inch	5.000 LF	_____.	_____.
0382	SPV.0090 Special 08. Storm Sewer Lateral 10-Inch	39.000 LF	_____.	_____.
0384	SPV.0090 Special 09. Storm Sewer Lateral 12-Inch	5.000 LF	_____.	_____.
0386	SPV.0090 Special 10. Sanitary Sewer Cured-In-Place Liner	1,536.000 LF	_____.	_____.
0388	SPV.0090 Special 11. Sanitary Sewer 8-Inch	75.000 LF	_____.	_____.
0390	SPV.0090 Special 12. Salvage and Reset Fence	15.000 LF	_____.	_____.
0392	SPV.0090 Special 15. Televising Sanitary Sewer	1,611.000 LF	_____.	_____.
0394	SPV.0105 Special 02. Grading and Shaping for Temporary Widening and Temporary Crossovers	LS	LUMP SUM	_____.
0396	SPV.0105 Special 05. Construction Staking Sanitary Sewer	LS	LUMP SUM	_____.
0398	SPV.0105 Special 10. Vehicular Video Detection System 4-Camera	LS	LUMP SUM	_____.
0400	SPV.0105 Special 11. Traffic Signal Preemption and Priority Control System	LS	LUMP SUM	_____.



Proposal Schedule of Items

Proposal ID: 20190312040 Project(s): 4996-01-79

Federal ID(s): WISC 2019173

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0402	SPV.0105 Special 15. Research and Locate Existing Land Parcel Monuments	LS	LUMP SUM	_____.
0404	SPV.0105 Special 16. Verify and Replace Existing Land Parcel Monuments	LS	LUMP SUM	_____.
0406	SPV.0105 Special 17. Staking Proposed Right-of-Way Monuments	LS	LUMP SUM	_____.
0408	SPV.0120 Special 01. Water for Seeded Areas	16.000 MGAL	_____.	_____.
0410	SPV.0195 Special 01. Excavation, Hauling and Disposal of Petroleum-Contaminated Soil	885.000 TON	_____.	_____.
0412	SPV.0200 Special 02. Sanitary Sewer Manhole Liner	66.000 VF	_____.	_____.
0414	460.6224 HMA Pavement 4 MT 58-28 S	307.000 TON	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.