



Wisconsin Department of Transportation

January 9, 2020

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #23: 1196-00-63, WISC 2019 810
Minong - Solon Springs
CTH T To St Croix Rvr (NB)
USH 53
Douglas County

1198-00-77, WISC 2019811
Minong - Solon Springs
CTH Y Intersection
USH 53
Douglas County

Letting of January 14, 2020

This is Addendum No.1, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
3	Prosecution and Progress

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
305.0110	Base Aggregate Dense 3/4-Inch	TON	5,180	25	5,205
305.0120	Base Aggregate Dense 1 1/4-Inch	TON	5,678	252	5,930
311.0115	Breaker Run	CY	1,990	80	2,070
624.0100	Water	MGA L	220	5	225
646.1545	Marking Line Grooved Wet Reflective Contrast Epoxy 4-Inch	LF	7,320	445	7,765
646.9000	Marking Removal Line 4-Inch	LF	7,600	-7,155	445
649.0150	Temporary Marking Line Removable Tape 4-Inch	LF	955	2,605	3,560

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
649.0105	Temporary Marking Line Paint 4-Inch	LF	0	27,600	27,600

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
614.0010	Barrier System Grading Shaping Finishing	EACH	1	-1	0

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
8	Typical Sections (Added Cut section to show typical at beam guard location)
65	Miscellaneous Quantities (Revised Base Aggregate Table)
68	Miscellaneous Quantities (Revised Pavement Marking Table)
69	Miscellaneous Quantities (Revised Traffic Control Table – Marking Line & Tape)

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01
1196-00-63, 1198-00-77
January 9, 2020

Special Provisions

3. Prosecution and Progress

Replace paragraph five with the following:

Regarding paving, temporary pavement marking and same day pavement marking operations: The center joint of each layer of pavement must match the existing centerline of the highway. Temporary centerline pavement marking must be within 6" of the existing centerline of the highway.

Schedule of Items

Attached, dated January 9, 2020, are the revised Schedule of Items Pages 1 – 9.


Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:
Revised: 8, 65, 68, and 69.

END OF ADDENDUM

Addendum No. 01
 ID 1196-00-63
 Revised Sheet 8
 January 9, 2020


USH 53 SB

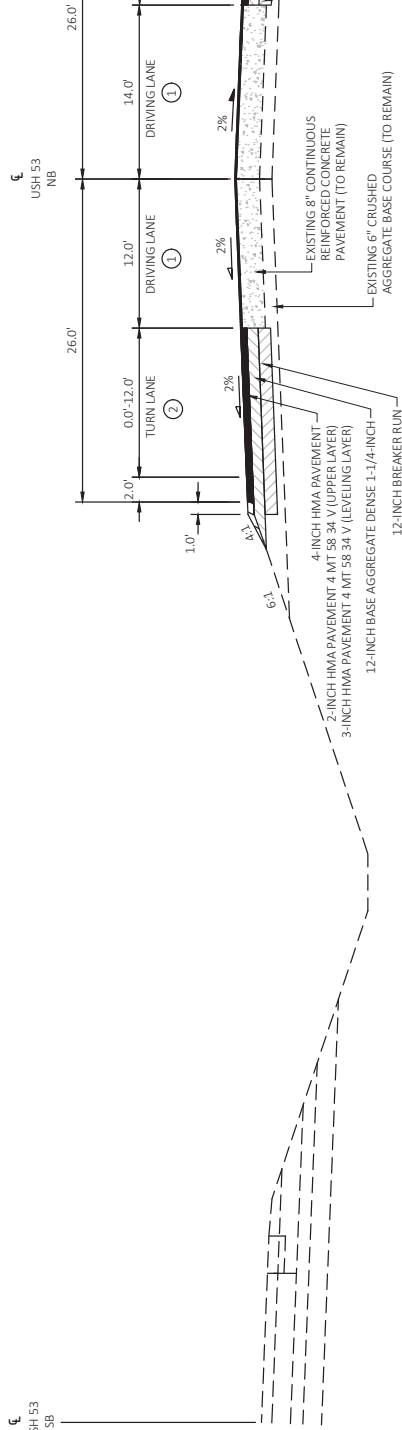

FINISHED TYPICAL SECTION


USH 53 NB
 TURN LANE ONTO CTH Y
 STA 528+97 - STA 536+47 (NB RT TURN)
 STA 535+73 - STA 543+31 (NB LT TURN)

USH 53 SB

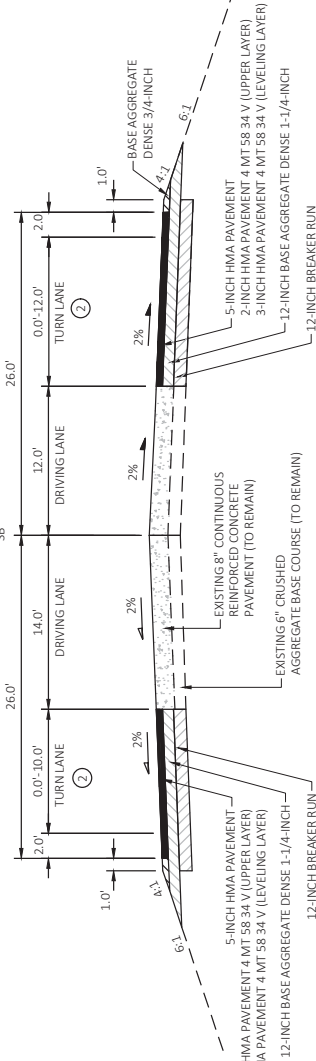

FINISHED TYPICAL SECTION

USH 53 SB
 TURN LANE ONTO CTH Y
 STA 693+94 - STA 701+59 (SB LT TURN)
 STA 700+82 - STA 708+32 (SB RT TURN)

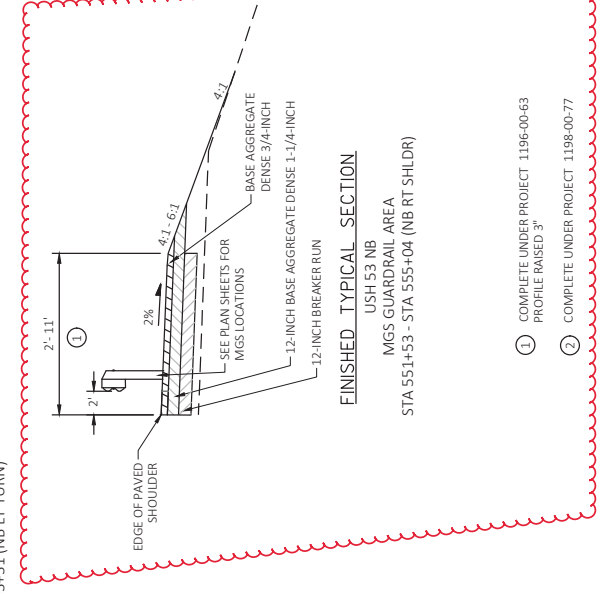

FINISHED TYPICAL SECTION

USH 53 NB
 MGS GUARDRAIL AREA
 STA 551+53 - STA 555+04 (NB RT SHLDR)

- ① COMPLETE UNDER PROJECT 1196-00-63
PROFILE RAISED 3"
- ② COMPLETE UNDER PROJECT 1198-00-77

PROJECT NO: 1196-00-63, 1198-00-77

HWY: USH 53

COUNTY: DOUGLAS

PLAN: TYPICAL SECTIONS

SHEET 8

FILE NAME: Y:\UZ\W\IT\HW\47129\C\MI_3D\11960063\3\SHETS\PLAN\0200115.DWG

DATE: 1/8/2020 1:08 PM

PLOT BY: DEAN V. STODOLA

PLOT SCALE: 1 IN.=10 FT

WISDOT/CADDIS SHEET 42

Addendum No. 01
 ID 1196-00-63
 Revised Sheet 65
 January 9, 2020

CURB & GUTTER				FINISHING ROADWAY			
STATION - STATION	LOCATION	LF	LF	STATION - STATION	LOCATION	LF	LF
US 53 NB 523+13 NB - 523+74 NB	RT	94	94	213.0100 (PROJECT)	EA	1	1
524+01 NB - 524+32 NB	RT	90	86	US 53 NB	EA	1	1
ITEM TOTAL		184	182	ITEM TOTAL		1	1

CURE & SEAL TREATMENT			
STATION - STATION	LOCATION	LF	LF
US 53 NB 523+13 NB - 523+74 NB	RT	94	94
524+01 NB - 524+32 NB	RT	90	86
ITEM TOTAL		184	182

CONSTRUCTION CURB & GUTTER			
STATION - STATION	LOCATION	LF	LF
US 53 NB 523+13 NB - 523+74 NB	RT	94	94
524+01 NB - 524+32 NB	RT	90	86
ITEM TOTAL		184	182

SPV 0090.02 CURE & SEAL TREATMENT			
STATION - STATION	LOCATION	LF	LF
US 53 NB 523+13 NB - 523+74 NB	RT	94	94
524+01 NB - 524+32 NB	RT	90	86
ITEM TOTAL		184	182

CONCRETE STAKING CURB & GUTTER			
STATION - STATION	LOCATION	LF	LF
US 53 NB 523+13 NB - 523+74 NB	RT	94	94
524+01 NB - 524+32 NB	RT	90	86
ITEM TOTAL		184	182

PREPARE FOUNDATION FOR ASPHALTIC PAVING			
STATION - STATION	LOCATION	SY	SY
US 53 NB 279+15 NB - 555+01 NB	LS	578	578
ITEM TOTAL		578	578

REMOVING INLET			
STATION - STATION	LOCATION	EA	EA
US 53 NB 554+50 - 554+90	RT	13	13
ITEM TOTAL		13	13

REMOVING SURFACE DRAINS			
STATION - STATION	LOCATION	EA	EA
US 53 NB 554+50 - 554+90	RT	13	13
ITEM TOTAL		13	13

REMOVING ASPHALTIC SURFACE BUTT JOINTS			
STATION - STATION	LOCATION	SY	SY
US 53 NB 279+15 - 280+65	LT/RT	583	583
313+68	LT	83	83
374+32	LT	128	128
374+32	RT	84	84
384+50	LT	80	80
405+59	LT	80	80
436+72	LT	79	79
451+12	LT	80	80
478+40	LT	176	176
497+40	LT	186	186
523+88	RT	339	339
523+93	RT	297	297
552+64 - 554+64	LT/RT	200	200
ITEM TOTALS		2365	2365

FOUNDATION FOR ASPHALTIC SHOULDERS			
STATION - STATION	LOCATION	STA	STA
US 53 NB 279+15 - 314+00	LT	35	35
314+00 - 314+00	RT	35	35
314+00 - 374+50	LT	61	61
314+00 - 374+50	RT	61	61
374+50 - 384+50	LT	10	10
374+50 - 384+50	RT	10	10
384+50 - 405+50	LT	21	21
384+50 - 405+50	RT	21	21
405+50 - 437+00	LT	32	32
405+50 - 437+00	RT	32	32
437+00 - 451+00	LT	14	14
437+00 - 451+00	RT	14	14
451+00 - 528+97	LT	78	78
451+00 - 528+97	RT	78	78
545+80 - 554+60	LT	9	9
545+80 - 554+60	RT	9	9
UNDISTRIBUTED	LT/RT	5	5
ITEM TOTALS		525	525

SHOULDERS			
STATION - STATION	LOCATION	STA	STA
US 53 NB 279+15 - 314+00	LT	35	35
314+00 - 314+00	RT	35	35
314+00 - 374+50	LT	61	61
314+00 - 374+50	RT	61	61
374+50 - 384+50	LT	10	10
374+50 - 384+50	RT	10	10
384+50 - 405+50	LT	21	21
384+50 - 405+50	RT	21	21
405+50 - 437+00	LT	32	32
405+50 - 437+00	RT	32	32
437+00 - 451+00	LT	14	14
437+00 - 451+00	RT	14	14
451+00 - 528+97	LT	78	78
451+00 - 528+97	RT	78	78
545+80 - 554+60	LT	9	9
545+80 - 554+60	RT	9	9
UNDISTRIBUTED	LT/RT	5	5
ITEM TOTALS		525	525

REMARKS			
STATION - STATION	LOCATION	REMARKS	REMARKS
US 53 NB 279+15 - 314+00	LT	PROJECT BEGIN - ANTLER INN RD	PROJECT BEGIN - ANTLER INN RD
314+00 - 314+00	RT	PROJECT BEGIN - ANTLER INN RD	PROJECT BEGIN - ANTLER INN RD
314+00 - 374+50	LT	ANTLER INN RD - MOSINEE SPUR RD	ANTLER INN RD - MOSINEE SPUR RD
314+00 - 374+50	RT	ANTLER INN RD - MOSINEE SPUR RD	ANTLER INN RD - MOSINEE SPUR RD
374+50 - 384+50	LT	MOSINEE SPUR RD - BERGEN SPRING RD	MOSINEE SPUR RD - BERGEN SPRING RD
374+50 - 384+50	RT	MOSINEE SPUR RD - BERGEN SPRING RD	MOSINEE SPUR RD - BERGEN SPRING RD
384+50 - 405+50	LT	BERGEN SPRING RD - LEES RD	BERGEN SPRING RD - LEES RD
384+50 - 405+50	RT	BERGEN SPRING RD - LEES RD	BERGEN SPRING RD - LEES RD
405+50 - 437+00	LT	LEES RD - HARRIET LAKE RD	LEES RD - HARRIET LAKE RD
405+50 - 437+00	RT	LEES RD - HARRIET LAKE RD	LEES RD - HARRIET LAKE RD
437+00 - 451+00	LT	HARRIET LAKE RD - LYNCH RD	HARRIET LAKE RD - LYNCH RD
437+00 - 451+00	RT	HARRIET LAKE RD - LYNCH RD	HARRIET LAKE RD - LYNCH RD
451+00 - 528+97	LT	LYNCH RD - BEGIN PROJECT 1196-00-77	LYNCH RD - BEGIN PROJECT 1196-00-77
451+00 - 528+97	RT	LYNCH RD - BEGIN PROJECT 1196-00-77	LYNCH RD - BEGIN PROJECT 1196-00-77
545+80 - 554+60	LT	END PROJECT 1196-00-77 - END PROJECT 1196-00-63	END PROJECT 1196-00-77 - END PROJECT 1196-00-63
545+80 - 554+60	RT	END PROJECT 1196-00-77 - END PROJECT 1196-00-63	END PROJECT 1196-00-77 - END PROJECT 1196-00-63
UNDISTRIBUTED	LT/RT	END PROJECT 1196-00-77 - END PROJECT 1196-00-63	END PROJECT 1196-00-77 - END PROJECT 1196-00-63

BASE AGGREGATE DENSE			
STATION - STATION	LOCATION	TON	TON
US 53 NB 279+15 - 313+29	LT	314	6
279+15 - 314+00	RT	332	7
313+72	RT	16	0.5
314+08 - 374+26	LT	554	11
314+08 - 374+26	RT	576	12
374+78 - 384+00	LT	113	2
374+78 - 384+00	RT	70	1
384+75 - 405+23	LT	250	5
384+75 - 405+23	RT	151	3
405+95 - 436+36	LT	280	6
405+95 - 436+36	RT	297	6
428+72	RT	19	1
437+18 - 450+75	LT	166	3
437+18 - 451+00	RT	84	2
451+55 - 478+15	LT	245	5
451+55 - 478+15	RT	333	7
478+75 - 497+50	LT	177	0.5
478+75 - 497+50	RT	171	3
497+50 - 523+70	LT	188	4
497+50 - 523+70	RT	239	5
524+05 - 528+60	LT	35	1
524+05 - 528+60	RT	43	1
524+25 - 528+97	LT	66	2
524+25 - 528+97	RT	66	2
545+80 - 554+64	LT	8	0
545+80 - 554+64	RT	25	5
554+64 - 554+64	LT	252	5
554+64 - 554+64	RT	252	5
ITEM TOTALS		360	100

REMARKS			
STATION - STATION	LOCATION	REMARKS	REMARKS
US 53 NB 279+15 - 313+29	LT	LEVELING / SHAPING	LEVELING / SHAPING
279+15 - 314+00	RT	LEVELING / SHAPING	LEVELING / SHAPING
313+72	RT	LEVELING / SHAPING	LEVELING / SHAPING
314+08 - 374+26	LT	LEVELING / SHAPING	LEVELING / SHAPING
314+08 - 374+26	RT	LEVELING / SHAPING	LEVELING / SHAPING
374+78 - 384+00	LT	LEVELING / SHAPING	LEVELING / SHAPING
374+78 - 384+00	RT	LEVELING / SHAPING	LEVELING / SHAPING
384+75 - 405+23	LT	LEVELING / SHAPING	LEVELING / SHAPING
384+75 - 405+23	RT	LEVELING / SHAPING	LEVELING / SHAPING
405+95 - 436+36	LT	LEVELING / SHAPING	LEVELING / SHAPING
405+95 - 436+36	RT	LEVELING / SHAPING	LEVELING / SHAPING
428+72	RT	LEVELING / SHAPING	LEVELING / SHAPING
437+18 - 450+75	LT	LEVELING / SHAPING	LEVELING / SHAPING
437+18 - 451+00	RT	LEVELING / SHAPING	LEVELING / SHAPING
451+55 - 478+15	LT	LEVELING / SHAPING	LEVELING / SHAPING
451+55 - 478+15	RT	LEVELING / SHAPING	LEVELING / SHAPING
478+75 - 497+50	LT	LEVELING / SHAPING	LEVELING / SHAPING
478+75 - 497+50	RT	LEVELING / SHAPING	LEVELING / SHAPING
497+50 - 523+70	LT	LEVELING / SHAPING	LEVELING / SHAPING
497+50 - 523+70	RT	LEVELING / SHAPING	LEVELING / SHAPING
524+05 - 528+60	LT	LEVELING / SHAPING	LEVELING / SHAPING
524+05 - 528+60	RT	LEVELING / SHAPING	LEVELING / SHAPING
524+25 - 528+97	LT	LEVELING / SHAPING	LEVELING / SHAPING
524+25 - 528+97	RT	LEVELING / SHAPING	LEVELING / SHAPING
545+80 - 554+64	LT	LEVELING / SHAPING	LEVELING / SHAPING
545+80 - 554+64	RT	LEVELING / SHAPING	LEVELING / SHAPING
554+64 - 554+64	LT	INSTALLATION	INSTALLATION
554+64 - 554+64	RT	INSTALLATION	INSTALLATION

BEAMGUARD			
STATION - STATION	LOCATION	LF	LF
US 53 NB 554+64 - 554+64	LT	80	80
554+64 - 554+64	RT	80	80
ITEM TOTALS		160	160

INCLUDES AROUND SIDE ROAD RADI			
STATION - STATION	LOCATION	LF	LF
US 53 NB 554+64 - 554+64	LT	80	80
554+64 - 554+64	RT	80	80
ITEM TOTALS		160	160

* BREAKER RUN USE AT BEAMGUARD LOCATION IS TO BE VERIFIED BY THE ENGINEER.



Proposal Schedule of Items

Proposal ID: 20200114023 Project(s): 1196-00-63, 1198-00-77

Federal ID(s): WISC 2019811, WISC 2019810

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	203.0100 Removing Small Pipe Culverts	3.000 EACH	_____.	_____.
0004	204.0100 Removing Pavement	13.000 SY	_____.	_____.
0006	204.0105 Removing Pavement Butt Joints	578.000 SY	_____.	_____.
0008	204.0115 Removing Asphaltic Surface Butt Joints	2,870.000 SY	_____.	_____.
0010	204.0150 Removing Curb & Gutter	802.000 LF	_____.	_____.
0012	204.0165 Removing Guardrail	136.000 LF	_____.	_____.
0014	204.0180 Removing Delineators and Markers	75.000 EACH	_____.	_____.
0016	204.0190 Removing Surface Drains	1.000 EACH	_____.	_____.
0018	204.0280 Sealing Pipes	1.000 EACH	_____.	_____.
0020	205.0100 Excavation Common	6,882.000 CY	_____.	_____.
0022	211.0100 Prepare Foundation for Asphaltic Paving (project) 01. 1196-00-63	LS	LUMP SUM	_____.
0024	211.0400 Prepare Foundation for Asphaltic Shoulders	540.000 STA	_____.	_____.
0026	213.0100 Finishing Roadway (project) 01. 1196-00-63	1.000 EACH	_____.	_____.
0028	213.0100 Finishing Roadway (project) 02. 1198-00-77	1.000 EACH	_____.	_____.
0030	305.0110 Base Aggregate Dense 3/4-Inch	5,205.000 TON	_____.	_____.
0032	305.0120 Base Aggregate Dense 1 1/4-Inch	5,930.000 TON	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20200114023 Project(s): 1196-00-63, 1198-00-77

Federal ID(s): WISC 2019811, WISC 2019810

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0034	305.0500 Shaping Shoulders	540.000 STA	_____.	_____.
0036	311.0115 Breaker Run	2,070.000 CY	_____.	_____.
0038	415.0070 Concrete Pavement 7-Inch	30.000 SY	_____.	_____.
0040	416.1010 Concrete Surface Drains	3.500 CY	_____.	_____.
0042	455.0605 Tack Coat	14,805.000 GAL	_____.	_____.
0044	460.0105.S HMA Percent Within Limits (PWL) Test Strip Volumetrics	1.000 EACH	_____.	_____.
0046	460.0110.S HMA Percent Within Limits (PWL) Test Strip Density	1.000 EACH	_____.	_____.
0048	460.2000 Incentive Density HMA Pavement	11,550.000 DOL	1.00000	11,550.00
0050	460.2005 Incentive Density PWL HMA Pavement	7,290.000 DOL	1.00000	7,290.00
0052	460.2010 Incentive Air Voids HMA Pavement	8,970.000 DOL	1.00000	8,970.00
0054	460.4110.S Reheating HMA Pavement Longitudinal Joints	27,550.000 LF	_____.	_____.
0056	460.6644 HMA Pavement 4 MT 58-34 V	18,035.000 TON	_____.	_____.
0058	465.0105 Asphaltic Surface	3,505.000 TON	_____.	_____.
0060	465.0110 Asphaltic Surface Patching	350.000 TON	_____.	_____.
0062	465.0315 Asphaltic Flumes	34.000 SY	_____.	_____.
0064	465.0400 Asphaltic Shoulder Rumble Strips	47,600.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20200114023 Project(s): 1196-00-63, 1198-00-77

Federal ID(s): WISC 2019811, WISC 2019810

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0066	520.8700 Cleaning Culvert Pipes	13.000 EACH	_____.	_____.
0068	522.0124 Culvert Pipe Reinforced Concrete Class III 24-Inch	76.000 LF	_____.	_____.
0070	522.0424 Culvert Pipe Reinforced Concrete Class IV 24-Inch	176.000 LF	_____.	_____.
0072	522.1024 Apron Endwalls for Culvert Pipe Reinforced Concrete 24-Inch	6.000 EACH	_____.	_____.
0074	524.0618 Apron Endwalls for Culvert Pipe Salvaged 18-Inch	1.000 EACH	_____.	_____.
0076	601.0557 Concrete Curb & Gutter 6-Inch Sloped 36-Inch Type D	502.000 LF	_____.	_____.
0078	606.0200 Riprap Medium	17.000 CY	_____.	_____.
0080	611.0430 Reconstructing Inlets	1.000 EACH	_____.	_____.
0082	611.0654 Inlet Covers Type V	1.000 EACH	_____.	_____.
0084	611.3004 Inlets 4-FT Diameter	1.000 EACH	_____.	_____.
0086	611.3225 Inlets 2x2.5-FT	1.000 EACH	_____.	_____.
0088	612.0218 Pipe Underdrain Unperforated 18-Inch	60.000 LF	_____.	_____.
0092	614.0400 Adjusting Steel Plate Beam Guard	160.000 LF	_____.	_____.
0094	614.2300 MGS Guardrail 3	125.000 LF	_____.	_____.
0096	614.2500 MGS Thrie Beam Transition	39.400 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20200114023 Project(s): 1196-00-63, 1198-00-77

Federal ID(s): WISC 2019811, WISC 2019810

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0098	614.2610 MGS Guardrail Terminal EAT	1.000 EACH	_____.	_____.
0100	618.0100 Maintenance And Repair of Haul Roads (project) 01. 1196-00-63	1.000 EACH	_____.	_____.
0102	618.0100 Maintenance And Repair of Haul Roads (project) 02. 1198-00-77	1.000 EACH	_____.	_____.
0104	619.1000 Mobilization	1.000 EACH	_____.	_____.
0106	624.0100 Water	225.000 MGAL	_____.	_____.
0108	625.0500 Salvaged Topsoil	16,335.000 SY	_____.	_____.
0110	627.0200 Mulching	17,250.000 SY	_____.	_____.
0112	628.1504 Silt Fence	2,205.000 LF	_____.	_____.
0114	628.1520 Silt Fence Maintenance	4,410.000 LF	_____.	_____.
0116	628.1905 Mobilizations Erosion Control	3.000 EACH	_____.	_____.
0118	628.1910 Mobilizations Emergency Erosion Control	3.000 EACH	_____.	_____.
0120	628.2004 Erosion Mat Class I Type B	6,355.000 SY	_____.	_____.
0122	628.2027 Erosion Mat Class II Type C	440.000 SY	_____.	_____.
0124	628.7010 Inlet Protection Type B	2.000 EACH	_____.	_____.
0126	628.7504 Temporary Ditch Checks	420.000 LF	_____.	_____.
0128	628.7555 Culvert Pipe Checks	3.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20200114023 Project(s): 1196-00-63, 1198-00-77

Federal ID(s): WISC 2019811, WISC 2019810

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0130	628.7560 Tracking Pads	2.000 EACH	_____.	_____.
0132	629.0210 Fertilizer Type B	10.100 CWT	_____.	_____.
0134	630.0120 Seeding Mixture No. 20	432.500 LB	_____.	_____.
0136	630.0200 Seeding Temporary	432.500 LB	_____.	_____.
0138	630.0500 Seed Water	374.000 MGAL	_____.	_____.
0140	633.0100 Delineator Posts Steel	115.000 EACH	_____.	_____.
0142	633.0500 Delineator Reflectors	155.000 EACH	_____.	_____.
0144	633.5200 Markers Culvert End	42.000 EACH	_____.	_____.
0146	634.0614 Posts Wood 4x6-Inch X 14-FT	4.000 EACH	_____.	_____.
0148	634.0616 Posts Wood 4x6-Inch X 16-FT	33.000 EACH	_____.	_____.
0150	634.0618 Posts Wood 4x6-Inch X 18-FT	28.000 EACH	_____.	_____.
0152	634.0620 Posts Wood 4x6-Inch X 20-FT	34.000 EACH	_____.	_____.
0154	637.2210 Signs Type II Reflective H	1,334.560 SF	_____.	_____.
0156	637.2230 Signs Type II Reflective F	252.000 SF	_____.	_____.
0158	638.2102 Moving Signs Type II	2.000 EACH	_____.	_____.
0160	638.2602 Removing Signs Type II	45.000 EACH	_____.	_____.
0162	638.3000 Removing Small Sign Supports	52.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20200114023 Project(s): 1196-00-63, 1198-00-77

Federal ID(s): WISC 2019811, WISC 2019810

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0164	642.5201 Field Office Type C	1.000 EACH	_____.	_____.
0166	643.0300 Traffic Control Drums	52,980.000 DAY	_____.	_____.
0168	643.0420 Traffic Control Barricades Type III	2,851.000 DAY	_____.	_____.
0170	643.0705 Traffic Control Warning Lights Type A	5,702.000 DAY	_____.	_____.
0172	643.0715 Traffic Control Warning Lights Type C	5,714.000 DAY	_____.	_____.
0174	643.0800 Traffic Control Arrow Boards	356.000 DAY	_____.	_____.
0176	643.0900 Traffic Control Signs	3,591.000 DAY	_____.	_____.
0178	643.1050 Traffic Control Signs PCMS	178.000 DAY	_____.	_____.
0180	643.1051 Traffic Control Signs PCMS with Cellular Communications	178.000 DAY	_____.	_____.
0182	643.5000 Traffic Control	2.000 EACH	_____.	_____.
0184	645.0120 Geotextile Type HR	61.000 SY	_____.	_____.
0186	646.1040 Marking Line Grooved Wet Ref Epoxy 4-Inch	57,855.000 LF	_____.	_____.
0188	646.1545 Marking Line Grooved Wet Ref Contrast Epoxy 4-Inch	7,765.000 LF	_____.	_____.
0190	646.3020 Marking Line Epoxy 8-Inch	193.000 LF	_____.	_____.
0192	646.3545 Marking Line Grooved Wet Ref Contrast Epoxy 8-Inch	4,272.000 LF	_____.	_____.
0194	646.5020 Marking Arrow Epoxy	2.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20200114023 Project(s): 1196-00-63, 1198-00-77

Federal ID(s): WISC 2019811, WISC 2019810

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0196	646.6120 Marking Stop Line Epoxy 18-Inch	134.000 LF	_____.	_____.
0198	646.6220 Marking Yield Line Epoxy 18-Inch	12.000 EACH	_____.	_____.
0200	646.7120 Marking Diagonal Epoxy 12-Inch	335.000 LF	_____.	_____.
0202	646.9000 Marking Removal Line 4-Inch	445.000 LF	_____.	_____.
0204	649.0150 Temporary Marking Line Removable Tape 4-Inch	3,560.000 LF	_____.	_____.
0206	650.4500 Construction Staking Subgrade	3,570.000 LF	_____.	_____.
0208	650.5000 Construction Staking Base	3,570.000 LF	_____.	_____.
0210	650.5500 Construction Staking Curb Gutter and Curb & Gutter	502.000 LF	_____.	_____.
0212	650.6000 Construction Staking Pipe Culverts	3.000 EACH	_____.	_____.
0214	650.8000 Construction Staking Resurfacing Reference	27,590.000 LF	_____.	_____.
0216	650.8500 Construction Staking Electrical Installations (project) 01. 1198-00-77	LS	LUMP SUM	_____.
0218	650.9910 Construction Staking Supplemental Control (project) 01. 1196-00-63	LS	LUMP SUM	_____.
0220	650.9910 Construction Staking Supplemental Control (project) 02. 1198-00-77	LS	LUMP SUM	_____.
0222	650.9920 Construction Staking Slope Stakes	3,875.000 LF	_____.	_____.
0224	652.0225 Conduit Rigid Nonmetallic Schedule 40 2-Inch	1,502.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20200114023 Project(s): 1196-00-63, 1198-00-77

Federal ID(s): WISC 2019811, WISC 2019810

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0226	652.0235 Conduit Rigid Nonmetallic Schedule 40 3-Inch	30.000 LF	_____.	_____.
0228	652.0605 Conduit Special 2-Inch	179.000 LF	_____.	_____.
0230	653.0154 Pull Boxes Non-Conductive 24x36-Inch	7.000 EACH	_____.	_____.
0232	653.0164 Pull Boxes Non-Conductive 24x42-Inch	5.000 EACH	_____.	_____.
0234	654.0106 Concrete Bases Type 6	8.000 EACH	_____.	_____.
0236	654.0224 Concrete Control Cabinet Bases Type L24	1.000 EACH	_____.	_____.
0238	655.0610 Electrical Wire Lighting 12 AWG	1,440.000 LF	_____.	_____.
0240	655.0620 Electrical Wire Lighting 8 AWG	6,750.000 LF	_____.	_____.
0242	656.0200 Electrical Service Meter Breaker Pedestal (location) STA 97+95 RT	LS	LUMP SUM	_____.
0244	657.0255 Transformer Bases Breakaway 11 1/2-Inch Bolt Circle	8.000 EACH	_____.	_____.
0246	657.0327 Poles Type 6-Aluminum	8.000 EACH	_____.	_____.
0248	657.0715 Luminaire Arms Truss Type 4 1/2-Inch Clamp 15-FT	8.000 EACH	_____.	_____.
0250	659.1120 Luminaires Utility LED B	8.000 EACH	_____.	_____.
0252	659.2124 Lighting Control Cabinets 120/240 24-Inch	1.000 EACH	_____.	_____.
0254	690.0150 Sawing Asphalt	6,191.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20200114023 Project(s): 1196-00-63, 1198-00-77

Federal ID(s): WISC 2019811, WISC 2019810

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0256	690.0250 Sawing Concrete	46.000 LF	_____.	_____.
0258	715.0415 Incentive Strength Concrete Pavement	500.000 DOL	1.00000	500.00
0260	740.0440 Incentive IRI Ride	20,900.000 DOL	1.00000	20,900.00
0262	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	2,400.000 HRS	5.00000	12,000.00
0264	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	990.000 HRS	5.00000	4,950.00
0266	SPV.0090 Special 01. Ditch Cleaning	920.000 LF	_____.	_____.
0268	SPV.0090 Special 02. Concrete Curb and Gutter Cure and Seal Treatment	502.000 LF	_____.	_____.
0270	SPV.0105 Special 01. Material Transfer Vehicle, Project 1196-03-63	LS	LUMP SUM	_____.
0272	SPV.0105 Special 02. Milling and Removing Temporary Joint	LS	LUMP SUM	_____.
0274	649.0105 Temporary Marking Line Paint 4-Inch	27,600.000 LF	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.