



# Wisconsin Department of Transportation

July 8, 2020

## Division of Transportation Systems Development

Bureau of Project Development  
4822 Madison Yards Way, 4<sup>th</sup> Floor South  
Madison, WI 53705

Telephone: (608) 266-1631  
Facsimile (FAX): (608) 266-8459

### NOTICE TO ALL CONTRACTORS:

**Proposal #12: 8010-00-70, WISC 2020 286**  
**Village of Superior, Tower Avenue**  
**69<sup>th</sup> Street to 64<sup>th</sup> Street**  
**STH 35**  
**Douglas County**

### Letting of July 14, 2020

This is Addendum No. 01, which provides for the following:

#### Special Provisions:

Deleted Special Provisions	
Article No.	Description
15	QMP HMA Pavement Nuclear Density.

#### Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
460.2000	Incentive Density HMA Pavement	DOL	2040	-750	1290

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
305.0500	Shaping Shoulders	STA	0	9	9

#### Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
5	Typical Sections – Hma Overlay Detail And Notes
38	Miscellaneous Quantities – Addition Of Item 305.0500 Shaping Shoulders

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

*Mike Coleman*

Proposal Development Specialist  
Proposal Management Section

**ADDENDUM NO. 01**  
**8010-00-70**  
**July 8, 2020**

**Special Provisions**

15. **DELETED**

**Schedule of Items**


Attached, dated July 8, 2020, are the revised Schedule of Items Pages 1 – 4.

**Plan Sheets**

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:  
Revised: 5 and 38.


END OF ADDENDUM

Addendum No. 01  
ID 8010-00-70  
Revised Sheet 5  
July 8, 2020

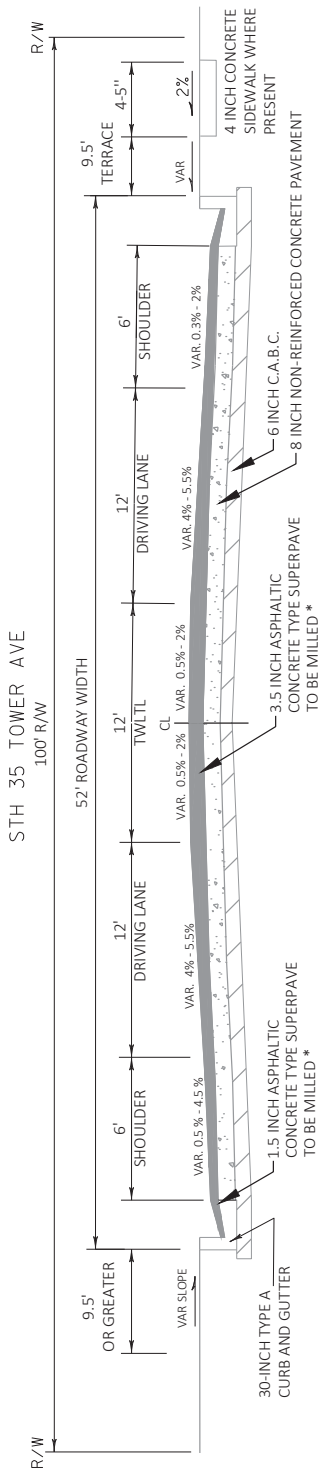

**EXISTING TYPICAL SECTION**  
STA 450+41.10 TO STA 475+39.00

\* MILLING SHOULD BE 3.5 INCHES OR UNTIL PCC IS ENCOUNTERED

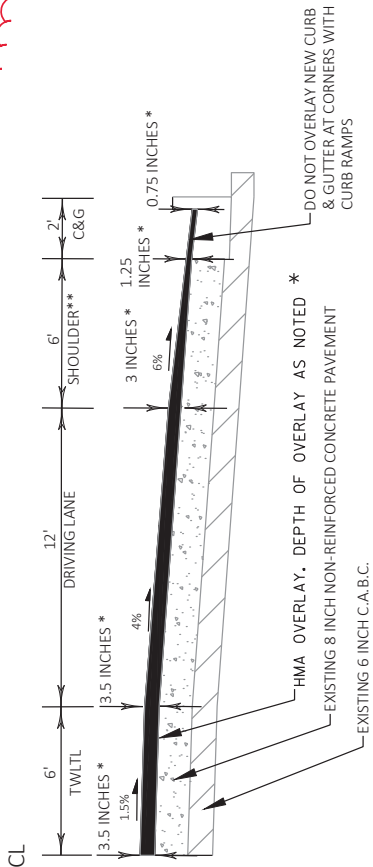


**HMA OVERLAY DETAIL**  
STA 450+41.10 TO STA 475+39.00

\*\* INCENTIVE DENSITY HMA PAVEMENT ITEM ONLY APPLIES TO TWLTL AND DRIVING LANES.  
\*\* URBAN SHOULDER DOES NOT MEET MINIMUM THICKNESS PER HMA SPECIFICATION.


*HMA OVERLAY THICKNESS			
	TWTL	INSIDE OF DRIVING LANE	OUTSIDE OF DRIVING LANE
LOWER LEVELING LAYER**	1.75"	1.75"	1.25"
UPPER LAYER	1.75"	1.75"	1.75"
TOTAL DEPTH	3.50"	3.50"	3.00"
		FLAG OF C&G	FLAG OF C&G
		0	0
		1.25"	0.75"
		1.25"	0.75"

**CONCRETE MILLING DETAIL**  
STA 450+41.10 TO STA 475+39.00

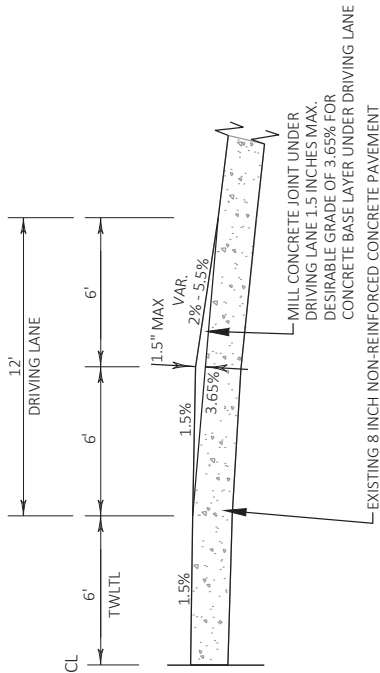

❖ QUANTITY FOUND ON  
MULTIPLE TABLES

HMA

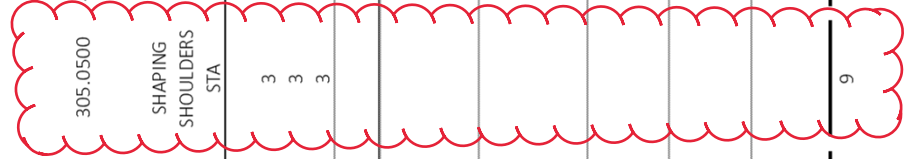

STATION TO	STATION	LOCATION	305.0110 BASE AGGREGATE DENSE 3/4- INCH	TON	305.0500 SHAPING SHOULDERS STA	455.0605 TACK COAT GAL	460.6444 HMA PAVEMENT 4 MT 58-34 H	TON	465.0105 ASPHALTIC SURFACE PATCHING	TON	465.0110 ASPHALTIC SURFACE PATCHING	TON	624.0100 WATER MGAL	REMARKS
447+80	- 450+25	69th S - LT	32	3										Shoulder patch for Stage 1 - West side
447+80	- 450+25	69th S - RT	32	3										Shoulder patch for Stage 2 - East side
448+50	- 450+41	Begin Project to N 69th	10	3	18		50				0.1			Final shoulders
448+50	- 450+84	Begin Project to N 69th		88			245		10					
450+84	- 455+80	N 69th to N 68th		201			563		10					
450+45	- 451+24	LT - N 69th		9			24							
450+45	- 451+24	RT - N 69th		9			24							
455+80	- 460+51	N 68th to N 67th		192			537		10					
455+38	- 456+22	LT - N 68th		9			25							
455+40	- 456+17	RT - N 68th		9			24							
460+12	- 460+93	RT - N 67th		9			24							
460+51	- 465+20	N 67th - N 66th		191			535		10					
464+77	- 465+64	LT - N 66th		9			23							
464+78	- 465+61	RT - N 66th		9			25							
465+20	- 470+04	N 66th - N 65th		197			550		10					
469+62	- 470+47	LT - N 65th		9			25							
469+65	- 470+44	RT - N 65th		9			24							
470+04	- 474+39	N 65th - End Project		177			494		10					wedging
448+51	- 474+39	various locations						100						
TOTAL 0010			74	9	1,145	3,192	60	120	60	0.1				

Addendum No. 01  
ID 8010-00-70  
Revised Sheet 38  
July 8, 2020



## Proposal Schedule of Items

Proposal ID: 20200714012 Project(s): 8010-00-70

Federal ID(s): WISC 2020286

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	204.0109.S Removing Concrete Surface Partial Depth	57,580.000 SF	_____.	_____.
0004	204.0110 Removing Asphaltic Surface	100.000 SY	_____.	_____.
0006	204.0115 Removing Asphaltic Surface Butt Joints	340.000 SY	_____.	_____.
0008	204.0120 Removing Asphaltic Surface Milling	16,110.000 SY	_____.	_____.
0010	204.0150 Removing Curb & Gutter	346.000 LF	_____.	_____.
0012	204.0155 Removing Concrete Sidewalk	100.000 SY	_____.	_____.
0014	205.0100 Excavation Common	27.000 CY	_____.	_____.
0016	209.2100 Backfill Granular Grade 2	63.000 CY	_____.	_____.
0018	211.0100 Prepare Foundation for Asphaltic Paving (project) 01. 8010-00-70	LS	LUMP SUM	_____.
0020	213.0100 Finishing Roadway (project) 01. 8010-00-70	1.000 EACH	_____.	_____.
0022	305.0110 Base Aggregate Dense 3/4-Inch	74.000 TON	_____.	_____.
0024	450.4000 HMA Cold Weather Paving	1,596.000 TON	_____.	_____.
0026	455.0605 Tack Coat	1,145.000 GAL	_____.	_____.
0028	460.2000 Incentive Density HMA Pavement	1,290.000 DOL	1.00000	1,290.00
0030	460.6444 HMA Pavement 4 MT 58-34 H	3,192.000 TON	_____.	_____.
0032	465.0105 Asphaltic Surface	124.000 TON	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20200714012 Project(s): 8010-00-70

Federal ID(s): WISC 2020286

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0034	465.0110 Asphaltic Surface Patching	60.000 TON	_____.	_____.
0036	601.0409 Concrete Curb & Gutter 30-Inch Type A	346.000 LF	_____.	_____.
0038	602.0415 Concrete Sidewalk 6-Inch	1,503.000 SF	_____.	_____.
0040	602.0515 Curb Ramp Detectable Warning Field Natural Patina	80.000 SF	_____.	_____.
0042	611.0430 Reconstructing Inlets	1.000 EACH	_____.	_____.
0044	618.0100 Maintenance And Repair of Haul Roads (project) 01. 8010-00-70	1.000 EACH	_____.	_____.
0046	619.1000 Mobilization	1.000 EACH	_____.	_____.
0048	624.0100 Water	0.100 MGAL	_____.	_____.
0050	625.0100 Topsoil	248.000 SY	_____.	_____.
0052	628.1905 Mobilizations Erosion Control	1.000 EACH	_____.	_____.
0054	628.1910 Mobilizations Emergency Erosion Control	1.000 EACH	_____.	_____.
0056	628.2006 Erosion Mat Urban Class I Type A	248.000 SY	_____.	_____.
0058	628.7015 Inlet Protection Type C	14.000 EACH	_____.	_____.
0060	629.0210 Fertilizer Type B	1.000 CWT	_____.	_____.
0062	630.0130 Seeding Mixture No. 30	7.300 LB	_____.	_____.
0064	630.0500 Seed Water	14.000 MGAL	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20200714012 Project(s): 8010-00-70

Federal ID(s): WISC 2020286

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0066	634.0616 Posts Wood 4x6-Inch X 16-FT	2.000 EACH	_____.	_____.
0068	637.2210 Signs Type II Reflective H	10.000 SF	_____.	_____.
0070	642.5001 Field Office Type B	1.000 EACH	_____.	_____.
0072	643.0300 Traffic Control Drums	13,672.000 DAY	_____.	_____.
0074	643.0420 Traffic Control Barricades Type III	955.000 DAY	_____.	_____.
0076	643.0705 Traffic Control Warning Lights Type A	1,188.000 DAY	_____.	_____.
0078	643.0715 Traffic Control Warning Lights Type C	3,121.000 DAY	_____.	_____.
0080	643.0900 Traffic Control Signs	4,515.000 DAY	_____.	_____.
0082	643.0920 Traffic Control Covering Signs Type II	2.000 EACH	_____.	_____.
0084	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0086	646.1020 Marking Line Epoxy 4-Inch	13,338.000 LF	_____.	_____.
0088	646.5020 Marking Arrow Epoxy	24.000 EACH	_____.	_____.
0090	646.5320 Marking Railroad Crossings Epoxy	1.000 EACH	_____.	_____.
0092	646.6120 Marking Stop Line Epoxy 18-Inch	234.000 LF	_____.	_____.
0094	646.7120 Marking Diagonal Epoxy 12-Inch	72.000 LF	_____.	_____.
0096	646.8220 Marking Island Nose Epoxy	1.000 EACH	_____.	_____.
0098	646.9000 Marking Removal Line 4-Inch	8,370.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20200714012 Project(s): 8010-00-70

Federal ID(s): WISC 2020286

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0100	646.9300 Marking Removal Special Marking	23.000 EACH	_____.	_____.
0102	649.0105 Temporary Marking Line Paint 4-Inch	4,740.000 LF	_____.	_____.
0104	649.0150 Temporary Marking Line Removable Tape 4-Inch	9,860.000 LF	_____.	_____.
0106	650.5500 Construction Staking Curb Gutter and Curb & Gutter	346.000 LF	_____.	_____.
0108	650.8000 Construction Staking Resurfacing Reference	2,889.000 LF	_____.	_____.
0110	650.9000 Construction Staking Curb Ramps	10.000 EACH	_____.	_____.
0112	650.9910 Construction Staking Supplemental Control (project) 01. 8010-00-70	LS	LUMP SUM	_____.
0114	690.0150 Sawing Asphalt	570.000 LF	_____.	_____.
0116	740.0440 Incentive IRI Ride	3,922.000 DOL	1.00000	3,922.00
0118	SPV.0090 Special 01. Cure and Seal Treatment Concrete Curb and Gutter	346.000 LF	_____.	_____.
0120	SPV.0165 Special 01. Cure and Seal Treatment Concrete Sidewalk	1,503.000 SF	_____.	_____.
0122	305.0500 Shaping Shoulders	9.000 STA	_____.	_____.
<b>Section: 0001</b>			<b>Total:</b>	_____.
			<b>Total Bid:</b>	_____.