



Wisconsin Department of Transportation

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

September 9, 2020

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #15: 9140-12-70, WISC 2020 423
Antigo - Langlade
Spring Brook Bridge B-34-0052
STH 52
Langlade County

9140-12-73, WISC 2020 424
Antigo - Langlade
USH 45 to Clover Road
STH 64
Langlade County

Letting of September 15, 2020

This is Addendum No. 01, which provides for the following:

Schedule of Items:

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
460.6223	HMA Pavement 3 MT 58-28 S	TON	0	845	845

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
460.5223	HMA Pavement 3 LT 58-28 S	TON	845	0	0

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
5	Typical Sections (HMA pavement note updated)
19	Miscellaneous Quantities (HMA pavement quantity updated)

Schedule of Items

Attached, dated September 9, 2020, are the revised Schedule of Items Pages 1 – 8.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 5 and 19.


The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman


Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

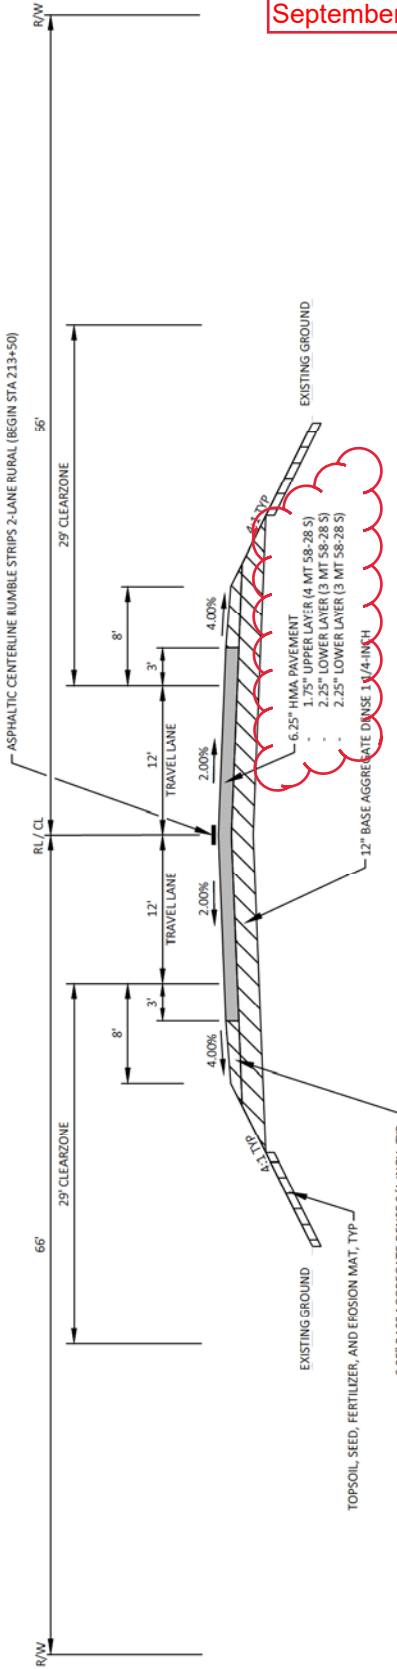

TYPICAL FINISHED SECTION
 ROADWAY BRIDGE APPROACHES
 STA 207+50 TO STA 208+00
 STA 213+00 TO STA 215+50

Addendum No. 01
 ID 9140-12-70
 Revised Sheet 5
 September 9, 2020

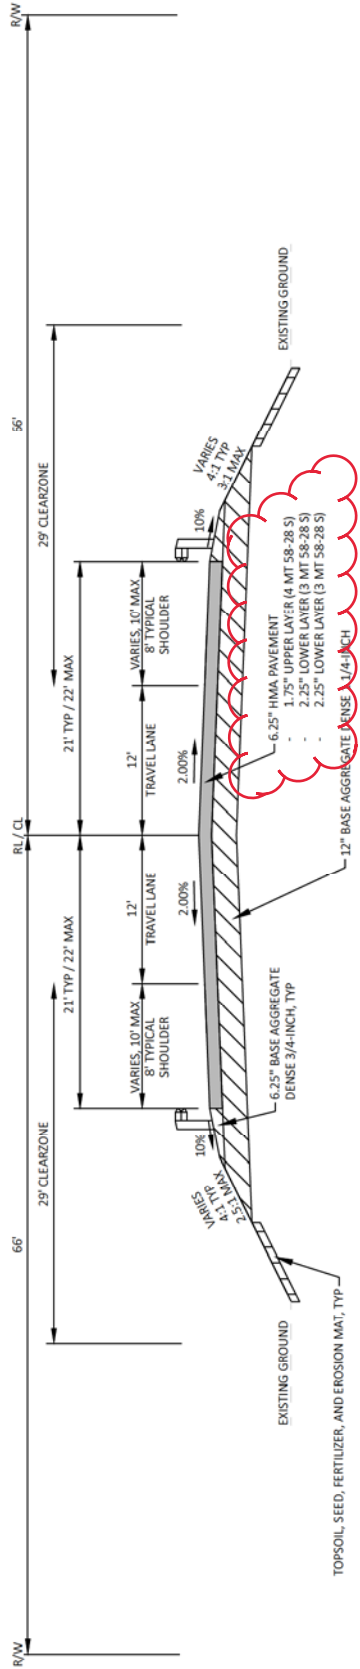

TYPICAL FINISHED SECTION
 ROADWAY BRIDGE APPROACHES
 STA 208+00 TO STA 210+30.33
 STA 210+77.87 TO STA 213+00

• UTILIZE PLAN AND PROFILE SHEET FOR FURTHER GUIDANCE ON SHOULDER WIDTHS

Addendum No. 01
 ID 9140-12-70
 Revised Sheet 19
 September 9, 2020

MAINTENANCE AND REPAIR OF HAUL ROADS

STATION - STATION	LOCATION	618.0100 MAINTENANCE AND REPAIR OF HAUL ROADS EACH
CATEGORY CODE 0010		
207+50 - 215+50	PROJECT 9140-12-70	1
TOTALS		1

ASPHALTIC ITEMS

STATION - STATION	LOCATION	455.0605 TACK COAT GAL	460.6223 HMA PAVEMENT 3 MT 58-28 S TON	460.6224 HMA PAVEMENT 4 MT 58-28 S TON	485.0120 ASPHALTIC SURFACE DRIVEWAYS AND FIELD ENTRANCES TON	465.0475 ASPHALTIC CENTERLINE RUMBLE STRIPS 2-LANE RURAL	COMMENTS
CATEGORY CODE 0010							
207+60 - 210+10	CL	200	390	145	--	--	WEST OF BRIDGE
210+66 - 215+50	CL	235	455	180	--	--	EAST OF BRIDGE
213+50 - 215+50	CL	--	--	--	200	200	
TOTALS		435	845	325	20	200	

BEAMGUARD ITEMS

STATION - STATION	LOCATION	614.2300 MGS GUARDRAIL 3 LF	614.2350 MGS GUARDRAIL SHORT RADIUS LF	614.2500 MGS THRE BEAM TRANSITION LF	614.2610 MGS GUARDRAIL TERMINAL EAST EACH	614.2630 MGS GUARDRAIL SHORT RADIUS TERMINAL EACH	COMMENTS
CATEGORY CODE 0010							
11+17 - 210+29	LT	66	101	39	--	1	WEST OF BRIDGE
208+77 - 209+92	RT	25	--	39	1	--	WEST OF BRIDGE
210+78 - 211+59	RT	25	--	39	1	--	EAST OF BRIDGE
211+11 - 212+26	LT	41	29	39	--	1	EAST OF BRIDGE
TOTAL		157	130	156	2	2	

RIPRAP AND GEOTEXTILE FABRIC ITEMS

STATION	LOCATION	606.0300 RIPRAP MEDIUM CY	645.0120 GEOTEXTILE FABRIC TYPE HR SY
CATEGORY CODE 0010			
210+75 - 211+50	EAST	40	28
TOTALS		40	28

CONCRETE CURB AND GUTTER ITEMS

STATION - STATION	LOCATION	601.0588 4-INCH SLOPED CONSTRUCTION STAKING TYPE TBT LF	650.5500 CURB, GUTTER AND GUTTER LF
CATEGORY CODE 0010			
211+05 - 211+55	LT	40	40
210+70 - 211+30	RT	40	40
TOTALS		80	80

WATER

STATION - STATION	LOCATION	624.0100 MGAL
CATEGORY CODE 0010		
207+50 - 215+50	LT & RT	39
TOTAL		39

CONCRETE BARRIER ITEMS

STATION - STATION	LOCATION	603.8000 TEMPORARY PRECAST DELIVERED LF	603.8125 TEMPORARY PRECAST INSTALLED LF	603.8505 ANCHORING CONCRETE BARRIER ON BRIDGE DECKS LF
CATEGORY CODE 0010				
207+50 - 215+50	PROJECT	800	1,600	60
TOTALS		800	1,600	60

PROJECT NO: 9140-12-70

HWY: STH 52

COUNTY: LANGLADE

MISCELLANECUS QUANTITIES

PLOT BY: gdsK

PLOT NAME: 11

SHEET: 19

MISC. SHEET 2



Proposal Schedule of Items

Proposal ID: 20200915015 Project(s): 9140-12-70, 9140-12-73

Federal ID(s): WISC 2020423, WISC 2020425

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	201.0105 Clearing	2.000 STA	_____.	_____.
0004	201.0205 Grubbing	2.000 STA	_____.	_____.
0006	203.0600.S Removing Old Structure Over Waterway With Minimal Debris (station) 01. 210+54	LS	LUMP SUM	_____.
0008	204.0115 Removing Asphaltic Surface Butt Joints	400.000 SY	_____.	_____.
0010	204.0120 Removing Asphaltic Surface Milling	85,280.000 SY	_____.	_____.
0012	204.0150 Removing Curb & Gutter	360.000 LF	_____.	_____.
0014	204.0155 Removing Concrete Sidewalk	14.000 SY	_____.	_____.
0016	204.0165 Removing Guardrail	480.000 LF	_____.	_____.
0018	204.0185 Removing Masonry	30.000 CY	_____.	_____.
0020	205.0100 Excavation Common	2,946.000 CY	_____.	_____.
0022	205.0400 Excavation Marsh	70.000 CY	_____.	_____.
0024	206.1000 Excavation for Structures Bridges (structure) 01. B-34-0052	LS	LUMP SUM	_____.
0026	208.1100 Select Borrow	250.000 CY	_____.	_____.
0028	210.1500 Backfill Structure Type A	354.000 TON	_____.	_____.
0030	211.0100 Prepare Foundation for Asphaltic Paving (project) 01. 9140-12-73	LS	LUMP SUM	_____.
0032	213.0100 Finishing Roadway (project) 01. 9140- 12-70	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20200915015 Project(s): 9140-12-70, 9140-12-73

Federal ID(s): WISC 2020423, WISC 2020425

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0034	213.0100 Finishing Roadway (project) 02. 9140-12-73	1.000 EACH	_____.	_____.
0036	305.0110 Base Aggregate Dense 3/4-Inch	1,360.000 TON	_____.	_____.
0038	305.0120 Base Aggregate Dense 1 1/4-Inch	3,485.000 TON	_____.	_____.
0040	415.0070 Concrete Pavement 7-Inch	100.000 SY	_____.	_____.
0042	415.0410 Concrete Pavement Approach Slab	140.000 SY	_____.	_____.
0044	416.1010 Concrete Surface Drains	5.000 CY	_____.	_____.
0046	450.4000 HMA Cold Weather Paving	1,000.000 TON	_____.	_____.
0048	455.0605 Tack Coat	6,900.000 GAL	_____.	_____.
0050	460.2000 Incentive Density HMA Pavement	7,740.000 DOL	1.00000	7,740.00
0054	460.6224 HMA Pavement 4 MT 58-28 S	11,245.000 TON	_____.	_____.
0056	465.0110 Asphaltic Surface Patching	200.000 TON	_____.	_____.
0058	465.0120 Asphaltic Surface Driveways and Field Entrances	20.000 TON	_____.	_____.
0060	465.0425 Asphaltic Shoulder Rumble Strips 2-Lane Rural	26,400.000 LF	_____.	_____.
0062	465.0475 Asphalt Centerline Rumble Strips 2-Lane Rural	16,525.000 LF	_____.	_____.
0064	502.0100 Concrete Masonry Bridges	278.000 CY	_____.	_____.
0066	502.3200 Protective Surface Treatment	210.000 SY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20200915015 Project(s): 9140-12-70, 9140-12-73

Federal ID(s): WISC 2020423, WISC 2020425

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0068	502.3210 Pigmented Surface Sealer	88.000 SY	_____.	_____.
0070	505.0400 Bar Steel Reinforcement HS Structures	5,920.000 LB	_____.	_____.
0072	505.0600 Bar Steel Reinforcement HS Coated Structures	44,380.000 LB	_____.	_____.
0074	505.0904 Bar Couplers No. 4	4.000 EACH	_____.	_____.
0076	505.0905 Bar Couplers No. 5	4.000 EACH	_____.	_____.
0078	505.0906 Bar Couplers No. 6	150.000 EACH	_____.	_____.
0080	511.1200 Temporary Shoring (structure) 01. B-34-0052	500.000 SF	_____.	_____.
0082	516.0500 Rubberized Membrane Waterproofing	26.000 SY	_____.	_____.
0084	550.2126 Piling CIP Concrete 12 3/4 X 0.375-Inch	1,200.000 LF	_____.	_____.
0086	601.0407 Concrete Curb & Gutter 18-Inch Type D	109.000 LF	_____.	_____.
0088	601.0411 Concrete Curb & Gutter 30-Inch Type D	100.000 LF	_____.	_____.
0090	601.0557 Concrete Curb & Gutter 6-Inch Sloped 36-Inch Type D	100.000 LF	_____.	_____.
0092	601.0588 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type TBT	80.000 LF	_____.	_____.
0094	603.8000 Concrete Barrier Temporary Precast Delivered	800.000 LF	_____.	_____.
0096	603.8125 Concrete Barrier Temporary Precast Installed	1,600.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20200915015 Project(s): 9140-12-70, 9140-12-73

Federal ID(s): WISC 2020423, WISC 2020425

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0098	603.8505 Anchoring Concrete Barrier Temporary Precast on Bridge Decks	60.000 LF	_____.	_____.
0100	606.0200 Riprap Medium	40.000 CY	_____.	_____.
0102	606.0300 Riprap Heavy	284.000 CY	_____.	_____.
0104	612.0406 Pipe Underdrain Wrapped 6-Inch	170.000 LF	_____.	_____.
0106	614.0150 Anchor Assemblies for Steel Plate Beam Guard	4.000 EACH	_____.	_____.
0108	614.2300 MGS Guardrail 3	157.000 LF	_____.	_____.
0110	614.2350 MGS Guardrail Short Radius	130.000 LF	_____.	_____.
0112	614.2500 MGS Thrie Beam Transition	156.000 LF	_____.	_____.
0114	614.2610 MGS Guardrail Terminal EAT	2.000 EACH	_____.	_____.
0116	614.2630 MGS Guardrail Short Radius Terminal	2.000 EACH	_____.	_____.
0118	618.0100 Maintenance And Repair of Haul Roads (project) 01. 9140-12-70	1.000 EACH	_____.	_____.
0120	618.0100 Maintenance And Repair of Haul Roads (project) 02. 9140-12-73	1.000 EACH	_____.	_____.
0122	619.1000 Mobilization	1.000 EACH	_____.	_____.
0124	624.0100 Water	53.000 MGAL	_____.	_____.
0126	625.0100 Topsoil	3,740.000 SY	_____.	_____.
0128	628.1504 Silt Fence	1,675.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20200915015 Project(s): 9140-12-70, 9140-12-73

Federal ID(s): WISC 2020423, WISC 2020425

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0130	628.1520 Silt Fence Maintenance	845.000 LF	_____.	_____.
0132	628.1905 Mobilizations Erosion Control	7.000 EACH	_____.	_____.
0134	628.1910 Mobilizations Emergency Erosion Control	5.000 EACH	_____.	_____.
0136	628.2006 Erosion Mat Urban Class I Type A	100.000 SY	_____.	_____.
0138	628.2008 Erosion Mat Urban Class I Type B	3,640.000 SY	_____.	_____.
0140	628.6005 Turbidity Barriers	325.000 SY	_____.	_____.
0142	628.7015 Inlet Protection Type C	9.000 EACH	_____.	_____.
0144	628.7504 Temporary Ditch Checks	36.000 LF	_____.	_____.
0146	628.7555 Culvert Pipe Checks	12.000 EACH	_____.	_____.
0148	628.7570 Rock Bags	60.000 EACH	_____.	_____.
0150	629.0210 Fertilizer Type B	3.670 CWT	_____.	_____.
0152	630.0140 Seeding Mixture No. 40	3.000 LB	_____.	_____.
0154	630.0160 Seeding Mixture No. 60	40.000 LB	_____.	_____.
0156	630.0500 Seed Water	165.000 MGAL	_____.	_____.
0158	633.5200 Markers Culvert End	4.000 EACH	_____.	_____.
0160	642.5001 Field Office Type B	1.000 EACH	_____.	_____.
0162	643.0300 Traffic Control Drums	3,122.000 DAY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20200915015 Project(s): 9140-12-70, 9140-12-73

Federal ID(s): WISC 2020423, WISC 2020425

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0164	643.0420 Traffic Control Barricades Type III	483.000 DAY	_____.	_____.
0166	643.0705 Traffic Control Warning Lights Type A	464.000 DAY	_____.	_____.
0168	643.0715 Traffic Control Warning Lights Type C	1,264.000 DAY	_____.	_____.
0170	643.0900 Traffic Control Signs	3,463.000 DAY	_____.	_____.
0172	643.0920 Traffic Control Covering Signs Type II	13.000 EACH	_____.	_____.
0174	643.1050 Traffic Control Signs PCMS	14.000 DAY	_____.	_____.
0176	643.1070 Traffic Control Cones 42-Inch	2,218.000 DAY	_____.	_____.
0178	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0180	645.0111 Geotextile Type DF Schedule A	80.000 SY	_____.	_____.
0182	645.0120 Geotextile Type HR	498.000 SY	_____.	_____.
0184	646.1020 Marking Line Epoxy 4-Inch	8,791.000 LF	_____.	_____.
0186	646.1040 Marking Line Grooved Wet Ref Epoxy 4-Inch	39,764.000 LF	_____.	_____.
0188	646.3020 Marking Line Epoxy 8-Inch	1,151.000 LF	_____.	_____.
0190	646.5020 Marking Arrow Epoxy	14.000 EACH	_____.	_____.
0192	646.5120 Marking Word Epoxy	2.000 EACH	_____.	_____.
0194	646.6120 Marking Stop Line Epoxy 18-Inch	146.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20200915015 Project(s): 9140-12-70, 9140-12-73

Federal ID(s): WISC 2020423, WISC 2020425

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0196	646.6464 Cold Weather Marking Epoxy 4-Inch	5,000.000 LF	_____.	_____.
0198	646.7120 Marking Diagonal Epoxy 12-Inch	26.000 LF	_____.	_____.
0200	646.8120 Marking Curb Epoxy	70.000 LF	_____.	_____.
0202	646.8220 Marking Island Nose Epoxy	7.000 EACH	_____.	_____.
0204	646.9000 Marking Removal Line 4-Inch	700.000 LF	_____.	_____.
0206	648.0100 Locating No-Passing Zones	3.750 MI	_____.	_____.
0208	649.0105 Temporary Marking Line Paint 4-Inch	2,800.000 LF	_____.	_____.
0210	649.0120 Temporary Marking Line Epoxy 4-Inch	21,658.000 LF	_____.	_____.
0212	649.0150 Temporary Marking Line Removable Tape 4-Inch	1,400.000 LF	_____.	_____.
0214	649.0850 Temporary Marking Stop Line Removable Tape 18-Inch	57.000 LF	_____.	_____.
0216	650.4500 Construction Staking Subgrade	800.000 LF	_____.	_____.
0218	650.5000 Construction Staking Base	800.000 LF	_____.	_____.
0220	650.5500 Construction Staking Curb Gutter and Curb & Gutter	180.000 LF	_____.	_____.
0222	650.6500 Construction Staking Structure Layout (structure) 01. B-34-0052	LS	LUMP SUM	_____.
0224	650.8000 Construction Staking Resurfacing Reference	21,400.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20200915015 Project(s): 9140-12-70, 9140-12-73

Federal ID(s): WISC 2020423, WISC 2020425

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0226	650.9910 Construction Staking Supplemental Control (project) 01. 9140-12-70	LS	LUMP SUM	_____.
0228	650.9910 Construction Staking Supplemental Control (project) 02. 9140-12-73	LS	LUMP SUM	_____.
0230	650.9920 Construction Staking Slope Stakes	800.000 LF	_____.	_____.
0232	661.0100 Temporary Traffic Signals for Bridges (structure) 01. B-34-0052	LS	LUMP SUM	_____.
0234	690.0150 Sawing Asphalt	120.000 LF	_____.	_____.
0236	690.0250 Sawing Concrete	8.000 LF	_____.	_____.
0238	715.0415 Incentive Strength Concrete Pavement	1,000.000 DOL	1.00000	1,000.00
0240	715.0502 Incentive Strength Concrete Structures	1,500.000 DOL	1.00000	1,500.00
0242	740.0440 Incentive IRI Ride	7,982.000 DOL	1.00000	7,982.00
0244	SPV.0060 Special 01.Temporary Water Passage	5.000 EACH	_____.	_____.
0246	460.6223 HMA Pavement 3 MT 58-28 S	845.000 TON	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.