



Wisconsin Department of Transportation

March 3, 2021

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #06: 6040-00-73, WISC 2021 224
Portage - Fox Lake
STH 22 to 0.19 MI W of Morris Drive
STH 33
Columbia County

6993-03-70, WISC 2021 225
Pardeeville - Manchester
CTH P to STH 33
STH 44
Columbia County

Letting of March 9, 2021

This is Addendum No. 02, which provides for the following:

Schedule of Items:

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
325.0100	Pulverize and Relay	SY	0	7,040	7,040

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
330.0100	Mill and Relay	SY	7,040	-7,040	0

Plan Sheets:

Revised Plan Sheets – 6040-00-73	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
8	Construction Details (Revised the sideroad construction detail to replace the bid item Mill and Relay with bid item Pulverize and Relay)
36	Miscellaneous Quantities (revised quantities associated with changing Mill and Relay to Pulverize and Relay)

Schedule of Items

Attached, dated March 3, 2021, are the revised Schedule of Items Pages 1 – 7.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:
Revised: 8 and 36 for Project 6040-00-73.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

Addendum No. 02
 ID 6040-00-73
 Revised Sheet 8
 March 3, 2021


2

2


* REMOVE ANY REMAINING MATERIAL ADJACENT TO VERTICAL EDGE (SAW CUT AND REMOVING MATERIAL INCLUDED IN BID ITEM PULVERIZE AND RELAY)

* REMOVE AND SHAPE EXCESS PULVERIZED MATERIAL (INCLUDED IN PULVERIZE AND RELAY BID ITEM)


SHAPE PULVERIZED AND RELAYED MATERIAL IN ORDER TO ACHIEVE PROPOSED SURFACE ELEVATIONS. MAINTAIN 4" OVERLAY DEPTH (INCLUDED IN PULVERIZE & RELAY BID ITEM)

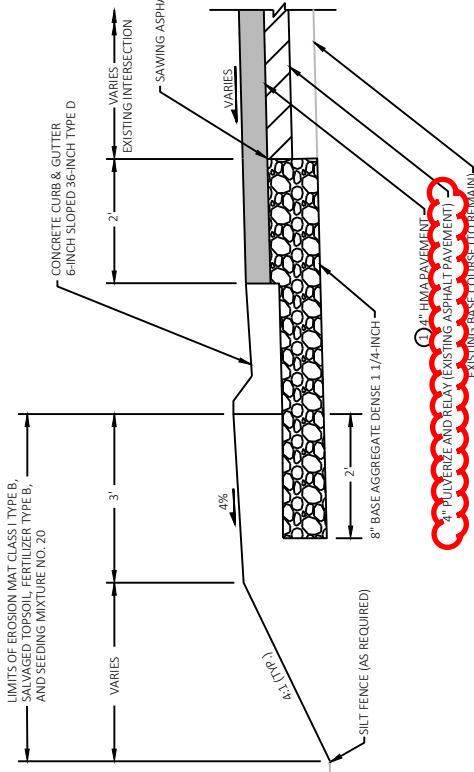


SECTION C-C

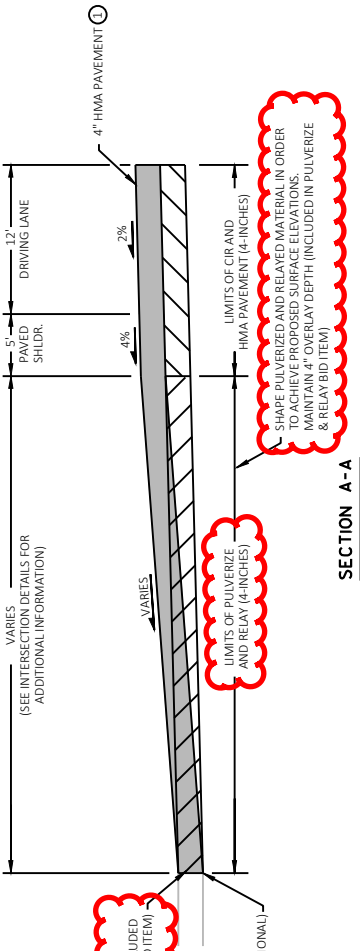

SECTION A-A

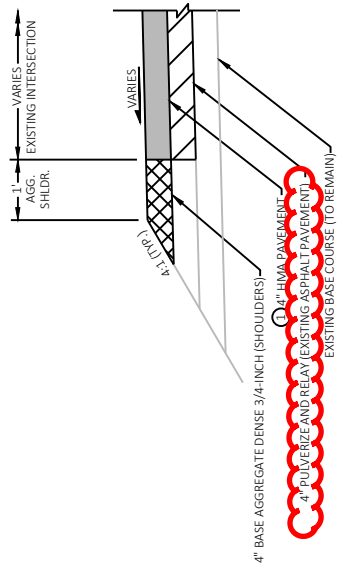

SECTION B-B

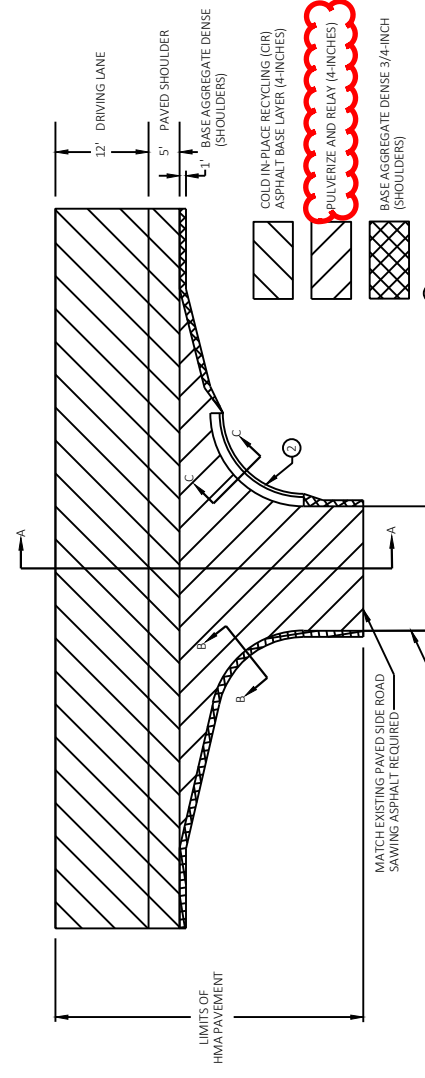

PLAN VIEW

- ① SEE HMA PAVEMENT SUMMARY TABLE FOR HMA TYPE AND LAYER THICKNESSES
- ② CONCRETE CURB & GUTTER 6-INCH SLOPED 36-INCH TYPED

SIDEROAD PAVING DETAIL

PREPARE FOUNDATION FOR ASPHALTIC SHOULDERS

CATEGORY	STATION - STATION	LOCATION	STA
0010	34+44 - 133+00	RT/LT	197
	133+00 - 243+16	RT/LT	198
	243+16 - 350+00	RT/LT	214
	350+00 - 429+30	RT/LT	159
	429+30 - 532+61	RT/LT	207
TOTAL			975

CATEGORY	STATION - STATION	LOCATION	TON
0010	34+44 - 133+00	RT/LT	2,450
	133+00 - 243+16	RT/LT	2,550
	243+16 - 350+00	RT/LT	2,600
	350+00 - 429+30	RT/LT	1,950
	429+30 - 532+61	RT/LT	2,400
UNDISTRIBUTED			2,988
TOTALS			14,938

CATEGORY	PROJECT	EACH
0010	01. 6040-00-73	1

FINISHING ROADWAY

CATEGORY	STATION - STATION	LOCATION	TON
0010	34+44 - 133+00	RT/LT	2,450
	133+00 - 243+16	RT/LT	2,550
	243+16 - 350+00	RT/LT	2,600
	350+00 - 429+30	RT/LT	1,950
	429+30 - 532+61	RT/LT	2,400
UNDISTRIBUTED			2,988
TOTALS			14,938

CATEGORY	PROJECT	EACH
0010	01. 6040-00-73	1

BASE AGGREGATE DENSE

CATEGORY	STATION - STATION	LOCATION	TON
0010	34+44 - 133+00	RT/LT	2,450
	133+00 - 243+16	RT/LT	2,550
	243+16 - 350+00	RT/LT	2,600
	350+00 - 429+30	RT/LT	1,950
	429+30 - 532+61	RT/LT	2,400
UNDISTRIBUTED			2,988
TOTALS			14,938

CATEGORY	PROJECT	EACH
0010	01. 6040-00-73	1

PREPARE FOUNDATION FOR CIR BASE LAYER

CATEGORY	PROJECT	EACH
0010	01. 6040-00-73	1

PREPARE FOUNDATION FOR CIR BASE LAYER

CATEGORY	PROJECT	EACH
0010	01. 6040-00-73	1

PULVERIZE AND RELAY

CATEGORY	STATION - STATION	LOCATION	SY
0010	34+44 - 133+00	RT/LT	1,000
	133+00 - 243+16	RT/LT	1,500
	243+16 - 350+00	RT/LT	1,600
	350+00 - 429+30	RT/LT	840
	429+30 - 532+61	RT/LT	2,100
TOTAL			7,040

ASPHALTIC FLUMES

CATEGORY	STATION - STATION	LOCATION	SY
0010	133+00 - 243+16	RT/LT	57
	243+16 - 350+00	RT/LT	106
	350+00 - 429+30	RT/LT	50
	429+30 - 532+61	RT/LT	100
TOTAL			313

ASPHALTIC SURFACE

CATEGORY	STATION - STATION	LOCATION	TON	REMARKS
0010	36+25 - 46+81	LT	33	INTERSECTION RUMBLE STRIP REMOVAL

Addendum No. 02
 ID 6040-00-73
 Revised Sheet 36
 March 3, 2021



Proposal Schedule of Items

Proposal ID: 20210309006 Project(s): 6040-00-73, 6993-03-70

Federal ID(s): WISC 2021224, WISC 2021225

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	203.0100 Removing Small Pipe Culverts	4.000 EACH	_____.	_____.
0004	204.0100 Removing Concrete Pavement	120.000 SY	_____.	_____.
0006	204.0110 Removing Asphaltic Surface	1,240.000 SY	_____.	_____.
0008	204.0115 Removing Asphaltic Surface Butt Joints	1,620.000 SY	_____.	_____.
0010	204.0120 Removing Asphaltic Surface Milling	46,830.000 SY	_____.	_____.
0012	204.0150 Removing Curb & Gutter	2,760.000 LF	_____.	_____.
0014	204.0165 Removing Guardrail	399.000 LF	_____.	_____.
0016	205.0100 Excavation Common	1,000.000 CY	_____.	_____.
0018	208.0100 Borrow	47.000 CY	_____.	_____.
0020	211.0400 Prepare Foundation for Asphaltic Shoulders	1,231.000 STA	_____.	_____.
0022	211.0700.S Prepare Foundation for CIR Base Layer (project) 01. 6040-00-73	1.000 EACH	_____.	_____.
0024	211.0800.S Base Repair for CIR Layer	1,257.000 CY	_____.	_____.
0026	213.0100 Finishing Roadway (project) 01. 6040-00-73	1.000 EACH	_____.	_____.
0028	213.0100 Finishing Roadway (project) 02. 6993-03-70	1.000 EACH	_____.	_____.
0030	305.0110 Base Aggregate Dense 3/4-Inch	18,338.000 TON	_____.	_____.
0032	305.0120 Base Aggregate Dense 1 1/4-Inch	1,012.000 TON	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20210309006 Project(s): 6040-00-73, 6993-03-70

Federal ID(s): WISC 2021224, WISC 2021225

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0034	327.1000.S CIR Asphaltic Base Layer	189,700.000 SY	_____.	_____.
0038	455.0605 Tack Coat	38,970.000 GAL	_____.	_____.
0040	455.0770.S Asphalt Stabilizing Agent	840.000 TON	_____.	_____.
0042	460.0105.S HMA Percent Within Limits (PWL) Test Strip Volumetrics	2.000 EACH	_____.	_____.
0044	460.0110.S HMA Percent Within Limits (PWL) Test Strip Density	2.000 EACH	_____.	_____.
0046	460.2000 Incentive Density HMA Pavement	6,720.000 DOL	1.00000	6,720.00
0048	460.2005 Incentive Density PWL HMA Pavement	31,140.000 DOL	1.00000	31,140.00
0050	460.2007 Incentive Density HMA Pavement Longitudinal Joints	88,045.000 DOL	1.00000	88,045.00
0052	460.2010 Incentive Air Voids HMA Pavement	45,170.000 DOL	1.00000	45,170.00
0054	460.5223 HMA Pavement 3 LT 58-28 S	5,900.000 TON	_____.	_____.
0056	460.5224 HMA Pavement 4 LT 58-28 S	4,590.000 TON	_____.	_____.
0058	460.6223 HMA Pavement 3 MT 58-28 S	25,610.000 TON	_____.	_____.
0060	460.6224 HMA Pavement 4 MT 58-28 S	19,760.000 TON	_____.	_____.
0062	465.0105 Asphaltic Surface	33.000 TON	_____.	_____.
0064	465.0120 Asphaltic Surface Driveways and Field Entrances	393.000 TON	_____.	_____.
0066	465.0315 Asphaltic Flumes	313.000 SY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20210309006 Project(s): 6040-00-73, 6993-03-70

Federal ID(s): WISC 2021224, WISC 2021225

SECTION: 0001

Roadway Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0068	465.0450 Asphaltic Intersection Rumble Strips	79.000 SY	_____.	_____.
0070	509.1500 Concrete Surface Repair	25.000 SF	_____.	_____.
0072	520.1024 Apron Endwalls for Culvert Pipe 24-Inch	4.000 EACH	_____.	_____.
0074	520.1036 Apron Endwalls for Culvert Pipe 36-Inch	4.000 EACH	_____.	_____.
0076	520.3324 Culvert Pipe Class III-A 24-Inch	90.000 LF	_____.	_____.
0078	520.3336 Culvert Pipe Class III-A 36-Inch	98.000 LF	_____.	_____.
0080	601.0557 Concrete Curb & Gutter 6-Inch Sloped 36-Inch Type D	2,692.000 LF	_____.	_____.
0082	606.0200 Riprap Medium	18.000 CY	_____.	_____.
0084	614.2300 MGS Guardrail 3	350.000 LF	_____.	_____.
0086	614.2500 MGS Thrie Beam Transition	150.000 LF	_____.	_____.
0088	614.2610 MGS Guardrail Terminal EAT	4.000 EACH	_____.	_____.
0090	618.0100 Maintenance And Repair of Haul Roads (project) 01. 6040-00-73	1.000 EACH	_____.	_____.
0092	618.0100 Maintenance And Repair of Haul Roads (project) 02. 6993-03-70	1.000 EACH	_____.	_____.
0094	619.1000 Mobilization	1.000 EACH	_____.	_____.
0096	624.0100 Water	275.000 MGAL	_____.	_____.
0098	625.0500 Salvaged Topsoil	4,038.000 SY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20210309006 Project(s): 6040-00-73, 6993-03-70

Federal ID(s): WISC 2021224, WISC 2021225

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0100	627.0200 Mulching	141.000 SY	_____	_____
0102	628.1504 Silt Fence	1,420.000 LF	_____	_____
0104	628.1520 Silt Fence Maintenance	3,100.000 LF	_____	_____
0106	628.1905 Mobilizations Erosion Control	21.000 EACH	_____	_____
0108	628.1910 Mobilizations Emergency Erosion Control	4.000 EACH	_____	_____
0110	628.2004 Erosion Mat Class I Type B	4,038.000 SY	_____	_____
0112	628.7504 Temporary Ditch Checks	45.000 LF	_____	_____
0114	628.7555 Culvert Pipe Checks	12.000 EACH	_____	_____
0116	628.7560 Tracking Pads	1.000 EACH	_____	_____
0118	628.7570 Rock Bags	110.000 EACH	_____	_____
0120	629.0210 Fertilizer Type B	2.800 CWT	_____	_____
0122	630.0110 Seeding Mixture No. 10	7.000 LB	_____	_____
0124	630.0120 Seeding Mixture No. 20	98.000 LB	_____	_____
0126	630.0300 Seeding Borrow Pit	3.800 LB	_____	_____
0128	630.0500 Seed Water	74.000 MGAL	_____	_____
0130	633.5200 Markers Culvert End	8.000 EACH	_____	_____
0132	634.0616 Posts Wood 4x6-Inch X 16-FT	2.000 EACH	_____	_____



Proposal Schedule of Items

Proposal ID: 20210309006 Project(s): 6040-00-73, 6993-03-70

Federal ID(s): WISC 2021224, WISC 2021225

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0134	638.2102 Moving Signs Type II	22.000 EACH	_____.	_____.
0136	642.5401 Field Office Type D	1.000 EACH	_____.	_____.
0138	643.0300 Traffic Control Drums	1,208.000 DAY	_____.	_____.
0140	643.0420 Traffic Control Barricades Type III	8,285.000 DAY	_____.	_____.
0142	643.0705 Traffic Control Warning Lights Type A	9,042.000 DAY	_____.	_____.
0144	643.0900 Traffic Control Signs	47,743.000 DAY	_____.	_____.
0146	643.0920 Traffic Control Covering Signs Type II	39.000 EACH	_____.	_____.
0148	643.1050 Traffic Control Signs PCMS	42.000 DAY	_____.	_____.
0150	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0152	645.0120 Geotextile Type HR	74.000 SY	_____.	_____.
0154	646.1020 Marking Line Epoxy 4-Inch	65,582.000 LF	_____.	_____.
0156	646.1040 Marking Line Grooved Wet Ref Epoxy 4-Inch	123,882.000 LF	_____.	_____.
0158	646.3040 Marking Line Grooved Wet Ref Epoxy 8-Inch	590.000 LF	_____.	_____.
0160	646.6120 Marking Stop Line Epoxy 18-Inch	388.000 LF	_____.	_____.
0162	648.0100 Locating No-Passing Zones	11.940 MI	_____.	_____.
0164	650.5500 Construction Staking Curb Gutter and Curb & Gutter	2,692.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20210309006 Project(s): 6040-00-73, 6993-03-70

Federal ID(s): WISC 2021224, WISC 2021225

SECTION: 0001

Roadway Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0166	650.6000 Construction Staking Pipe Culverts	4.000 EACH	_____.	_____.
0168	650.8000 Construction Staking Resurfacing Reference	63,020.000 LF	_____.	_____.
0170	650.9910 Construction Staking Supplemental Control (project) 01. 6040-00-73	LS	LUMP SUM	_____.
0172	650.9910 Construction Staking Supplemental Control (project) 02. 6993-03-70	LS	LUMP SUM	_____.
0174	650.9920 Construction Staking Slope Stakes	610.000 LF	_____.	_____.
0176	690.0150 Sawing Asphalt	4,682.000 LF	_____.	_____.
0178	690.0250 Sawing Concrete	169.000 LF	_____.	_____.
0180	740.0440 Incentive IRI Ride	49,348.000 DOL	1.00000	49,348.00
0182	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	625.000 HRS	5.00000	3,125.00
0184	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	500.000 HRS	5.00000	2,500.00
0186	SPV.0060 Special 01. Verify Landmark Reference Monuments	12.000 EACH	_____.	_____.
0188	SPV.0060 Special 02. Landmark Reference Monuments Special	11.000 EACH	_____.	_____.
0190	SPV.0090 Special 01. Asphaltic Centerline Rumble Strips, Sinusoidal, 2-Lane Rural	55,130.000 LF	_____.	_____.
0192	SPV.0090 Special 02. Flashing Stainless Steel	132.000 LF	_____.	_____.
0194	325.0100 Pulverize and Relay	7,040.000 SY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20210309006 Project(s): 6040-00-73, 6993-03-70

Federal ID(s): WISC 2021224, WISC 2021225

Section: 0001

Total: _____.

Total Bid: _____.

