



# Wisconsin Department of Transportation

## Division of Transportation Systems Development

Bureau of Project Development  
4822 Madison Yards Way, 4<sup>th</sup> Floor South  
Madison, WI 53705

June 7, 2021

Telephone: (608) 266-1631  
Facsimile (FAX): (608) 266-8459

### NOTICE TO ALL CONTRACTORS:

**Proposal #13: 1706-00-70, WISC 2021375**  
**Dubuque – Shullsburg**  
**.3 Mi E STH 35 to V Hazel Green**  
**STH 11**  
**Grant County**

### Letting of June 8, 2021

This is Addendum No. 02, which provides for the following:

#### Special Provisions:

Revised Special Provisions	
Article No.	Description
31	Bearing Repair, Item SPV.0060.04

#### Schedule of Items:

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
646.1020	Marking Line Epoxy 4-Inch	LF	0	58,815	58,815
649.0120	Temporary Marking Line Epoxy 4-Inch	LF	0	91,240	91,240

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
646.4520	Marking Line Same Day Epoxy 4-Inch	LF	58,815	-58,815	0

#### Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
21	Construction Detail (Pavement marking operation to final lift of asphalt)
70	Miscellaneous Quantities (Revisions of temporary and permanent marking items)

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

*Mike Coleman*

Proposal Development Specialist  
Proposal Management Section

**ADDENDUM NO. 02**

**1706-00-70**

**June 7, 2021**

**Special Provisions**

**31. Bearing Repair, Item SPV.0060.04.**

*Insert the following paragraph after the first paragraph of the section titled C Construction:*

Existing anchor bolts are to be cut off and ground flush. New anchor bolts, nuts and washers shall conform to ASTM F1554 Grade 50 and shall be galvanized in accordance with ASTM A153, Class C. New 1" dia anchor bolts should be centered on the short axis with a 1 7/8" edge distance to the plate edge. Embed anchor bolts 12" in existing concrete. Two bolts required per bearing. Shim size should be same as bearing size (15"x12"). Shim height varies from zero to 1/2" and to be determined after cleaning the bearings. Shim material is ASTM A709 Grade 50W. Field weld tip of girder flange to top plate of the bearing with 1/4" fillet weld. Provide a 4 1/2" x 2 1/2" x 13/16" plate washer above bearing top plate at each anchor bolt, outside the girder flange. Provide a 2 1/2" x 1 1/4" notch on the plate washer on the side adjacent to the girder flange. Replace existing bearing pad with a new 1/8" thick bearing pad per 506.2.6 of the standard spec.


**Schedule of Items**

Attached, dated June 7, 2021, are the revised Schedule of Items Pages 7 – 9.

**Plan Sheets**


The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:  
Revised: 21 and 70.

END OF ADDENDUM

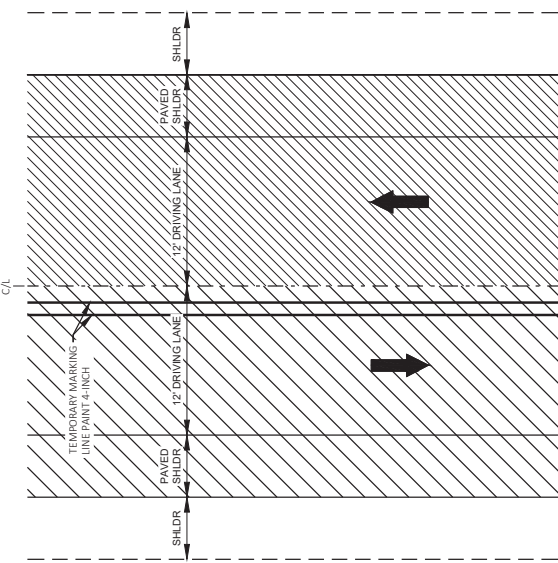

PLAN VIEW


- FIRST PASS 3" HMA  
PAVEMENT 3 MT 58-28 S
- SECOND PASS 3" HMA  
PAVEMENT 3 MT 58-28 S
- THIRD PASS 2" HMA  
PAVEMENT 4 MT 58-28 H

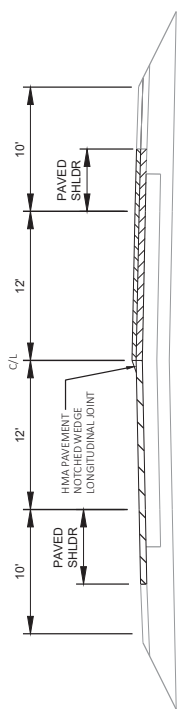

CROSS SECTION VIEW

THIRD PASS DETAIL

MARKING LINE 5/8\"/>

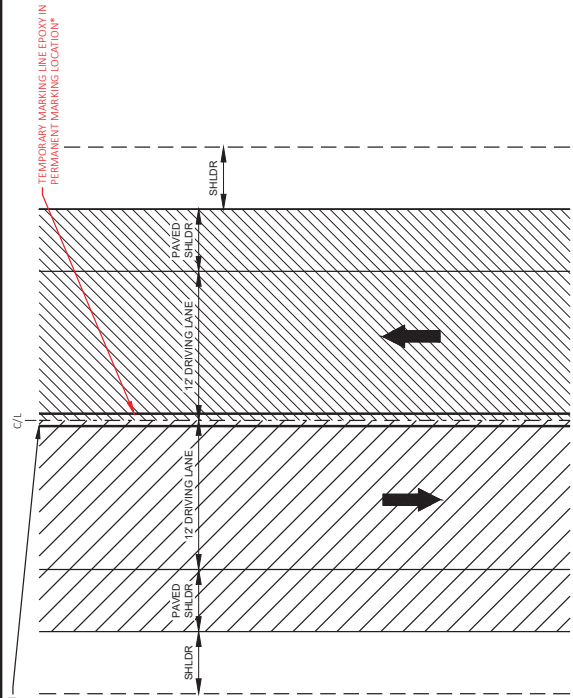


PLAN VIEW

- FIRST PASS 3" HMA  
PAVEMENT 3 MT 58-28 S
- SECOND PASS 3" HMA  
PAVEMENT 3 MT 58-28 S
- THIRD PASS 2" HMA  
PAVEMENT 4 MT 58-28 H
- FOURTH PASS 2" HMA  
PAVEMENT 4 MT 58-28 H

NOTE

\* TEMPORARY MARKING LINE EPOXY APPLIED SAME DAY AS FOURTH PASS

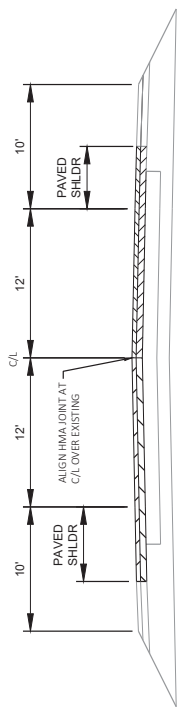

CROSS SECTION VIEW

FOURTH PASS DETAIL

Addendum No. 02  
ID 1706-00-70  
Revised Sheet 21  
June 7, 2021

Addendum No. 02  
ID 1706-00-70  
Revised Sheet 70  
June 7, 2021

TEMPORARY AND PERMANENT MARKING ITEMS

CATEGORY	STATION	TO	STATION	LOCATION	646.1040 MARKING LINE GROOVED WET REF EPOXY 4-INCH		646.3040 MARKING LINE GROOVED WET REF EPOXY 8-INCH		646.1020 MARKING LINE EPOXY 4-INCH		646.6120 MARKING STOP LINE EPOXY 18-INCH		646.6464 COLD WEATHER MARKING EPOXY 4-INCH		646.6468 COLD WEATHER MARKING EPOXY 8-INCH		649.0105 TEMPORARY MARKING LINE PAINT 4-INCH		649.0120 TEMPORARY MARKING LINE EPOXY 4-INCH		REMARKS		
					WHITE LF	WHITE RT	WHITE LF	WHITE RT	YELLOW LF	YELLOW RT	WHITE LF	WHITE RT	WHITE LF	WHITE RT	WHITE LF	WHITE RT	YELLOW LF	YELLOW RT	YELLOW LF	YELLOW RT			
0010	15+35	-	31+50	LT & RT																			
0010	31+50	-	36+50	LT & RT																			
0010	36+50	-	88+00	LT & RT																			
0010	69+08	-	70+73	LT & RT																			
0010	69+28	-	71+85	LT & RT																			
0010	88+00	-	99+00	LT & RT																			
0010	99+00	-	112+00	LT & RT																			
0010	112+00	-	135+50	LT & RT																			
0010	135+50	-	141+50	LT & RT																			
0010	141+50	-	157+50	LT & RT																			
0010	157+50	-	164+00	LT & RT																			
0010	164+00	-	173+50	LT & RT																			
0010	173+50	-	185+00	LT & RT																			
0010	185+00	-	198+00	LT & RT																			
0010	198+00	-	211+00	LT & RT																			
0010	211+00	-	224+50	LT & RT																			
0010	224+50	-	235+50	LT & RT																			
0010	235+50	-	247+50	LT & RT																			
0010	247+50	-	258+00	LT & RT																			
0010	258+00	-	260+00	LT & RT																			
0010	260+00	-	271+50	LT & RT																			
0010	271+50	-	275+50	LT & RT																			
0010	275+50	-	286+50	LT & RT																			
0010	286+50	-	298+00	LT & RT																			
0010	298+00	-	304+50	LT & RT																			
0010	304+50	-	315+50	LT & RT																			
0010	310+00	-	358+75	LT & RT																			
0010	315+50	-	331+00	LT & RT																			
0010	331+00	-	361+00	LT & RT																			
0010	361+00	-	381+00	LT & RT																			
0010	381+00	-	384+00	LT & RT																			
0010	381+00	-	419+00	LT & RT																			
0010	384+00	-	428+00	LT & RT																			
0010	428+00	-	433+00	LT & RT																			
0010	433+00	-	439+00	LT & RT																			
0010	439+00	-	464+00	LT & RT																			
0010	464+00	-	471+55	LT & RT																			
0010	15+35	-	471+55	LT & RT																			
			TOTAL S.0010																				

PROJECT NO: 1706-00-70

HWY: STH 11

COUNTY: GRANT

MISCELLANEOUS QUANTITIES

PLOT NAME :

PLOT DATE : Thursday, January 21, 2021

SHEET: 70

E



Proposal Schedule of Items

Proposal ID: 20210608013 Project(s): 1706-00-70

Federal ID(s): WISC 2021375

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0192	645.0120 Geotextile Type HR	1,048.000 SY	_____.	_____.
0194	645.0220 Geogrid Type SR	7,520.000 SY	_____.	_____.
0196	646.1040 Marking Line Grooved Wet Ref Epoxy 4-Inch	91,755.000 LF	_____.	_____.
0198	646.3040 Marking Line Grooved Wet Ref Epoxy 8-Inch	170.000 LF	_____.	_____.
0202	646.6120 Marking Stop Line Epoxy 18-Inch	375.000 LF	_____.	_____.
0204	646.6464 Cold Weather Marking Epoxy 4-Inch	150,570.000 LF	_____.	_____.
0206	646.6468 Cold Weather Marking Epoxy 8-Inch	170.000 LF	_____.	_____.
0208	648.0100 Locating No-Passing Zones	9.000 MI	_____.	_____.
0210	649.0105 Temporary Marking Line Paint 4-Inch	91,240.000 LF	_____.	_____.
0212	649.0805 Temporary Marking Stop Line Paint 18-Inch	240.000 LF	_____.	_____.
0214	650.4000 Construction Staking Storm Sewer	2.000 EACH	_____.	_____.
0216	650.5500 Construction Staking Curb Gutter and Curb & Gutter	96.000 LF	_____.	_____.
0218	650.6000 Construction Staking Pipe Culverts	5.000 EACH	_____.	_____.
0220	650.8000 Construction Staking Resurfacing Reference	45,375.000 LF	_____.	_____.
0222	650.9910 Construction Staking Supplemental Control (project) 01. 1706-00-70	LS	LUMP SUM	_____.



Proposal Schedule of Items

Proposal ID: 20210608013 Project(s): 1706-00-70

Federal ID(s): WISC 2021375

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0224	650.9920 Construction Staking Slope Stakes	4,300.000 LF	_____.	_____.
0226	690.0150 Sawing Asphalt	560.000 LF	_____.	_____.
0228	715.0415 Incentive Strength Concrete Pavement	500.000 DOL	1.00000	500.00
0230	740.0440 Incentive IRI Ride	34,180.000 DOL	1.00000	34,180.00
0232	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	300.000 HRS	5.00000	1,500.00
0234	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	1,200.000 HRS	5.00000	6,000.00
0236	SPV.0035 Special 01. Salvaged Asphaltic Millings	515.000 CY	_____.	_____.
0238	SPV.0060 Special 01. Verify Landmark Reference Monuments	4.000 EACH	_____.	_____.
0240	SPV.0060 Special 02. Landmark Reference Monuments Special	4.000 EACH	_____.	_____.
0242	SPV.0060 Special 03. Cleaning and Painting Bearings	16.000 EACH	_____.	_____.
0244	SPV.0060 Special 04. Bearing Repair	16.000 EACH	_____.	_____.
0246	SPV.0090 Special 01. Modified Concrete Curb and Gutter Type TBTT	96.000 LF	_____.	_____.
0248	SPV.0090 Special 02. Flashing Stainless Steel	161.000 LF	_____.	_____.
0250	SPV.0090 Special 03. Expansion Joint Seal	38.000 LF	_____.	_____.
0252	SPV.0105 Special 03. Box Culvert Joint Repair C-22-1429	LS	LUMP SUM	_____.



Proposal Schedule of Items

Proposal ID: 20210608013 Project(s): 1706-00-70

Federal ID(s): WISC 2021375

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0254	SPV.0105 Special 04. Box Culvert Joint Repair C-22-1430	LS	LUMP SUM	_____.
0256	SPV.0105 Special 05. Box Culvert Joint Repair C-22-1431	LS	LUMP SUM	_____.
0258	SPV.0105 Special 06. Vegetation Removal C-22-1429	LS	LUMP SUM	_____.
0260	SPV.0105 Special 07. Vegetation Removal C-22-1430	LS	LUMP SUM	_____.
0262	SPV.0105 Special 08. Vegetation Removal C-22-1431	LS	LUMP SUM	_____.
0264	SPV.0105 Special 09. Vegetation Removal R-22-7	LS	LUMP SUM	_____.
0266	SPV.0105 Special 10. Vegetation Removal R-22-52	LS	LUMP SUM	_____.
0268	SPV.0165 Special 01. Modular Block Wall Repair	52.000 SF	_____.	_____.
0270	SPV.0165 Special 02. Wall Modular Block Gravity R-22-52	546.000 SF	_____.	_____.
0272	SPV.0180 Special 01. Abutment Seat Cleaning and Sealing	32.000 SY	_____.	_____.
0274	650.6500 Construction Staking Structure Layout (structure) 01. R-22-52	LS	LUMP SUM	_____.
0276	646.1020 Marking Line Epoxy 4-Inch	58,815.000 LF	_____.	_____.
0278	649.0120 Temporary Marking Line Epoxy 4-Inch	91,240.000 LF	_____.	_____.

Section: 0001 Total: \_\_\_\_\_.

Total Bid: \_\_\_\_\_.