



Wisconsin Department of Transportation

October 28, 2021

Division of Transportation Systems Development
Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #21: 1023-00-79, WISC 2022016
Black River Falls - Tomah
Black River - Perry Creek
IH 094
Jackson County

1024-01-75, WISC 2022017
Osseo – Black River Falls
Cth F To Black River (East/West
Bd)
IH 094
Jackson County

Letting of November 9, 2021

This is Addendum No. 01, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
4	Traffic

Schedule of Items:

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
531.2024	Drilling Shaft 24-Inch	LF	0	280	280

Plan Sheets:

Revised Plan Sheets – ID 1023-00-79	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
107	Miscellaneous Quantities (revised table for Signs Type I by adding column showing quantities for Drilling Shaft 24-Inch)

Revised Plan Sheets – ID 1024-01-75	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
115	Miscellaneous Quantities (revised table for Signs Type I by adding column showing quantities for Drilling Shaft 24-Inch)

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01
1023-00-79, 1024-01-75
October 28, 2021

Special Provisions

4. Traffic

*Add the following paragraph after the tables defining peak hours in the section titled **Temporary Single-Lane Closures on Interstate 94**:*

If multiple lane closures are set up for the same direction of Interstate 94 traffic within the limits of Project 1023-00-79 and/or Project 1024-01-75, provide a Basic Traffic Queue Warning System for the first closure only. Subsequent lane closures in that same direction of travel may be regular lane closures. Provide a minimum two miles of separation between successive and separate lane closures utilized for either direction of the IH 94 roadway.

Schedule of Items

Attached, dated October 28, 2021, are the revised Schedule of Items Page 10.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised ID 1023-00-79: 107.

Revised ID 1024-01-75: 115.

END OF ADDENDUM


Addendum No. 1
ID 1023-00-79
Revised Sheet 107
October 28, 2021

SIGNSTYPE II

CATEGORY	NO.	STATION	LOCATION	SIGN CODE	SIGN SIZE (INCHES)	SIGN DESCRIPTION	634.0614 POSTS WOOD 4X6- INCH X 14-FT EACH	634.0616 POSTS WOOD 4X6- INCH X 16-FT EACH	634.0618 POSTS WOOD 4X6- INCH X 18-FT EACH	637.2210 SIGNSTYPE II REFLECTIVEH SF	REMARKS
0010	2-1	63+80	RAMP 'C, LT	D1-2	72X24	(LA) HO-CHUNK NATION	---	---	2	12	
0010	2-2	79+20	RAMP 'A, RT	D1-2	72X24	HO-CHUNK NATION (RA)	---	---	2	12	
0010	14-1	---	STH 54/RED IRON RD	I2-2R	60X36	HO-CHUNK NATION RESERVATION	---	2	---	15	WEST OF PROJECT LIMITS
0010	14-2	---	STH 54/RED IRON RD	D1-2	72X24	HO-CHUNK NATION (RA)	---	2	---	12	WEST OF PROJECT LIMITS
0010	14-3	---	STH 54/RED IRON RD	D1-2	72X24	(LA) HO-CHUNK NATION	2	---	---	12	WEST OF PROJECT LIMITS
0010	14-4	---	STH 54/CHIK	I2-2R	60X36	HO-CHUNK NATION RESERVATION	---	2	---	15	WEST OF PROJECT LIMITS
TOTAL 0010							2	6	4	78	

SIGNSTYPE I

CATEGORY	NO.	APPROX. STATION	LOCATION	SIGN CODE	SIGN SIZE (INCHES)	POST NO.-SIZE	POST LENGTH INSIDE/MIDDLE/OUTSIDE	CY	531.1100 CONCRETE MASONRY ANCILLARY STRUCTURES	531.1140 STEEL REINFORCEMENT HS ANCILLARY STRUCTURES	635.0200 SIGN SUPPORTS REPLACING BASE CONNECTION	637.1220 SIGNSTYPE I REFLECTIVE SH SF	638.2601 REMOVING STRUCTURAL STEEL SIGN SUPPORTS EACH	638.3100 REMOVING STRUCTURAL STEEL SIGN MOUNTED ON SAME POSTS	REMARKS
0010	1-1	1508+00	WB/H 94, LT	E10-61	144X54	---	EXIST	---	---	---	1	54.00	1	---	---
0010	1-2	1522+23	WB/H 94, LT	E1-5P	108X30	---	---	---	---	---	---	22.50	---	---	1-3
0010	1-3	1522+23	WB/H 94, LT	E1-1A	312X162	3--W12X26	22.17/22.8/23.5'	3.6	540	---	---	351.00	1	1	1-2/1-4
0010	1-4	1522+23	WB/H 94, LT	E2-1	156X24	---	---	---	---	---	---	26.00	---	---	1-3
0010	1-5	1526+40	EB/H 94, RT	E1-5P	108X30	---	---	---	---	---	---	22.50	---	---	1-6
0010	1-6	1526+40	EB/H 94, RT	E4-1A	312X132	3--W12X26	20.77/22.4/24.0'	3.6	540	---	---	286.00	1	1	1-5
0010	3-1	1560+10	WB/H 94, LT	E1-5P	108X30	---	---	---	---	---	---	22.50	---	---	3-2
0010	3-2	1560+10	WB/H 94, LT	E4-1A	312X132	3--W12X26	20.77/22.4/24.0'	3.6	540	---	---	286.00	1	1	3-1
0010	4-1	1599+02	EB/H 94, RT	D2-3	168X84	EXIST	EXIST	---	---	---	1	98.00	---	---	---
0010	4-2	1605+64	WB/H 94, LT	E3-1	204X84	2--W12X26	19.07/---/23.0'	2.4	360	---	---	119.00	1	1	---
0010	5-1	1639+94	WB/H 94, LT	E1-5P	108X30	---	---	---	---	---	---	22.50	---	---	5-2
0010	5-2	1639+94	WB/H 94, LT	E1-1A	312X162	3--W12X26	22.17/22.8/23.5'	3.6	540	---	---	351.00	1	1	5-1
TOTAL 0010							16.8	2,520	10,268	2	1,661.00	7	5		



FIELD OFFICE TYPE C

CATEGORY	NO.	STATION	LOCATION	SIGN CODE	SIGN SIZE (INCHES)	SIGN DESCRIPTION	642.5201 FIELD OFFICE TYPE C	REMARKS
0010	1503+82	---	IH 94	---	---	---	0.6	UNDISTRIBUTED
TOTAL 0010							0.6	


Addendum No. 1
ID 1024-01-75
Revised Sheet 115
October 28, 2021

SIGNS TYPE I

CATEGORY	SIGN NO.	APPROX. STATION	LOCATION	SIGN CODE	SIGN SIZE (INCHES)	DESCRIPTION	SIGN INCH X 18-FT REFLECTIVE H	REMARKS
0010	5-1	1487+30	WB IH 94, LT	W13-2	48X60	EXIT 30 MPH	20	2
TOTAL 0010								20

SIGNS TYPE I

CATEGORY	SIGN NO.	APPROX. LOCATION	SIGN CODE	SIGN SIZE (INCHES)	POST NO.-SIZE	POST LENGTH INSIDE/MIDDLE/OUTSIDE	CY	REINFORCEMENT HS ANCHILLARY STRUCTURES TYPES	STEEL LB	SIGN SUPPORTS STRUCTURAL STEEL HS	CONNECTION BOLTS EACH	REMOVING SIGN STRUCTURAL STEEL SIGN SUPPORTS EACH	REMARKS		
0010	2-1	1412+03	WB IH 94, LT	D2-1	192X84	EXIST	---	---	---	---	1	112.00	1	---	
0010	2-2	1416+57	EB IH 94, RT	E1-5P	108X30	---	---	---	---	---	---	22.50	---	---	
0010	2-3	1416+57	EB IH 94, RT	E1-1A	312X162	22.11/22.87/23.5'	3.6	---	540	---	---	351.00	1	2-2	
0010	3-1	1447+48	EB IH 94, RT	E10-61	144X54	EXIST	---	---	---	---	1	54.00	1	---	
0010	4-1	1453+94	EB IH 94, RT	E1-5P	108X30	---	---	---	---	---	---	22.50	---	4-2	
0010	4-2	1453+94	EB IH 94, RT	E4-1A	312X132	21.07/20.07/19.0'	3.6	---	540	---	---	286.00	1	4-1	
0010	5-2	1490+86	WB IH 94, LT	E1-5P	108X30	---	---	---	---	---	---	22.50	---	5-3	
0010	5-3	1490+86	WB IH 94, LT	E4-1A	312X132	20.77/22.47/24.0'	3.6	---	540	---	---	286.00	1	5-2	
0010	5-4	1491+57	EB IH 94, RT	E1-5P	108X30	---	---	---	---	---	---	22.50	---	5-5	
0010	5-5	1491+57	EB IH 94, RT	E1-1A	312X162	23.57/22.57/21.5'	3.6	---	540	---	---	351.00	1	5-4/5-6	
0010	5-6	1491+57	EB IH 94, RT	E2-1	156X24	---	---	---	---	---	---	26.00	---	5-5	
0010	5-7	1497+66	EB IH 94, RT	E3-1	204X84	19.07/---/23.0'	2.4	---	360	---	---	119.00	1	---	
TOTAL 0010								16.8	2,520	140	10,059	2	1,675.00	7	5

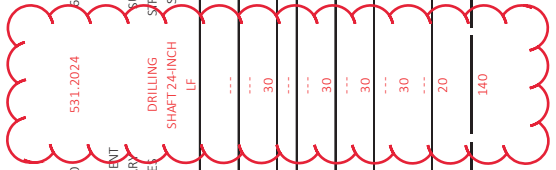

FIELD OFFICE TYPE C

CATEGORY	STATION	TO	STATION	LOCATION	REMARKS
0010	1371+40	-	1498+58	IH 94	UNDISTRIBUTED
TOTAL 0010					0.4

PROJECT NO: 1024-01-75

HWY: IH 94

COUNTY: JACKSON

MISCELLANEOUS QUANTITIES

SHEET: 115

E

FILE NAME: N:\PDS\1030200_mq.ppk

PLOT DATE: June 14, 1911

PLOT BY: A.R.H.

PLOT NAME:

PLOT SCALE: 1:1



Proposal Schedule of Items

Proposal ID: 20211109021 Project(s): 1023-00-79, 1024-01-75

Federal ID(s): WISC 2022016, WISC 2022017

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0276	SPV.0180 Special 07. Continuously Reinforced Concrete Pavement Replacement Special	400.000 SY	_____.	_____.
0278	SPV.0195 Special 01. Asphaltic Base Patching Partial Depth Special	170.000 TON	_____.	_____.
0280	531.2024 Drilling Shaft 24-Inch	280.000 LF	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.