



Wisconsin Department of Transportation

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

January 6, 2022

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

**Proposal #33: Project ID 6933-00-76
Babcock - Nekoosa
CTH G (N) to STH 73
STH 173
Wood County**

Letting of January 11, 2022

This is Addendum No. 01, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
3	Prosecution and Progress

Added Special Provisions	
Article No.	Description
17	Asphaltic Surface

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
465.0105	Asphaltic Surface	TON	50	176	226

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
460.6424	HMA Pavement 3 MT 58-28 S	TON	175	-175	0

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
7	Typical Section: Modify lower layer pavement type for railroad approach pavement
8	Construction Detail: Modify lower layer pavement type for manhole and inlet removal and salvage detail and curb repair detail
86	Miscellaneous Quantities: Deleted bid item 460.6223 and revised quantity for bid item 465.0105
87	Miscellaneous Quantities: Changed bid item 460.6223 to bid item 465.0105

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01

6933-00-76

January 6, 2022

Special Provisions

3. Prosecution and Progress

Replace paragraph seven with the following:

A milled surface open to through traffic shall not remain in place for longer than 72 hours unless adverse weather prevents placement of the asphalt layer. Provide an even cross-sectional profile of the roadway at the end of each day's milling operations on roadways open to through traffic. Uneven lanes on roadways open to through traffic will not be allowed when the final operation completed on either lane was milling. A milled surface is prohibited during the time periods specified in Holidays and Special Events article.

17. Asphaltic Surface

Furnish an asphaltic mixture meeting the requirements specified for an MT mix under 460.2 for the lower layer(s) of roadway pavement.

Schedule of Items





Attached, dated January 6, 2022, are the revised Schedule of Items Pages 1 – 6.


Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:
Revised: 7, 8, 86 and 87.

END OF ADDENDUM

Addendum No. 01
ID 6933-00-76
Revised Sheet 7
January 6, 2022

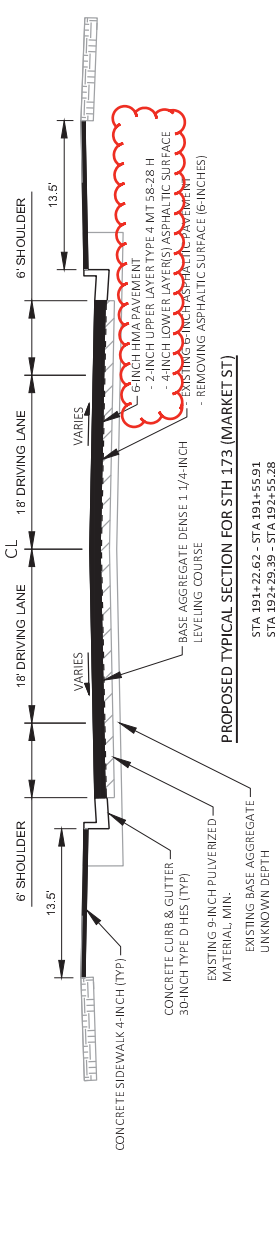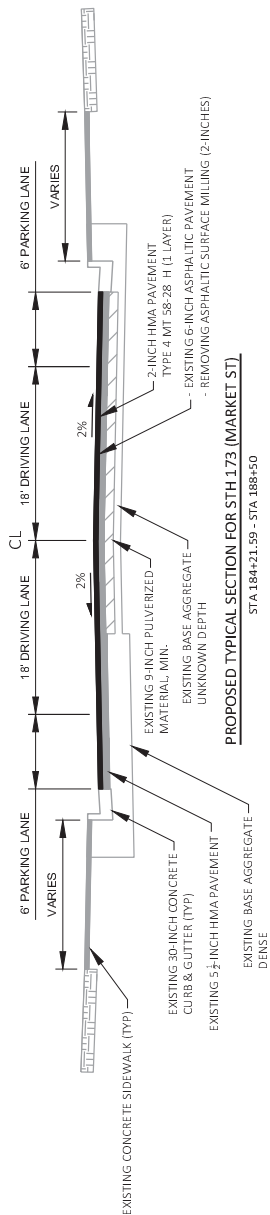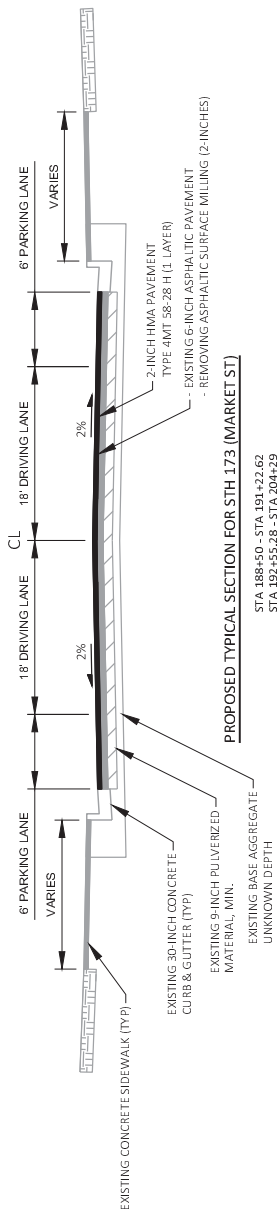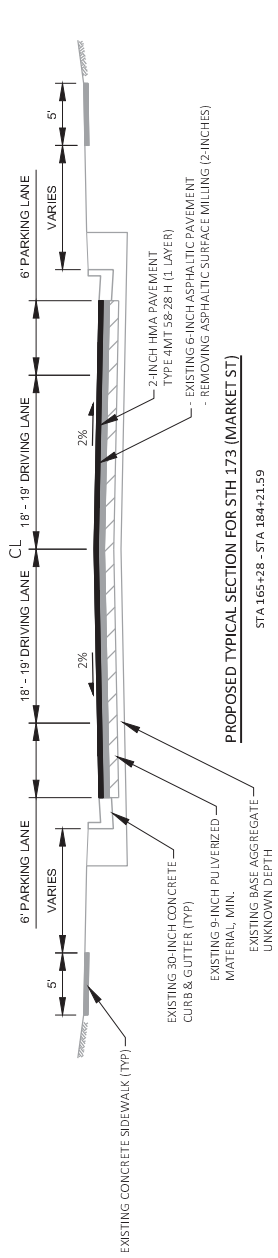

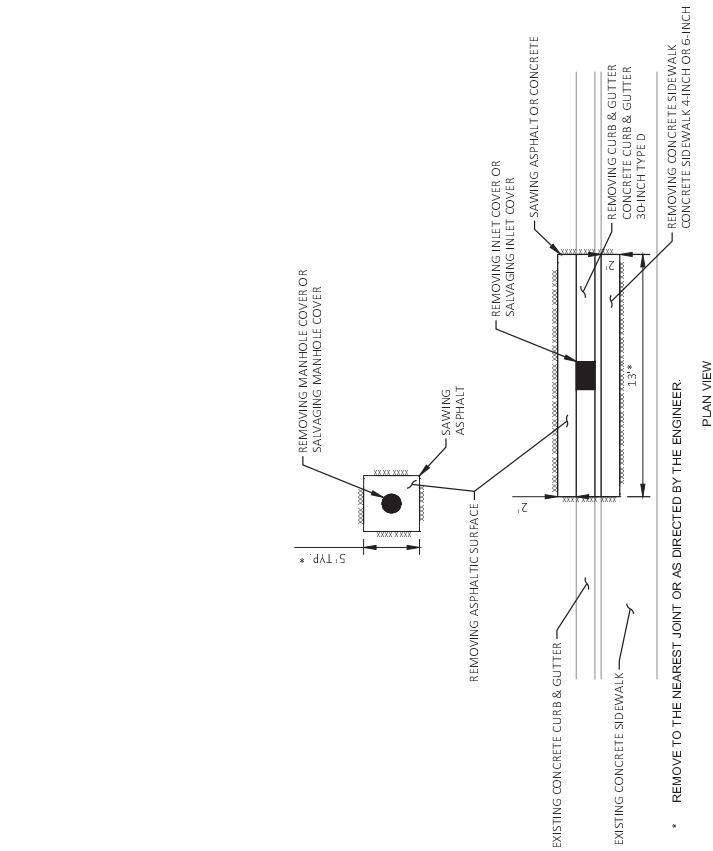

* REMOVE TO THE NEAREST JOINT OR AS DIRECTED BY THE ENGINEER.

PROJECT NO: 6933-00-76

FILE NAME: F:\PROJECTS\6933\6933-00-76\6933-00-76\6933-00-76-01.dwg
LA DOUT NAME: 693300-021001.ctb

HWY: STH 173

COUNTY: WOOD

PLOT DATE: 1/29/2022 3:02 PM

CONSTRUCTION DETAILS


PLOT BY: ANDY WESTBROOK

PILOT NAME: #####


SHEET 8

E

RESTORATION AT CURB RAMP RECONSTRUCTION

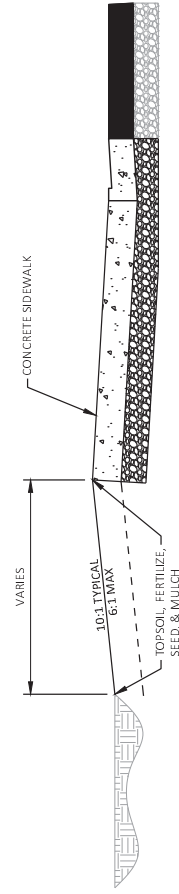

Addendum No. 01
ID 6933-00-76
Revised Sheet 8
January 6, 2022

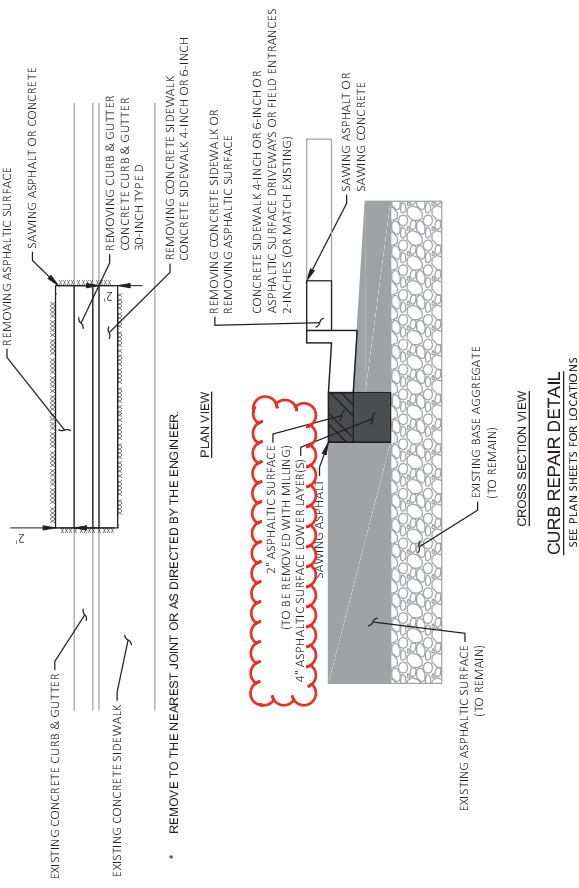

* REMOVE TO THE NEAREST JOINT OR AS DIRECTED BY THE ENGINEER.

CURB REPAIR DETAIL
SEE PLAN SHEETS FOR LOCATIONS

E

Addendum No. 01
ID 6933-00-76
Revised Sheet 86
January 6, 2022

BASE COURSE

STATION TO STATION	LOCATION	305.0110 BASE AGGREGATE DENSE 3/4-INCH	TON	305.0120 BASE AGGREGATE DENSE 1 1/4-INCH	TON	624.0100 WATER	MGAL
PROJECT 6933-00-76							
CATEGORY 0010							
59+00	88+95	STH 173	260	---	---	2	
97+90	112+00	STH 173	120	---	---	1	
WEST RR APPROACH		STH 173	---	15	---	1	
EAST RR APPROACH		STH 173	---	12	---	1	
PROJECT TOTALS			380	27		5	

CONCRETE PAVEMENT

STATION TO STATION	LOCATION	415.1100 CONCRETE PAVEMENT HES 10-INCH	SY
PROJECT 6933-00-76			
CATEGORY 0010			
191+33	192+26	STH 173	260
PROJECT TOTALS			260

HMA PAVEMENT AT CURB REPAIRS AND ASPHALTIC SURFACE

STATION TO STATION	LOCATION	465.0105 ASPHALTIC SURFACE	TON*	465.0120 ASPHALTIC SURFACE DRIVEWAYS & FIELD	TON	465.0110 ASPHALTIC SURFACE PATCHING	TON
PROJECT 6933-00-76							
CATEGORY 0010							
145+08	156+60	STH 173	18	0	0	---	---
156+60	186+60	STH 173	81	2	2	---	---
186+60	204+29	STH 173	48	2	2	---	---
UNDISTRIBUTED			4	6	6	100	100
PROJECT TOTALS			151	10	10		

*ADDITIONAL QTY IN ASPHALTIC ITEMS TABLE.

CONCRETE DRIVEWAYS

STATION	DIR	LOCATION	416.0280 CONCRETE DRIVEWAY HES 8-INCH	SY
PROJECT 6933-00-76				
CATEGORY 0010				
191+25	RT	STH 173	19	
191+65	LT	STH 173	28	
192+40	RT	STH 173	42	
192+40	LT	STH 173	15	
UNDISTRIBUTED			16	
PROJECT TOTALS			120	

Addendum No. 01
 ID 6933-00-76
 Revised Sheet 87
 January 6, 2022

ASPHALTIC ITEMS

STATION TO	STATION	ROADWAY	AREA	PAVEMENT SECTION	TACK COAT GAL	ASPHALTIC SURFACE TON	JMA PAVEMENT 2 MT 58-28 H TON
PROJECT 6933-00-76							
CATEGORY 0010							
59+00	- 86+00	STH 173	LT SHOULDER LT LANE RT LANE	OVERLAY	66	465.0105	460.6424
			RT SHOULDER		216	---	414
			LT LANE		216	---	414
			RT LANE		100	---	192
86+00	- 116+00	STH 173	LT SHOULDER	OVERLAY	103	---	196
			LT LANE		239	---	458
			RT LANE		241	---	462
			RT SHOULDER		133	---	254
116+00	- 144+50	STH 173	LT SHOULDER	OVERLAY	117	---	224
			LT LANE		227	---	435
			RT LANE		229	---	438
			RT SHOULDER		119	---	227
144+50	- 153+00	STH 173	LT SHOULDER	OVERLAY	46	---	88
			LT LANE		62	---	120
			RT LANE		61	---	118
			RT SHOULDER		41	---	79
153+00	- 186+00	STH 173	LT OUTSIDE LANE	OVERLAY	262	---	502
			LT INSIDE LANE		271	---	519
			RT INSIDE LANE		270	---	517
			RT OUTSIDE LANE		271	---	520
186+00	- 191+20	STH 173	LT OUTSIDE LANE	OVERLAY	39	---	74
			LT INSIDE LANE		37	---	72
			RT INSIDE LANE		37	---	70
			RT OUTSIDE LANE		36	---	68
191+20	- 191+55	STH 173	LT OUTSIDE LANE	FULL DEPTH	8	11	5
			LT INSIDE LANE		8	10	5
			RT INSIDE LANE		8	10	5
			RT OUTSIDE LANE		8	11	5
192+29	- 192+55	STH 173	LT OUTSIDE LANE	FULL DEPTH	7	9	4
			LT INSIDE LANE		6	8	4
			RT INSIDE LANE		6	8	4
			RT OUTSIDE LANE		7	9	4
192+55	- 203+75	STH 173	LT OUTSIDE LANE	OVERLAY	89	---	171
			LT INSIDE LANE		94	---	180
			RT INSIDE LANE		94	---	180
			RT OUTSIDE LANE		95	---	183
INTERSECTIONS		STH 173	INTERSECTION	OVERLAY	192	---	367
PROJECT TOTALS					4,060	75	7,707



Proposal Schedule of Items

Proposal ID: 20220111033 Project(s): 6933-00-76

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	204.0100 Removing Concrete Pavement	270.000 SY	_____.	_____.
0004	204.0110 Removing Asphaltic Surface	1,275.000 SY	_____.	_____.
0006	204.0115 Removing Asphaltic Surface Butt Joints	831.000 SY	_____.	_____.
0008	204.0120 Removing Asphaltic Surface Milling	58,530.000 SY	_____.	_____.
0010	204.0130 Removing Curb	2.000 LF	_____.	_____.
0012	204.0150 Removing Curb & Gutter	2,220.000 LF	_____.	_____.
0014	204.0155 Removing Concrete Sidewalk	1,070.000 SY	_____.	_____.
0016	204.0195 Removing Concrete Bases	1.000 EACH	_____.	_____.
0018	204.9060.S Removing (item description) 01. Removing Inlet Cover	7.000 EACH	_____.	_____.
0020	204.9060.S Removing (item description) 02. Removing Manhole Cover	11.000 EACH	_____.	_____.
0022	213.0100 Finishing Roadway (project) 01. 6933-00-76	1.000 EACH	_____.	_____.
0024	305.0110 Base Aggregate Dense 3/4-Inch	380.000 TON	_____.	_____.
0026	305.0120 Base Aggregate Dense 1 1/4-Inch	27.000 TON	_____.	_____.
0028	415.1100 Concrete Pavement HES 10-Inch	260.000 SY	_____.	_____.
0030	416.0280 Concrete Driveway HES 8-Inch	120.000 SY	_____.	_____.
0032	455.0605 Tack Coat	4,060.000 GAL	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20220111033 Project(s): 6933-00-76

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0034	460.2000 Incentive Density HMA Pavement	4,900.000 DOL	1.00000	4,900.00
0038	460.6424 HMA Pavement 4 MT 58-28 H	7,707.000 TON	_____	_____
0040	465.0105 Asphaltic Surface	226.000 TON	_____	_____
0042	465.0110 Asphaltic Surface Patching	100.000 TON	_____	_____
0044	465.0120 Asphaltic Surface Driveways and Field Entrances	10.000 TON	_____	_____
0046	601.0411 Concrete Curb & Gutter 30-Inch Type D	2,100.000 LF	_____	_____
0048	601.0600 Concrete Curb Pedestrian	190.000 LF	_____	_____
0050	602.0405 Concrete Sidewalk 4-Inch	5,400.000 SF	_____	_____
0052	602.0415 Concrete Sidewalk 6-Inch	4,850.000 SF	_____	_____
0054	602.0515 Curb Ramp Detectable Warning Field Natural Patina	648.000 SF	_____	_____
0056	611.0530 Manhole Covers Type J	11.000 EACH	_____	_____
0058	611.0624 Inlet Covers Type H	2.000 EACH	_____	_____
0060	611.0639 Inlet Covers Type H-S	5.000 EACH	_____	_____
0062	611.8110 Adjusting Manhole Covers	2.000 EACH	_____	_____
0064	611.8115 Adjusting Inlet Covers	4.000 EACH	_____	_____
0066	611.9705 Salvaged Manhole Covers	2.000 EACH	_____	_____



Proposal Schedule of Items

Proposal ID: 20220111033 Project(s): 6933-00-76

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0068	611.9710 Salvaged Inlet Covers	4.000 EACH	_____.	_____.
0070	618.0100 Maintenance And Repair of Haul Roads (project) 01. 6933-00-76	1.000 EACH	_____.	_____.
0072	619.1000 Mobilization	1.000 EACH	_____.	_____.
0074	624.0100 Water	5.000 MGAL	_____.	_____.
0076	625.0100 Topsoil	850.000 SY	_____.	_____.
0078	627.0200 Mulching	850.000 SY	_____.	_____.
0080	628.7015 Inlet Protection Type C	65.000 EACH	_____.	_____.
0082	629.0210 Fertilizer Type B	0.550 CWT	_____.	_____.
0084	630.0140 Seeding Mixture No. 40	15.000 LB	_____.	_____.
0086	630.0500 Seed Water	2.000 MGAL	_____.	_____.
0088	634.0614 Posts Wood 4x6-Inch X 14-FT	23.000 EACH	_____.	_____.
0090	637.2210 Signs Type II Reflective H	69.000 SF	_____.	_____.
0092	638.2102 Moving Signs Type II	7.000 EACH	_____.	_____.
0094	638.2602 Removing Signs Type II	5.000 EACH	_____.	_____.
0096	638.3000 Removing Small Sign Supports	5.000 EACH	_____.	_____.
0098	638.4000 Moving Small Sign Supports	3.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20220111033 Project(s): 6933-00-76

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0100	642.5201 Field Office Type C	1.000 EACH	_____.	_____.
0102	643.0300 Traffic Control Drums	2,577.000 DAY	_____.	_____.
0104	643.0410 Traffic Control Barricades Type II	474.000 DAY	_____.	_____.
0106	643.0420 Traffic Control Barricades Type III	2,352.000 DAY	_____.	_____.
0108	643.0705 Traffic Control Warning Lights Type A	5,590.000 DAY	_____.	_____.
0110	643.0900 Traffic Control Signs	6,729.000 DAY	_____.	_____.
0112	643.0920 Traffic Control Covering Signs Type II	3.000 EACH	_____.	_____.
0114	643.1000 Traffic Control Signs Fixed Message	55.000 SF	_____.	_____.
0116	643.1050 Traffic Control Signs PCMS	28.000 DAY	_____.	_____.
0118	643.1070 Traffic Control Cones 42-Inch	72.000 DAY	_____.	_____.
0120	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0122	644.1410 Temporary Pedestrian Surface Asphalt	125.000 SF	_____.	_____.
0124	644.1601 Temporary Pedestrian Curb Ramp	17.000 DAY	_____.	_____.
0126	644.1810 Temporary Pedestrian Barricade	940.000 LF	_____.	_____.
0128	646.1020 Marking Line Epoxy 4-Inch	10,016.000 LF	_____.	_____.
0130	646.1040 Marking Line Grooved Wet Ref Epoxy 4-Inch	10,510.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20220111033 Project(s): 6933-00-76

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0132	646.3020 Marking Line Epoxy 8-Inch	120.000 LF	_____.	_____.
0134	646.4520 Marking Line Same Day Epoxy 4-Inch	18,038.000 LF	_____.	_____.
0136	646.5020 Marking Arrow Epoxy	2.000 EACH	_____.	_____.
0138	646.5320 Marking Railroad Crossings Epoxy	2.000 EACH	_____.	_____.
0140	646.6120 Marking Stop Line Epoxy 18-Inch	184.000 LF	_____.	_____.
0142	646.7420 Marking Crosswalk Epoxy Transverse Line 6-Inch	3,275.000 LF	_____.	_____.
0144	646.7520 Marking Crosswalk Epoxy Block Style 24-Inch	144.000 LF	_____.	_____.
0146	646.8320 Marking Parking Stall Epoxy	1,480.000 LF	_____.	_____.
0148	646.9200 Marking Removal Line Wide	290.000 LF	_____.	_____.
0150	648.0100 Locating No-Passing Zones	0.990 MI	_____.	_____.
0152	649.0105 Temporary Marking Line Paint 4-Inch	16,756.000 LF	_____.	_____.
0154	650.5500 Construction Staking Curb Gutter and Curb & Gutter	1,500.000 LF	_____.	_____.
0156	650.8000 Construction Staking Resurfacing Reference	14,473.000 LF	_____.	_____.
0158	650.9000 Construction Staking Curb Ramps	53.000 EACH	_____.	_____.
0160	650.9910 Construction Staking Supplemental Control (project) 01. 6933-00-76	LS	LUMP SUM	_____.



Proposal Schedule of Items

Proposal ID: 20220111033 Project(s): 6933-00-76

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0162	653.0900 Adjusting Pull Boxes	7.000 EACH	_____.	_____.
0164	653.0905 Removing Pull Boxes	3.000 EACH	_____.	_____.
0166	690.0150 Sawing Asphalt	3,100.000 LF	_____.	_____.
0168	690.0250 Sawing Concrete	1,350.000 LF	_____.	_____.
0170	740.0440 Incentive IRI Ride	9,244.000 DOL	1.00000	9,244.00
0172	801.0117 Railroad Flagging Reimbursement	5,200.000 DOL	1.00000	5,200.00
0174	SPV.0090 Special 01. Concrete Curb & Gutter HES 30-Inch Type D	102.000 LF	_____.	_____.
0176	SPV.0165 Special 01. Removing Temporary Sidewalk	1,589.000 SF	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.

