



Wisconsin Department of Transportation

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

February 23, 2022

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #39: 7220-00-78, WISC 2022255
Durand - Menomonie
Red Cedar River to 490th Street
STH 25
Dunn County

Letting of March 8, 2022

This is Addendum No. 01, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
3	Prosecution and Progress

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
649.0105	Temporary Marking Line Paint 4-Inch	LF	48,420	48,420	96,840

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
68	Changed Miscellaneous Quantity supplemental description for item 'Barrier System Grading Shaping Finishing' (614.0010) to 'Borrow' instead of 'Excavation Common'.
71	Corrected quantity of 'Temporary Marking Line Paint 4-Inch' (649.0105) from 48,420 LF to 96,840 LF.

ADDENDUM NO. 01

7220-00-78

February 23, 2022

Special Provisions

3. Prosecution and Progress.

*Replace paragraph one under section titled **Work Restrictions** with the following:*

Do not remove guardrail without a lane closure and flagging operation. Shield drop-offs and hazards per standard specification 104.6.1.2.3 and 104.6.1.2.4.

Schedule of Items

Attached, dated February 23, 2022, are the revised Schedule of Items Page 6.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 68 and 71.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

CONCRETE CURB & GUTTER

STATION	STATION	LOCATION	LF	601.0411 CONCRETE CURB & GUTTER 30-INCH TYPE D	601.0557 CONCRETE CURB & GUTTER 6-INCH SLOPED 36-INCH TYPE D	SPV.0090.01 CONCRETE CURB AND GUTTER REPAIR
0+15	0+33	LT	18	LF		
26+25	27+72	RT	--	--		
175+18	176+48	LT	150	--		
309+00	323+20	LT	--	1,420		
PROJECT TOTALS			18	303	1,420	

MOW STRIP

STATION	STATION	LOCATION	(SY)	614.0396 GUARDRAIL MOW STRIP ASPHALT	614.0397 GUARDRAIL MOW STRIP EMULSIFIED ASPHALT
2+87	3+37	RT	--	--	28
3+02	6+77	LT	--	--	168
29+92	35+77	RT	--	--	262
29+96	35+42	LT	--	--	241
59+11	63+17	LT	133		48
59+36	63+17	RT	122		48
113+89	121+00	RT	--	--	318
114+50	120+79	LT	--	--	290
241+68	242+67	LT	--	--	46
241+81	242+78	RT	--	--	46
PROJECT TOTALS			255		1,495

MGS GUARDRAIL AND TERMINALS

STATION	STATION	LOCATION	(LF)	614.0400 ADJUSTING STEEL PLATE BEAM GUARD	614.2300 MGS GUARDRAIL 3	614.2330 MGS GUARDRAIL 3 K	614.2610 MGS GUARDRAIL TERMINAL EAT	614.0010 BARRIER SYSTEM GRADING SHAPING FINISHING
3+02	6+77	LT	379					
29+92	35+77	RT	590					
29+96	35+42	LT	542					
59+11	63+17	LT	--	250	275	2	1	
59+36	63+17	RT	--	250	250	2	1	
113+89	121+00	RT	715					
114+50	120+79	LT	653					
241+68	242+67	LT	104					
241+81	242+78	RT	104					
PROJECT TOTALS			3,087	50	525	4	2	

Addendum No. 01
ID 7220-00-78
Revised Sheet 68
February 23, 2022


BARRIER SYSTEM GRADING SHAPING FINISHING ITEM 614.0010 *

STATION	STATION	LOCATION	BORROW (CY)	SALVAGED TOPSOIL (SY)	FERTILIZER TYPE A (CWT)	SEEDING MIXTURE NO. 20 (LB)	SEEDING TEMPORARY (LB)	SEED WATER (MGAL)
57+92	64+36	LT	365	1,075	1	29	29	24
57+92	64+36	RT	400	1,025	1	28	28	23
TOTALS			765	2,100	1	57	57	47

* ITEMS AND QUANTITIES IN THIS TABLE LISTED FOR BID INFORMATION ONLY

***ALL ITEMS CATEGORY 0010 UNLESS OTHERWISE NOTED.

PAVEMENT MARKING

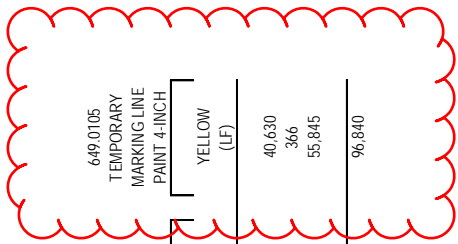

STATION	STATION	646.1020 MARKING LINE EPOXY 4-INCH	646.1040 MARKING LINE GROOVED WET REF EPOXY 4-INCH	646.3020 MARKING LINE EPOXY 8-INCH	646.4520 MARKING LINE SAME DAY EPOXY 4-INCH	646.5020 MARKING ARROW EPOXY	646.6120 MARKING STOP LINE EPOXY 18-INCH	649.0105 TEMPORARY MARKING LINE PAINT 4-INCH
		YELLOW (LF)	WHITE (LF)	WHITE (LF)	YELLOW (LF)	(EACH)	WHITE (LF)	YELLOW (LF)
0+25	- 174+00	22,125	216	115	20,315	3	66	40,630
174+00	- 180+00	290	--	200	183	--	--	366
180+00	- 331+41	28,878	314	395	27,922	--	--	55,845
PROJECT TOTALS		51,823	63,800	710	48,420	3	66	96,840

TRAFFIC CONTROL - DRUMS, BARRICADES, WARNING LIGHTS, AND SIGNS

ROADWAY	SERVICE	NO.	(DAYS)	NO.	(DAYS)	NO.	(DAYS)	NO.	(DAYS)	NO.	(DAYS)	NO.	(DAYS)	COMMENTS
STH 25	92	0	0	0	0	0	0	0	0	50	4,600	2	14	ADVANCE WARNING MAINLINE & SIDE ROADS
														643.0705
460TH ST	20	30	600	0	0	0	0	0	0	1	20	0	0	SEE PLAN SHEETS FOR MORE INFO
														643.0300
380TH AVE	10	32	320	3	30	0	0	0	0	6	60	4	0	SEE PLAN SHEETS FOR MORE INFO
														643.0300
CULVERT REPLACEMENTS	10	50	500	0	0	0	0	0	0	8	80	0	0	SEE PLAN SHEETS FOR MORE INFO
														643.0300
GUARDRAIL SHOULDER WORK	3	108	324	0	0	0	0	0	0	10	30	0	0	FOR REPLACEMENT AND ADJUSTMENT AREAS
														643.0300
PROJECT TOTALS		1,744	30	60	4,770	14								

Addendum No. 01
 ID 7220-00-78
 Revised Sheet 71
 February 23, 2022

***ALL ITEMS CATEGORY 0010 UNLESS OTHERWISE NOTED.



Proposal Schedule of Items

Proposal ID: 20220308039 Project(s): 7220-00-78

Federal ID(s): WISC 2022255

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0160	643.0900 Traffic Control Signs	4,770.000 DAY	_____.	_____.
0162	643.1050 Traffic Control Signs PCMS	14.000 DAY	_____.	_____.
0164	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0166	645.0120 Geotextile Type HR	18.000 SY	_____.	_____.
0168	646.1020 Marking Line Epoxy 4-Inch	51,823.000 LF	_____.	_____.
0170	646.1040 Marking Line Grooved Wet Ref Epoxy 4-Inch	63,800.000 LF	_____.	_____.
0172	646.3020 Marking Line Epoxy 8-Inch	710.000 LF	_____.	_____.
0174	646.4520 Marking Line Same Day Epoxy 4-Inch	48,420.000 LF	_____.	_____.
0176	646.5020 Marking Arrow Epoxy	3.000 EACH	_____.	_____.
0178	646.6120 Marking Stop Line Epoxy 18-Inch	66.000 LF	_____.	_____.
0180	649.0105 Temporary Marking Line Paint 4-Inch	96,840.000 LF	_____.	_____.
0182	650.4500 Construction Staking Subgrade	922.000 LF	_____.	_____.
0184	650.5000 Construction Staking Base	977.000 LF	_____.	_____.
0186	650.5500 Construction Staking Curb Gutter and Curb & Gutter	318.000 LF	_____.	_____.
0188	650.6000 Construction Staking Pipe Culverts	4.000 EACH	_____.	_____.
0190	650.8000 Construction Staking Resurfacing Reference	33,251.000 LF	_____.	_____.

