



Wisconsin Department of Transportation

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

October 26, 2022

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #26: 2702-03-71, WISC 2023028
V Yorkville, Grandview Parkway
S Sylvania Avenue Intersection
Loc Str
Racine County

Letting of November 8, 2022

This is Addendum No. 01, which provides for the following:

Special Provisions:

Added Special Provisions	
Article No.	Description
11	Preparing the Foundation

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
205.0100	Excavation Common	CY	345	-205	140
305.0120	Base Aggregate Dense 1 ¼-Inch	TON	500	-220	280

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
211.0101	Prepare Foundation for Asphaltic Paving (project), 01. 2702-03-71	EA	0	1	1

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
5	Added clarification to pulverize and relay
6	Added clarification to pulverize and relay
15	Added new item and rearranged previous items
16	Rearranged items due to previous sheet revisions
17	Rearranged items due to previous sheet revisions

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01

2702-03-71

October 26, 2022

Special Provisions

11. Prepare the Foundation.

Replace standard spec 211 with the following:

A Description

Prepare the pavement foundation to a condition suitable for construction and supporting the asphalt surface course after the Pulverizing and Relay has been performed

B Materials

C Construction

Construct the foundation to the required alignment and cross -section with equipment and methods adapted for the purpose. After shaping and compacting, provide a smooth foundation, and at the proper elevation and contour.

Fill holes, ruts, and other depressions in the foundation with materials similar to those existing in the foundation.

Excavate and backfill area of yielding of unstable materials with the material the engineer directs.

D Foundation for Asphaltic Surfacing

Prepare aggregate base for asphaltic surfacing sufficiently ahead of surfacing to allow uninterrupted placement

E Aggregate Base

Scarify, shape, trim, and compact, where and as necessary, the surface of the aggregate base to produce the required cross-section contour; a profile free from abrupt changes in elevation; and a surface without pits, hollows, depression, or projections.

Perform shaping and trimming with long-wheel-base motor graders or subgrade finishers designed for the purpose.

F Incorporating or Disposing of Surplus or Unsuitable Material

Dispose of surplus or unsuitable material as specified in 205.3.12.


Schedule of Items

Attached, dated October 26, 2022, are the revised Schedule of Items Pages 1 - 3.

Plan Sheets


The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:
Revised: 5,6, and 15 -17.

END OF ADDENDUM

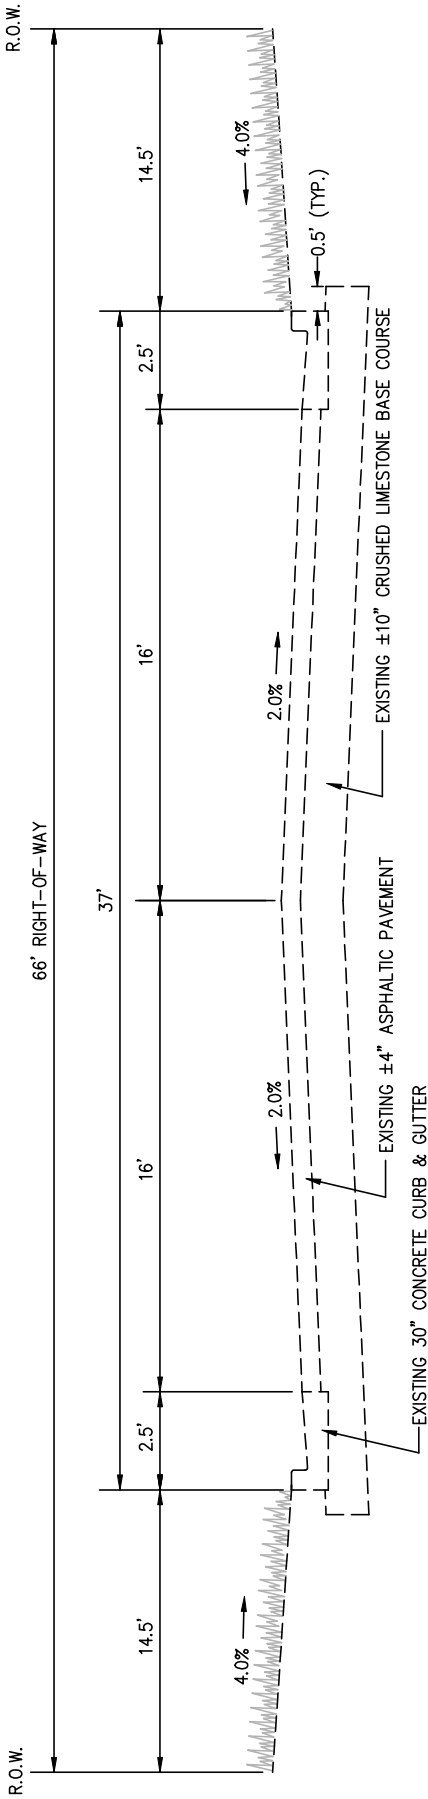

EXISTING TYPICAL SECTION


STA. 10+00 TO STA. 17+00 AND 19+00 TO 32+10.14
(GRANDVIEW PARKWAY & GRANDVIEW PARKWAY WEST)

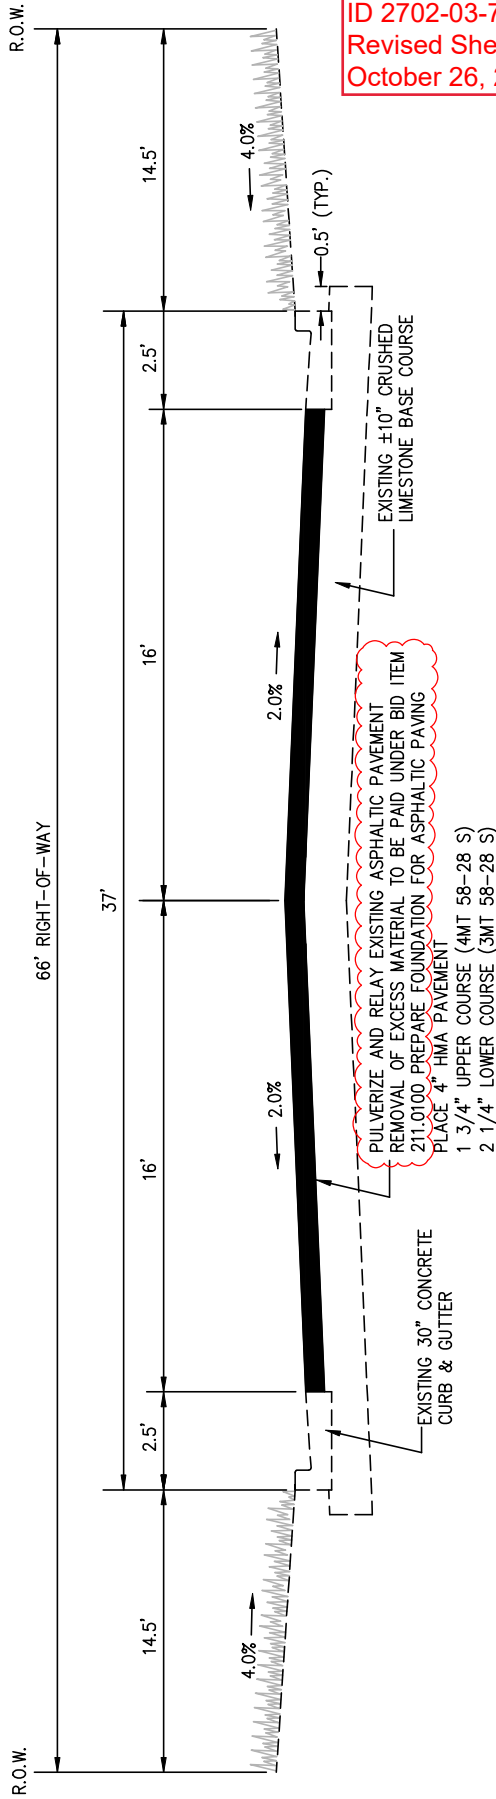

FINISHED TYPICAL SECTION


STA. 10+00 TO STA. 17+00 AND 19+00 TO 32+10.14
(GRANDVIEW PARKWAY & GRANDVIEW PARKWAY WEST)

Addendum No. 01
ID 2702-03-71
Revised Sheet 5
October 26, 2022

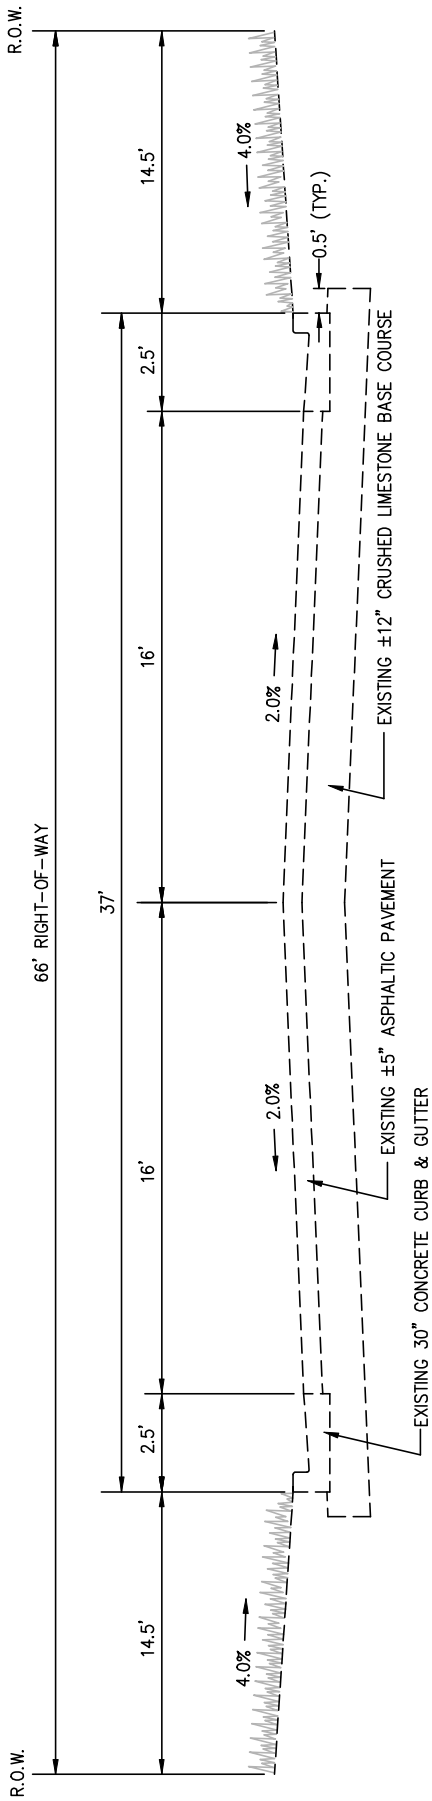

EXISTING TYPICAL SECTION

STA. 17+00 TO 19+00
(GRANDVIEW PARKWAY & GRANDVIEW PARKWAY WEST)

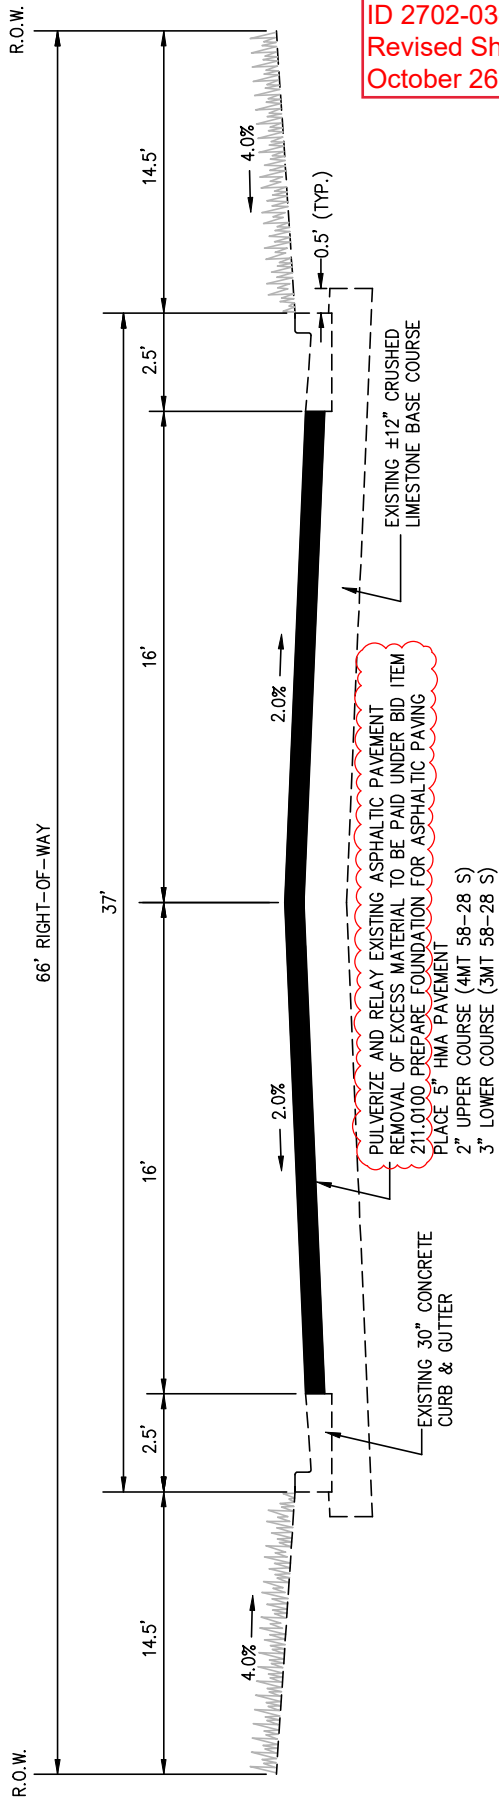

FINISHED TYPICAL SECTION

STA. 17+00 TO 19+00
(GRANDVIEW PARKWAY & GRANDVIEW PARKWAY WEST)

PULVERIZE AND RELAY EXISTING ASPHALTIC PAVEMENT
REMOVAL OF EXCESS MATERIAL TO BE PAID UNDER BID ITEM
211.0100 PREPARE FOUNDATION FOR ASPHALTIC PAVING
PLACE 5" HMA PAVEMENT
2" UPPER COURSE (4MT 58-28 S)
3" LOWER COURSE (3MT 58-28 S)

Addendum No. 01
ID 2702-03-71
Revised Sheet 6
October 26, 2022

NOTE: ALL QUANTITIES ARE CATEGORY 0010 UNLESS OTHERWISE NOTED

204.0150
REMOVING CURB AND GUTTER

204.0150 REMOVING CURB AND GUTTER		204.0150 LF
LOCATION	LF	366
GRANDVIEW PRKWAY		366
UNDISTRIBUTED		-
TOTAL		366

205.0100
EXCAVATION COMMON

205.0100 EXCAVATION COMMON		205.0100 CY
LOCATION	CY	-
GRANDVIEW PRKWAY		140
UNDISTRIBUTED		140
TOTAL		140

211.0101
PREPARE FOUNDATION FOR ASPHALTIC PAVING

211.0101 PREPARE FOUNDATION FOR ASPHALTIC PAVING		211.0101 EACH
LOCATION	EACH	-
GRANDVIEW PRKWAY		1
UNDISTRIBUTED		1
TOTAL		1

213.0100
FINISHING ROADWAY (PROJECT)

213.0100 FINISHING ROADWAY (PROJECT)		213.0100 EACH
LOCATION	EACH	1
GRANDVIEW PRKWAY		1
UNDISTRIBUTED		-
TOTAL		1

305.0120
BASE AGGREGATE DENSE 1 1/4-INCH

305.0120 BASE AGGREGATE DENSE 1 1/4-INCH		305.0120 TON
LOCATION	TON	-
GRANDVIEW PRKWAY		280
UNDISTRIBUTED		280
TOTAL		280

325.0100
PULVERIZE AND RELAY

325.0100 PULVERIZE AND RELAY		325.0100 SY
LOCATION	SY	8,225
GRANDVIEW PRKWAY		8,225
UNDISTRIBUTED		-
TOTAL		8,225

ASPHALTIC PAVEMENT ITEMS

455.0605 TACK COAT	460.6224 HMA PAVEMENT 4MT 58-28 S	460.6223 HMA PAVEMENT 3MT 58-28 S
GAL	TON	TON
845	885	1175
845	885	1175
LOCATION		
GRANDVIEW PRKWAY		
UNDISTRIBUTED		
TOTAL		

601.0105
CONCRETE CURB 30-INCH TYPE A

601.0105 CONCRETE CURB 30-INCH TYPE A		601.0105 CONCRETE CURB TYPE D
LOCATION	LF	52
GRANDVIEW PRKWAY		52
UNDISTRIBUTED		-
TOTAL		52

Addendum No. 01
ID 2702-03-71
Revised Sheet 15
October 26, 2022

NOTE: ALL QUANTITIES ARE CATEGORY 0010 UNLESS OTHERWISE NOTED

601.0409

CONCRETE CURB & GUTTER 30-INCH TYPE

A		601.0409 CONCRETE CURB & GUTTER 30-INCH TYPE D	611.0410 RECONSTRUCTING CATCH BASINS	611.8110 ADJUSTING MANHOLE COVERS
LOCATION	LF		EACH	EACH
GRANDVIEW PRKWAY	314		8	9
UNDISTRIBUTED	-		-	-
TOTAL	314		8	9

611.0410

RECONSTRUCTING CATCH BASINS

LOCATION	EACH	
GRANDVIEW PRKWAY	8	
UNDISTRIBUTED	-	
TOTAL	8	

611.8110

ADJUSTING MANHOLE COVERS

LOCATION	EACH	
GRANDVIEW PRKWAY	9	
UNDISTRIBUTED	-	
TOTAL	9	

618.0100

MAINTENANCE AND REPAIR OF HAUL ROADS (PROJECT)

618.0100 MAINTENANCE AND REPAIR OF HAUL ROADS (PROJECT)		619.1000 MOBILIZATION	625.0100 TOPSOIL
LOCATION	EACH		SY
GRANDVIEW PRKWAY	1		35
UNDISTRIBUTED	-		-
TOTAL	1		35

619.1000

MOBILIZATION

LOCATION	EACH	
GRANDVIEW PRKWAY	1	
UNDISTRIBUTED	-	
TOTAL	1	

625.0100

TOPSOIL

LOCATION	SY	
GRANDVIEW PRKWAY	35	
UNDISTRIBUTED	-	
TOTAL	35	

627.0200
MULCHING

627.0200 MULCHING		628.7015 INLET PROTECTION TYPE C	628.7015 INLET PROTECTION TYPE C	628.7020 INLET PROTECTION TYPE D
LOCATION	SY	LT	EACH	EACH
GRANDVIEW PRKWAY	35	4	4	2
UNDISTRIBUTED	-	-	-	-
TOTAL	35	4	4	2

628.7015

INLET PROTECTION TYPE C

LOCATION	EACH	
GRANDVIEW PRKWAY	4	
UNDISTRIBUTED	-	
SUBTOTAL	4	
TOTAL	7	

628.7020

INLET PROTECTION TYPE D

LOCATION	EACH	
GRANDVIEW PRKWAY	2	
UNDISTRIBUTED	-	
SUBTOTAL	2	
TOTAL	4	

Addendum No. 01
ID 2702-03-71
Revised Sheet 16
October 26, 2022

NOTE: ALL QUANTITIES ARE CATEGORY 0010 UNLESS OTHERWISE NOTED

629.0205
FERTILIZER TYPE A

629.0205 FERTILIZER TYPE A		630.0140 SEEDING MIXTURE	
LOCATION	CWT	LOCATION	LB
GRANDVIEW PRKWAY	0.13	GRANDVIEW PRKWAY	0.65
UNDISTRIBUTED	—	UNDISTRIBUTED	—
TOTAL	0.13	TOTAL	0.65

630.0140
SEEDING MIXTURE No. 40

630.0140 SEEDING MIXTURE		630.0140 SEEDING MIXTURE	
LOCATION	LB	LOCATION	LB
GRANDVIEW PRKWAY	0.65	GRANDVIEW PRKWAY	0.65
UNDISTRIBUTED	—	UNDISTRIBUTED	—
TOTAL	0.65	TOTAL	0.65

650.9911
CONSTRUCTION STAKING
SUPPLEMENTAL CONTROL (PROJECT)

TRAFFIC CONTROL ITEMS

650.9911 CONSTRUCTION STAKING SUPPLEMENTAL CONTROL (PROJECT)		TRAFFIC CONTROL ITEMS		643.0900 TRAFFIC CONTROL SIGNS	
LOCATION	DAY	LOCATION	DAY	LOCATION	DAY
GRANDVIEW PRKWAY	8	TRAFFIC CONTROL BARRICADES TYPE II	4	TRAFFIC CONTROL BARRICADES TYPE III	12
UNDISTRIBUTED	—	UNDISTRIBUTED	—	UNDISTRIBUTED	—
TOTAL	8	TOTAL	4	TOTAL	12

646.1005
MARKING LINE PAINT 4-INCH

646.1005 MARKING LINE PAINT 4-INCH		650.9911 CONSTRUCTION STAKING SUPPLEMENTAL CONTROL (PROJECT)	
LOCATION	LF	LOCATION	LS
GRANDVIEW PRKWAY	5,125	GRANDVIEW PRKWAY	1
UNDISTRIBUTED	—	UNDISTRIBUTED	—
TOTAL	5,125	TOTAL	1

650.9911 CONSTRUCTION STAKING SUPPLEMENTAL CONTROL (PROJECT)		690.0150 SAWING ASPHALT	
LOCATION	LS	LOCATION	LF
GRANDVIEW PRKWAY	1	GRANDVIEW PRKWAY	96
UNDISTRIBUTED	—	UNDISTRIBUTED	—
TOTAL	1	TOTAL	96

SAWING

690.0150 SAWING ASPHALT		690.0250 SAWING CONCRETE	
LOCATION	LF	LOCATION	LF
GRANDVIEW PRKWAY	96	GRANDVIEW PRKWAY	85
UNDISTRIBUTED	—	UNDISTRIBUTED	—
TOTAL	96	TOTAL	85

Addendum No. 01
ID 2702-03-71
Revised Sheet 17
October 26, 2022



Proposal Schedule of Items

Proposal ID: 20221108026 Project(s): 2702-03-71

Federal ID(s): WISC 2023028

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	204.0150 Removing Curb & Gutter	366.000 LF	_____	_____
0004	205.0100 Excavation Common	140.000 CY	_____	_____
0006	213.0100 Finishing Roadway (project) 01. 2702-03-71	1.000 EACH	_____	_____
0008	305.0120 Base Aggregate Dense 1 1/4-Inch	280.000 TON	_____	_____
0010	325.0100 Pulverize and Relay	8,225.000 SY	_____	_____
0012	455.0605 Tack Coat	845.000 GAL	_____	_____
0014	460.2000 Incentive Density HMA Pavement	1,320.000 DOL	1.00000	1,320.00
0016	460.6223 HMA Pavement 3 MT 58-28 S	1,175.000 TON	_____	_____
0018	460.6224 HMA Pavement 4 MT 58-28 S	885.000 TON	_____	_____
0020	601.0105 Concrete Curb Type A	52.000 LF	_____	_____
0022	601.0411 Concrete Curb & Gutter 30-Inch Type D	314.000 LF	_____	_____
0024	611.0410 Reconstructing Catch Basins	8.000 EACH	_____	_____
0026	611.8110 Adjusting Manhole Covers	9.000 EACH	_____	_____
0028	619.1000 Mobilization	1.000 EACH	_____	_____
0030	625.0100 Topsoil	35.000 SY	_____	_____
0032	627.0200 Mulching	35.000 SY	_____	_____



Proposal Schedule of Items

Proposal ID: 20221108026 Project(s): 2702-03-71

Federal ID(s): WISC 2023028

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0034	628.7015 Inlet Protection Type C	7.000 EACH	_____.	_____.
0036	628.7020 Inlet Protection Type D	4.000 EACH	_____.	_____.
0038	629.0205 Fertilizer Type A	0.130 CWT	_____.	_____.
0040	630.0140 Seeding Mixture No. 40	0.650 LB	_____.	_____.
0042	643.0300 Traffic Control Drums	825.000 DAY	_____.	_____.
0044	643.0410 Traffic Control Barricades Type II	2.000 DAY	_____.	_____.
0046	643.0420 Traffic Control Barricades Type III	100.000 DAY	_____.	_____.
0048	643.0900 Traffic Control Signs	250.000 DAY	_____.	_____.
0050	646.1005 Marking Line Paint 4-Inch	5,125.000 LF	_____.	_____.
0052	650.9911 Construction Staking Supplemental Control (project) 01. 2702-03-71	1.000 EACH	_____.	_____.
0054	690.0150 Sawing Asphalt	96.000 LF	_____.	_____.
0056	690.0250 Sawing Concrete	85.000 LF	_____.	_____.
0058	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	1,200.000 HRS	5.00000	6,000.00
0060	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	1,000.000 HRS	5.00000	5,000.00
0062	211.0101 Prepare Foundation for Asphaltic Paving (project) 01. 2702-03-71	1.000 EACH	_____.	_____.
Section: 0001			Total:	_____.

Total Bid: _____.

