



# Wisconsin Department of Transportation

## Division of Transportation Systems Development

Bureau of Project Development  
4822 Madison Yards Way, 4<sup>th</sup> Floor South  
Madison, WI 53705

March 8, 2023

Telephone: (608) 266-1631  
Facsimile (FAX): (608) 266-8459

### NOTICE TO ALL CONTRACTORS:

**Proposal #16: 2656-00-72**  
**C Milwaukee S 70<sup>th</sup> Street**  
**Bridge over CP RR/HAST P-40-856**  
**Loc Str**  
**Milwaukee County**

### Letting of March 14, 2023

This is Addendum No. 01, which provides for the following:

#### Special Provisions:

Revised Special Provisions	
Article No.	Description
6	Utilities

Added Special Provisions	
Article No.	Description
31	AT&T Fiber Optic Protection, Item SPV.0060.015

#### Schedule of Items:

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Quantity Added	Proposal Total After Addendum
SPV.0060.015	AT&T Fiber Optic Protection	EA	0	1	1

**Plan Sheets:**

<b>Revised Plan Sheets</b>	
<b>Plan Sheet</b>	<b>Plan Sheet Title (brief description of changes to sheet)</b>
14	AT&T underground Transmission line added
35	Miscellaneous Quantities; Added AT&T Fiber Optic Protection
117	Added AT&T underground Transmission line. Footing removal depth revised from 4'-0" to 2'-0"

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

*Mike Coleman*

Proposal Development Specialist  
Proposal Management Section

**ADDENDUM NO. 01**

**2656-00-72**

**March 8, 2023**

**Special Provisions**

**6. Utilities.**

*Replace entire section titled AT&T Corp (Transmission) with the following:*

**AT&T Corp**

AT&T Corp. has facilities within the project limits along the north side of the Hank Aaron State Trail (HAST). The existing fiber optic 9-duct package is buried at a depth 6-ft 5-in under the existing grade, and 20-ft north of centerline of the HAST.

Contact Kenneth Nine of AT&T at (574) 842-8830 (office) at least one week prior to bridge pier removal to schedule a technician to be on site for removal of the north bridge pier.

**31. AT&T Fiber Optic Protection, Item SPV.0060.015**

**A Description**

This special provision describes providing protection for the existing AT&T fiber optic nine (9) duct package during construction operations.

**B Materials**

The contractor shall provide materials for the protection of the fiber optic duct package during construction operations.

**C Construction**

AT&T maintains as existing nine (9) fiber optic duct package which is buried at a depth of approximately 6'-5" under the existing grade and located 20' north of center line of the Hank Aaron State Trail. The fiber optic duct package is to remain during the construction.

The contractor shall exercise extra caution while working in the area of the fiber optic cable for removing the existing bridge footing to the specified depth below grade or for excavating for the new bridge elements. Provide protection or use means that will not damage the existing buried cable.

AT&T will require a tech on site once removal of the north bridge pier or excavation in the area of the fiber optic cable is to begin.

Coordinate work at least 7 days in advance of construction with AT&T. Contact Kenneth Nine of AT&T at (574)904-6336 or Knine@jmceainc.com for any question.

**D Measurement**

The department will measure AT&T Fiber Optic Protection as a single complete unit of work in the contract.

**E Payment**

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0060.015	AT&T Fiber Optic Protection	Each

Payment is full compensation for protecting the AT&T Fiber Optic cable during construction.


**Schedule of Items**

Attached, dated March 8, 2023, are the revised Schedule of Items Page 7.

**Plan Sheets**

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:  
Revised: 14, 35 and 17.

END OF ADDENDUM

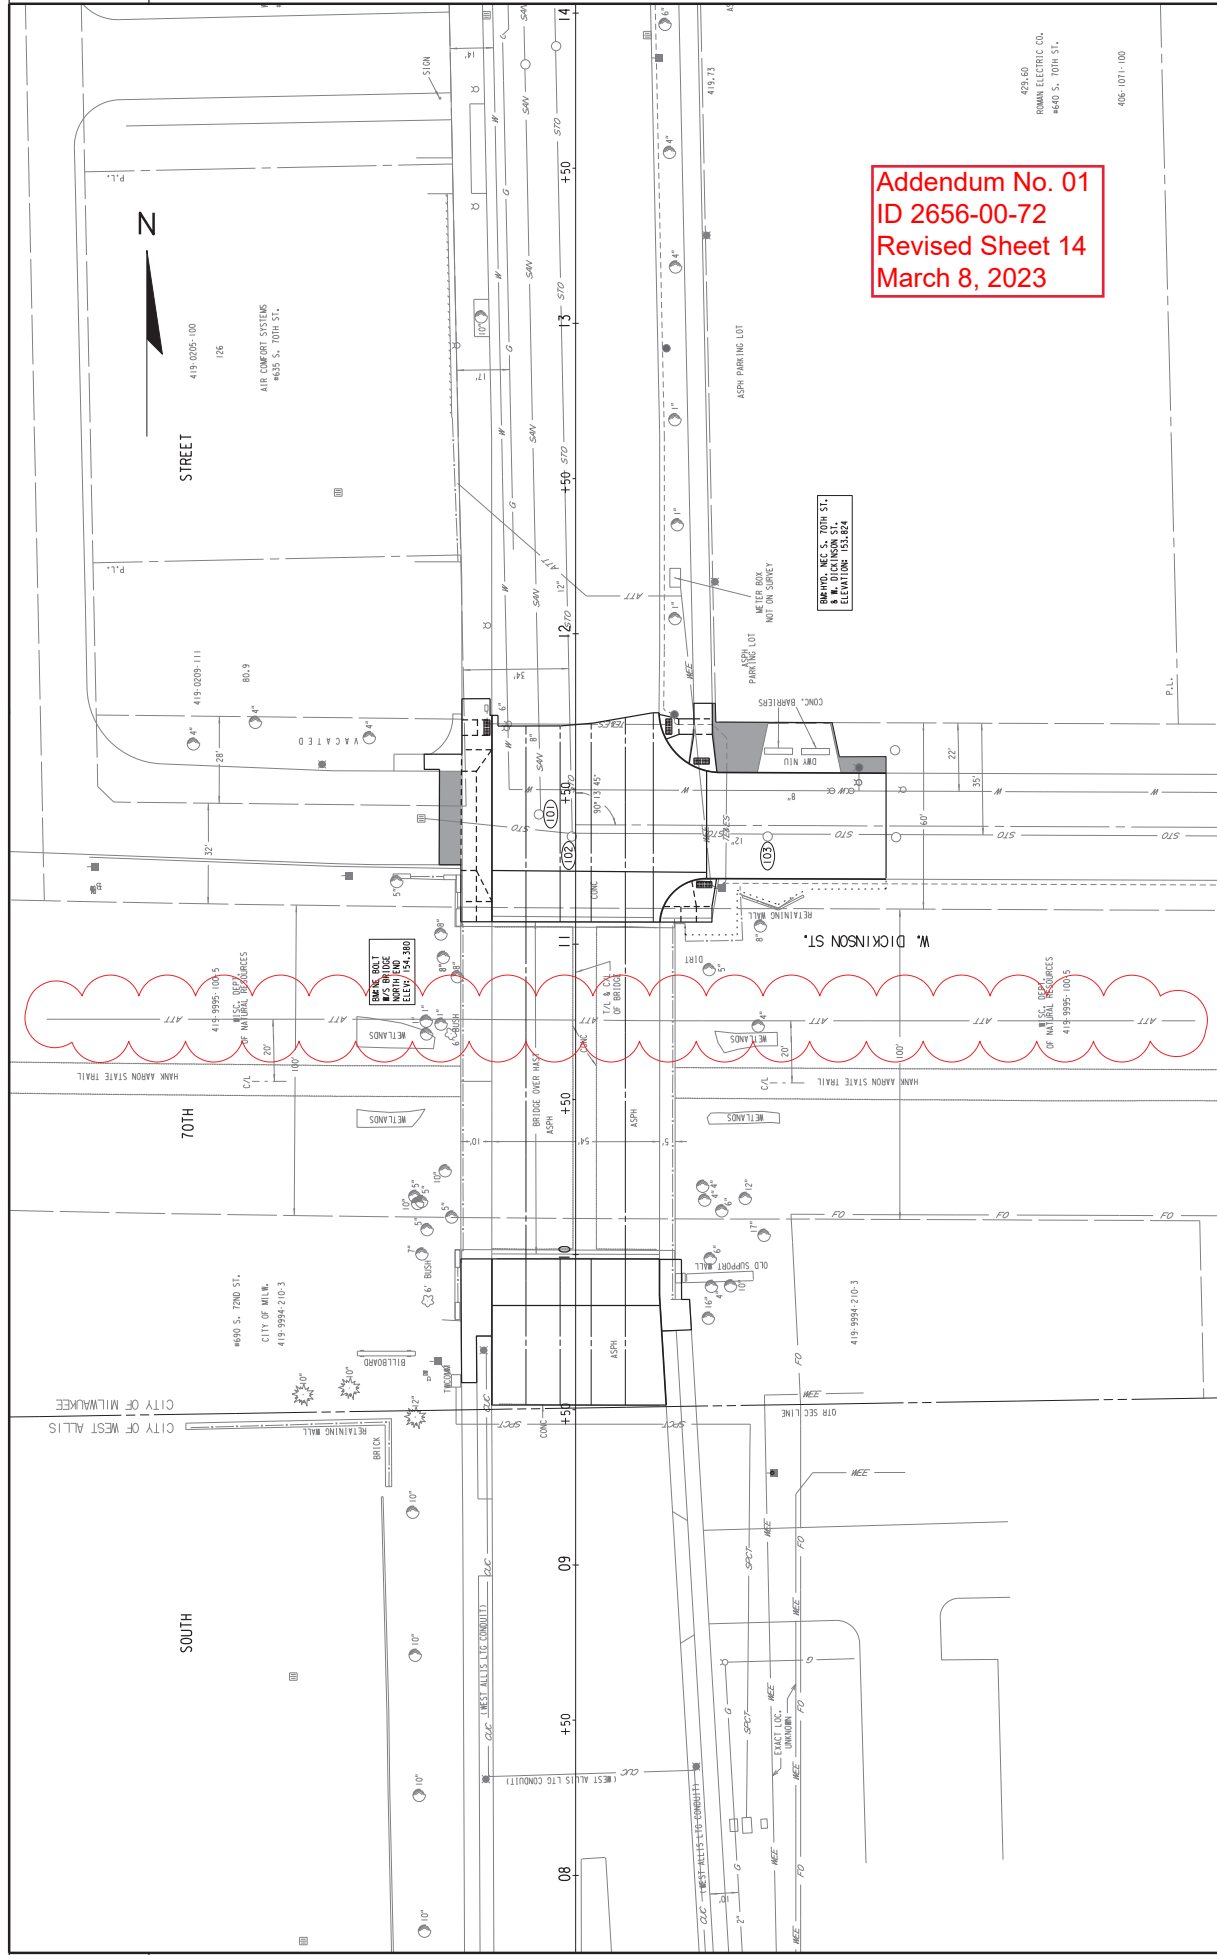

Addendum No. 01  
 ID 2656-00-72  
 Revised Sheet 14  
 March 8, 2023

**FIELD OFFICE**

CATEGORY 0010	642.5201	FIELD OFFICE TYPE C EACH	1
<hr/>			
LOCATION	2656-00-72		
<hr/>			
TOTAL			1

**ADJUSTING WATER BOXES**

CATEGORY 0030	SPV.0060.001	ADJUSTING WATER BOXES EACH	2
<hr/>			
LOCATION	S. 70TH STREET		
<hr/>			
TOTAL			2

**MAINTAINING BIRD NETTING SYSTEM**


CATEGORY 0020	999.2005.S	MAINTAINING BIRD DETERRENT SYSTEM 01. STA. 10+50 EACH	1
<hr/>			
LOCATION	S. 70TH STREET		
<hr/>			
TOTAL			1

**AT&T FIBER OPTIC PROTECTION**

CATEGORY 0020	999.2005.S	AT&T FIBER OPTIC PROTECTION EACH	1
<hr/>			
LOCATION	S. 70TH STREET		
<hr/>			
TOTAL			1

Addendum No. 01  
ID 2656-00-72  
Revised Sheet 35  
March 8, 2023

**STRUCTURE B-40-1008  
S. 70TH ST. OVER CANADIAN  
PACIFIC RAILWAY/HANK  
AARON STATE TRAIL**

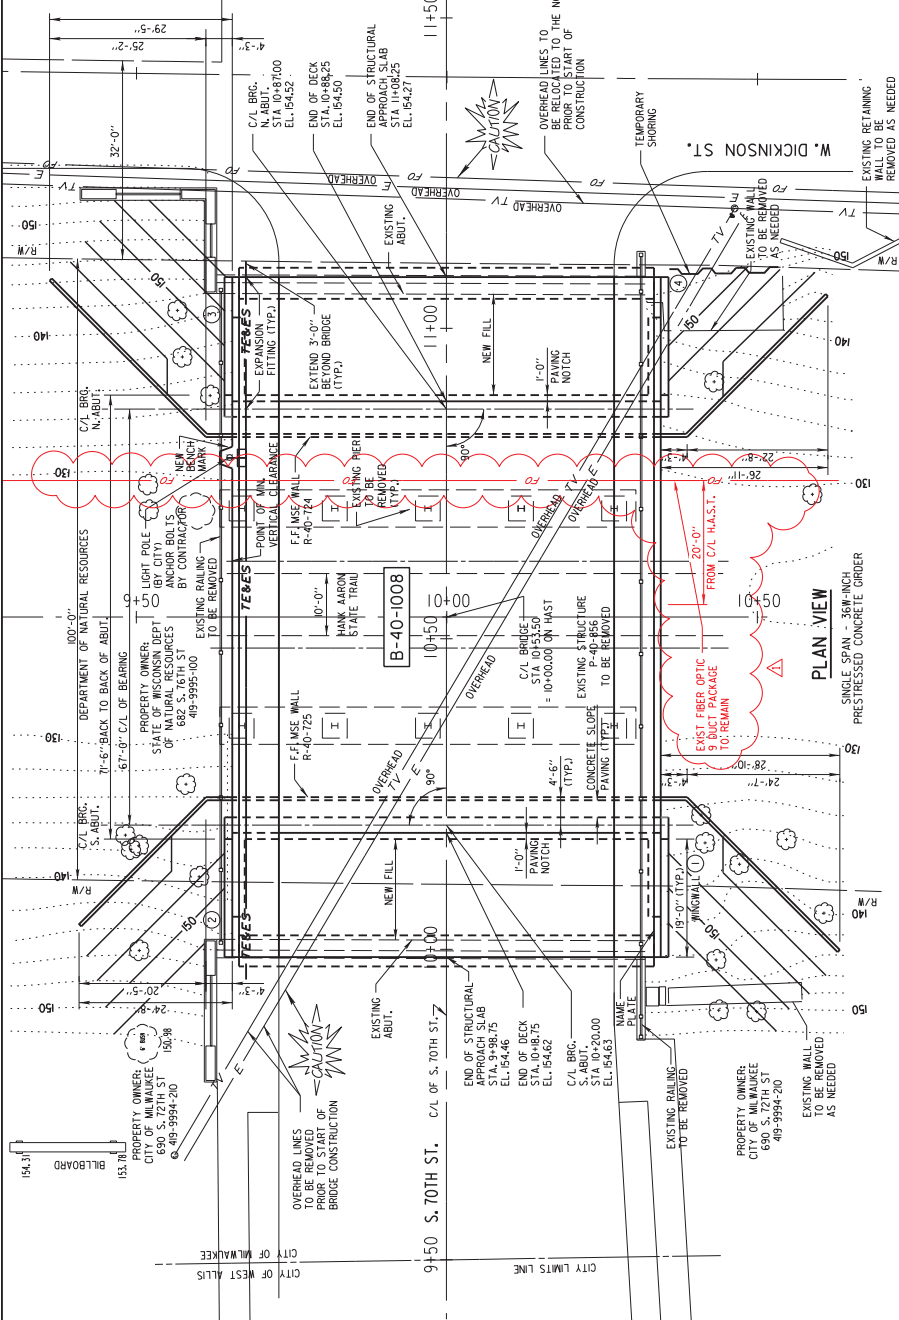

**LIST OF DRAWINGS**

1. SITE PLAN AND ELEVATION
2. CROSS SECTION AND PROFILE
3. ESTIMATE OF QUANTITIES
4. SUBSURFACE EXPLORATION
5. SOUTH ABUTMENT
6. NORTH ABUTMENT
7. ABUTMENT DETAILS
8. SOUTH ABUTMENT WINGWALLS 1 AND 2
9. NORTH ABUTMENT WINGWALLS 3 AND 4
10. ABUTMENT AND WINGWALL BILL OF BARS
11. 36" PRESTRESSED GIRDER DETAILS (2 OF 2)
12. 36" PRESTRESSED GIRDER DETAILS (2 OF 2)
13. INTERMEDIATE STEEL DIAPHRAGMS
14. DECK PLAN
15. DECK CROSS SECTION AND DECK ELEVATIONS
16. LIGHT POLE BASE REINFORCEMENT
17. LIGHT POLE BASE BILL OF BARS
18. DECK BILL OF BARS AND PRESTRESSED GIRDER DETAILS
19. SOUTH STRUCTURAL APPROACH SLAB PLAN
20. NORTH STRUCTURAL APPROACH SLAB PLAN
21. STRUCTURAL APPROACH SLAB DETAILS
22. RAILING ELEVATION
23. RAILING REINFORCEMENT
24. RAILING DETAILS
25. STEEL RAILING DETAILS

PROPERTY OWNER:  
GERVAISE R ROSE  
600 W. MILWAUKEE CORNER OF S. 70TH ST.  
MILWAUKEE, WI 53224  
406-071100

WISDOT BRIDGE OFFICE CONTACT:  
ARON BOK 608-261-0261

CITY OF MILWAUKEE CONTACT:  
JONATHAN THOMAS 442-286-0463

BENCH MARK:  
WISDOT, N.W. CORNER OF S. 70TH ST.  
MILWAUKEE, WI 53224  
ELEVATION: 633.824

03/06/23



**Addendum No. 01  
ID 2656-00-72  
Revised Sheet 117  
March 8, 2023**

NO.	DATE	REVISION	S.S.R.	BY
1	3/2/23	ADD #1 - EXISTING AT&T CORP.		

ORIGINAL PLANS PREPARED BY  
CITY OF MILWAUKEE  
INFRASTRUCTURE SERVICES


STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

ACCEPTED  
CHIEF STRUCTURES DESIGN ENGINEER DATE

**STRUCTURE B-40-1008**  
**S. 70TH ST. OVER CANADIAN  
PACIFIC RAILWAY/HANK  
AARON STATE TRAIL**

COUNTY MILWAUKEE  
DESIGN SPEC. ASPHALT PAVED BRIDGE DESIGN  
DESIGNED BY WISCONSIN INFRASTRUCTURE SERVICES  
BY S.S.R. C.R.D. M.V. S.S.B.

SITE PLAN AND ELEVATION SHEET 117 OF 25

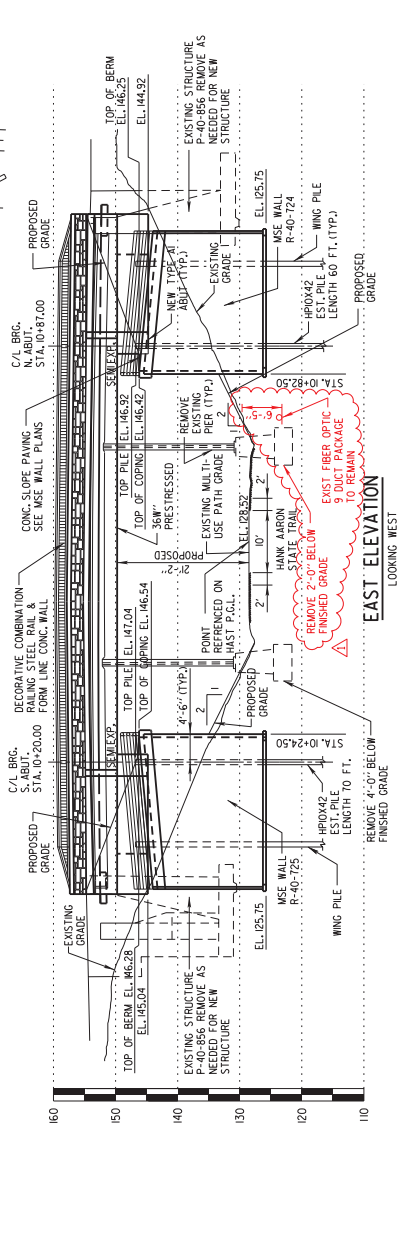



Proposal Schedule of Items

Proposal ID: 20230314016 Project(s): 2656-00-72

Federal ID(s): N/A

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0188	SPV.0060 Special 302. Pull Boxes 13-Inch x 24-Inch x 24-Inch	4.000 EACH	_____.	_____.
0190	SPV.0060 Special 592. Junction Boxes 18-Inch x 12-Inch x 8-Inch	1.000 EACH	_____.	_____.
0192	SPV.0090 Special 308. Electrical Cable Type 3#2/1#8 XLPE	125.000 LF	_____.	_____.
0194	SPV.0165 Special 001. Wall Concrete Panel Mechanically Stabilized Earth R-40-724	2,272.000 SF	_____.	_____.
0196	SPV.0165 Special 002. Wall Concrete Panel Mechanically Stabilized Earth R-40-725	2,243.000 SF	_____.	_____.
0198	SPV.0195 Special 001. Management of Solid Waste	5,750.000 TON	_____.	_____.
0200	SPV.0060 Special 015. AT&T Fiber Optic Protection	1.000 EACH	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.